

**GTK**



**PRODUCT  
CATALOGUE**



## INDEX

<b>ABOUT US</b>	<b>5</b>
<b>AGRICULTURAL TYRES</b>	<b>8-29</b>
<i>Radial Tractor Tyres</i>	9-12
<i>Radial Flotation Tyres</i>	13
<i>Front Tractor Tyres</i>	14-16
<i>Rear Tractor Tyres</i>	17-19
<i>Irrigation Tyres</i>	19
<i>Harvester Tyres</i>	20-21
<i>Flotation Tyres</i>	21-26
<i>Implement Tyres</i>	26-29
<i>Forestry Tyres</i>	29
<b>INDUSTRIAL, EM, OTR TYRES</b>	<b>30-37</b>
<i>Radial Em Tyres</i>	31
<i>Em / Industrial Tyres</i>	31-36
<i>Compactor Tyres</i>	36-37
<i>Forklift Tyres</i>	37
<b>LCV TYRES</b>	<b>38-40</b>
<i>Light Truck &amp; Minibus Tyres</i>	39-40
<b>MPT TYRES</b>	<b>41-43</b>
<i>Military Tyres</i>	42-43



# Trace of Power







## OUR CERTIFICATES



OCCUPATIONAL HEALTH AND  
SAFETY MANAGEMENT



ENVIRONMENTAL  
MANAGEMENT SYSTEM



QUALITY  
MANAGEMENT SYSTEM



INFORMATION SECURITY  
MANAGEMENT SYSTEM





## ABOUT US

GTK is an agricultural and industrial tyre manufacturer which exports to five continents.

It has been growing rapidly since its establishment, and continues to increase the number of countries to which it exports.

Thanks to the quality and trust policies implemented by GTK, it provides a wide product range with its facilities equipped with high technology.

GTK is proceeding with solid steps in the direction of its mission, and aims to be one of the world's largest tyre manufacturers.

# PRODUCT RANGE

## RADIAL TRACTOR TYRES



AGR ALFA

RS200

RS220

## RADIAL FLOTATION TYRES



RF40

## FRONT TRACTOR TYRES



AS10

AS12

AS14

AS16

AS100

## REAR TRACTOR TYRES



AS100

AS110

## IRRIGATION TYRES



AS120

## HARVESTER TYRES



BT48

BT20

AS100

## FLOTATION TYRES



TN52

TN50

TN60

## FLOTATION TYRES



TN70

TN80

BT25

BT22

BT20

BT44

BT40



**IMPLEMENT TYRES**



**BT25**

**BT20**

**AS100**

**BT44**

**BT45**

**BT46**

**FORESTRY TYRES**



**FT80**

**RADIAL EM TYRES**



**RI11**

**EM / INDUSTRIAL TYRES**



**LD94**

**BC70**

**BC80**

**LD90**

**LD92**

**LD96**

**EM / INDUSTRIAL TYRES**



**HP100**

**GD90**

**GD92**

**COMPACTOR TYRES**



**GD94**

**SM40**

**FORKLIFT TYRES**



**CK50**

**LIGHT TRUCK & MINIBUS TYRES**



**KM400**

**KM440**

**TN50**

**KM420**

**MILITARY TYRES**



**OC20**

**OC10**

**OC16**



**GTK**

**AGRICULTURAL  
TYRES**





- Increased traction both on land and on the road with its renewed pattern and double-angle tread structure
- Comfortable driving both in the field and on the road
- Extra protection in the tread area against fatigue and cracking thanks to the increased lug block
- Increased productivity with special pattern design
- High resistance against punctures and tears thanks to 3-layers bar structure



**NEW  
PATTERN**

**AGR ALFA  
RADIAL TRACTOR  
TYRES**

Product Code	Tyre Size	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)		
<b>70 SERIES</b>										
*UR7024380302GTK	380/70 R24	TL	380	1190	125/128	D/A8	1650/3630	23	3556	537
*UR7024420302GTK	420/70 R24	TL	418	1248	130/133	D/A8	1900/4180	23	3720	560
*UR7028380302GTK	380/70 R28	TL	380	1293	127/130	D/A8	1750/3850	23	3879	588
*UR7028420302GTK	420/70 R28	TL	418	1351	133/136	D/A8	2060/4540	23	4043	612
*UR7028480302GTK	480/70 R28	TL	480	1425	140/143	D/A8	2500/5510	23	4253	641
*UR7034480302GTK	480/70 R34	TL	479	1580	143/146	D/A8	2725/6000	23	4739	718
*UR7034520302GTK	520/70 R34	TL	516	1640	148/151	D/A8	3150/6940	23	4908	742
*UR7038480302GTK	480/70 R38	TL	480	1685	145/148	D/A8	2900/6390	23	5067	771
*UR7038520302GTK	520/70 R38	TL	516	1749	150	D	3350/7380	23	5223	793
*UR7038580302GTK	580/70 R38	TL	577	1827	155	D	3875/8540	23	5441	823

- Comfortable drive due to flexible sidewall structure
- Mud repellent feature with its specially designed tread pattern
- High performance due to deep treads and wide base track



## RS200 RADIAL TRACTOR TYRES

Product Code	Tyre Size	TL / TT	Inflated Unloaded Dimensions				Load & Pressure			
			Section Width	Overall Diameter	Load Index	Speed Symbol	Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
<b>65 SERIES</b>										
*UR6516320102GTK	320/65 R16	TL	319	822	117	D	1285/2830	35	2432	367
*UR6520340102GTK	340/65 R20	TL	343	950	124	D	1600/3520	35	2817	427
*UR6520420102GTK	420/65 R20	TL	418	1054	135	D	2180/4800	35	3114	469
UR6524440102GTK	440/65 R24	TL	445	1185	128/131	D/A8	1800/1950	35	3542	535
UR6524480102GTK	480/65 R24	TL	480	1235	133/136	D/A8	2060/2240	35	3683	555
UR6524540102GTK	540/65 R24	TL	550	1320	146/149	D/A8	3000/3250	34	3924	589
UR6526750102GTK	750/65 R26	TL	755	1640	166/163	A8/B	5300/4875	34	4844	722
UR6528440102GTK	440/65 R28	TL	445	1285	131/134	D/A8	1950/2120	35	3857	585
UR6528480102GTK	480/65 R28	TL	480	1337	142/145	D/A8	2650/2900	35	4004	606
UR6528540102GTK	540/65 R28	TL	550	1420	149/152	D/A8	3250/3550	35	4238	639
UR6528600102GTK	600/65 R28	TL	591	1491	154/157	D/A8	3750/4125	34	4439	668
UR6530540102GTK	540/65 R30	TL	550	1470	150/153	D/A8	3350/3650	34	4396	664
*UR6530600102GTK	600/65 R30	TL	601	1542	155	D	3875/8540	35	4546	685
UR6532800102GTK	800/65 R32	TL	800	1858	178/175	A8/B	7500/6900	46	5509	824
UR6534540102GTK	540/65 R34	TL	550	1575	152/155	D/A8	3550/3875	34	4725	716
UR6538540102GTK	540/65 R38	TL	550	1675	153/156	D/A8	3650/4000	34	5039	767
UR6534600102GTK	600/65 R34	TL	601	1644	160/157	D/A8	4515/10040	35	4920	744
UR6538600102GTK	600/65 R38	TL	595	1750	159/162	D/A8	4375/4750	35	5251	797
UR6538650102GTK	650/65 R38	TL	650	1820	163/166	D/A8	4875/5300	34	5449	825
UR6542650102GTK	650/65 R42	TL	650	1913	165/168	D/A8	5150/5600	34	5744	872
<b>70 SERIES</b>										
UR7016240102GTK	240/70 R16	TL	245	745	104/104	A8/B	900/900	34	2234	339
UR7016260102GTK	260/70 R16	TL	260	770	109/109	A8/B	1030/1030	34	2305	349
UR7016280102GTK	280/70 R16	TL	282	798	112/112	A8/B	1120/1120	34	2384	360
UR7018280102GTK	280/70 R18	TL	282	849	114/114	A8/B	1180/1180	34	2544	385
UR7020260102GTK	260/70 R20	TL	260	875	113/113	A8/B	1150/1150	34	2634	401
UR7020280102GTK	280/70 R20	TL	282	900	116/116	A8/B	1250/1250	34	2704	411
UR7020300102GTK	300/70 R20	TL	295	952	120/117	A8/B	1400/1285	34	2851	432
UR7020320102GTK	320/70 R20	TL	319	982	113/113	A8/B	1150/1150	23	2936	444
UR7020360102GTK	360/70 R20	TL	357	1042	129/129	A8/B	1850/1850	34	3106	468
UR7020380102GTK	380/70 R20	TL	380	1082	122/122	A8/B	1500/1500	23	3219	484
UR7024320102GTK	320/70 R24	TL	319	1095	116/116	A8/B	1250/1250	23	3288	499
UR7024360102GTK	360/70 R24	TL	357	1152	122/122	A8/B	1500/1500	23	3449	522
UR7024380102GTK	380/70 R24	TL	380	1190	125/125	A8/B	1650/1650	23	3556	537
UR7024420102GTK	420/70 R24	TL	418	1248	130/130	A8/B	1900/1900	23	3720	560
UR7024460102GTK	460/70 R24	TL	460	1260	152/149	A8/B	3550/3250	46	3754	565
UR7024480102GTK	480/70 R24	TL	480	1320	138/135	A8/B	2360/2180	23	3924	589
UR7026480102GTK	480/70 R26	TL	480	1380	139/136	A8/B	2430/2240	23	4109	618
UR7028360102GTK	360/70 R28	TL	357	1255	125/125	A8/B	1650/1650	23	3772	573
UR7028380102GTK	380/70 R28	TL	380	1293	127/127	A8/B	1750/1750	23	3879	588
UR7028420102GTK	420/70 R28	TL	418	1351	133/133	A8/B	2060/2060	23	4043	612
UR7028480102GTK	480/70 R28	TL	480	1425	140/140	A8/B	2500/2500	23	4253	641
UR7030420102GTK	420/70 R30	TL	418	1400	134/131	A8/B	2120/1950	23	4198	636
UR7030480102GTK	480/70 R30	TL	480	1480	141/138	A8/B	2575/2360	23	4424	668
UR7030600102GTK	600/70 R30	TL	595	1605	158/156	A8/B	4250/4000	34	4777	718
UR7034480102GTK	480/70 R34	TL	479	1580	143/140	A8/B	2725/2500	23	4739	718
UR7034520102GTK	520/70 R34	TL	516	1640	148/146	A8/B	3150/3000	23	4908	742
UR7038480102GTK	480/70 R38	TL	480	1685	145/142	A8/B	2900/2650	23	5067	771
UR7038520102GTK	520/70 R38	TL	516	1750	150/147	A8/B	3350/3075	23	5251	797
UR7038580102GTK	580/70 R38	TL	580	1830	155/152	A8/B	3875/3550	23	5477	829
UR7038710102GTK	710/70 R38	TL	720	1965	171/174	D/A8	6150/6700	34	5859	883
UR7042710102GTK	710/70 R42	TL	720	2061	173/176	D/A8	6500/7100	34	6162	931



# RS200 RADIAL TRACTOR TYRES

Product Code	Tyre Size	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)		
<b>80 SERIES</b>										
UR8042480102GTK	480/80 R42	TL	485	1845	151/148	A8/B	3450/3150	23	5552	845
UR8046480102GTK	480/80 R46	TL	485	1945	164/164	A8/B	5000/5000	46	5866	895
<b>85 SERIES</b>										
UR8520280102GTK	280/85 R20 (11.2 R20)	TL	282	984	112/109	A8/B	1120/1030	23	2942	444
UR8520320102GTK	320/85 R20 (12.4 R20)	TL	319	1052	119/116	A8/B	1360/1250	23	3134	472
UR8524250102GTK	250/85 R24 (9.5 R24)	TL	251	1036	109/109	A8/B	1030	23	3121	475
UR8524280102GTK	280/85 R24 (11.2 R24)	TL	282	1086	115/112	A8/B	1215/1120	23	3262	495
UR8524320102GTK	320/85 R24 (12.4 R24)	TL	319	1154	122/119	A8/B	1500/1360	23	3454	523
UR8524340102GTK	340/85 R24 (13.6 R24)	TL	343	1188	125/122	A8/B	1650/1500	23	3551	536
UR8524380102GTK	380/85 R24 (14.9 R24)	TL	380	1256	131/128	A8/B	1950/1800	23	3743	563
UR8524420102GTK	420/85 R24 (16.9 R24)	TL	418	1324	137/134	A8/B	2300/2060	23	3935	591
UR8528250102GTK	250/85 R28 (9.5 R28)	TL	251	1137	112/112	A8/B	1120	23	3406	516
UR8528280102GTK	280/85 R28 (11.2 R28)	TL	282	1187	118/115	A8/B	1320/1215	23	3580	546
UR8528320102GTK	320/85 R28 (12.4 R28)	TL	320	1255	124/121	A8/B	1600/1450	23	3772	573
UR8528340102GTK	340/85 R28 (13.6 R28)	TL	343	1289	127/124	A8/B	1750/1600	23	3868	587
UR8528380102GTK	380/85 R28 (14.9 R28)	TL	380	1357	133/130	A8/B	2060/1900	23	4060	614
UR8528420102GTK	420/85 R28 (16.9 R28)	TL	418	1425	139/136	A8/B	2430/2240	23	4253	641
UR8530380102GTK	380/85 R30 (14.9 R30)	TL	380	1408	135/132	A8/B	2180/2000	23	4220	639
UR8530420102GTK	420/85 R30 (16.9 R30)	TL	418	1476	140/137	A8/B	2500/2300	23	4413	667
UR8530460102GTK	460/85 R30 (18.4 R30)	TL	455	1544	145/142	A8/B	2900/2650	23	4605	694
UR8532320102GTK	320/85 R32 (12.4 R32)	TL	320	1365	126/126	A8/B	1700/1700	34	4115	627
UR8534420102GTK	420/85 R34 (16.9 R34)	TL	418	1578	142/139	A8/B	2650/2430	23	4733	718
UR8534460102GTK	460/85 R34 (18.4 R34)	TL	455	1646	147/144	A8/B	3075/2800	23	4925	745
UR8536320102GTK	320/85 R36 (12.4 R36)	TL	320	1465	128/125	A8/B	1800/1650	23	4429	677
UR8536340102GTK	340/85 R36 (13.6 R36)	TL	343	1495	132/129	A8/B	2000/1850	23	4514	689
UR8538320102GTK	320/85 R38 (12.4 R38)	TL	320	1515	143/143	A8/B	2725/2725	52	4587	703
UR8538340102GTK	340/85 R38 (13.6 R38)	TL	343	1545	133/130	A8/B	2060/1900	23	4672	715
UR8538380102GTK	380/85 R38 (14.9 R38)	TL	380	1611	139/136	A8/B	2430/2240	23	4858	741
UR8538420102GTK	420/85 R38 (16.9 R38)	TL	418	1679	144/141	A8/B	2800/2575	23	5050	768
UR8538460102GTK	460/85 R38 (18.4 R38)	TL	455	1747	149/146	A8/B	3250/3000	23	5243	795
UR8538520102GTK	520/85 R38 (20.8 R38)	TL	516	1849	155/152	A8/B	3875/3550	23	5531	836
UR8538650102GTK	650/85 R38	TL	650	2071	173/176	D/A8	6500/7100	34	6159	925
UR8542520102GTK	520/85 R42 (20.8 R42)	TL	516	1955	157/157	A8/B	4125/4125	23	5863	889
UR8546340102GTK	340/85 R46 (13.6 R46)	TL	345	1756	150/151	D/A8	3350/3450	52	5332	819
UR8548340102GTK	340/85 R48 (13.6 R48)	TL	343	1800	151/152	D/A8	3450/3550	58	5472	842
<b>90 SERIES</b>										
UR9046320102GTK	320/90 R46	TL	320	1750	146/146	A8/B	3000/3000	46	5315	817
UR9046380102GTK	380/90 R46	TL	380	1860	159/162	D/A8	4375/4750	58	5626	861
UR9050320102GTK	320/90 R50	TL	320	1850	150/150	A8/B	3350/3350	52	5630	867
UR9054320102GTK	320/90 R54	TL	320	1950	155/155	A8/B	3875/3875	58	5944	917
<b>95 SERIES</b>										
UR0020095102GTK	9,5 R20	TL	241	938	108/105	A8/B	1000/925	23	2812	426
UR9532210102GTK	210/95 R32	TL	215	1215	114/114	A8/B	1180/1180	34	3691	567
UR9532230102GTK	230/95 R32	TL	230	1255	128/128	A8/B	1800/1800	58	3804	583
UR9532270102GTK	270/95 R32	TL	275	1330	136/136	A8/B	2240/2240	58	4016	613
UR9536210102GTK	210/95 R36	TL	215	1320	118/118	A8/B	1320/1320	34	4019	619
UR9536230102GTK	230/95 R36	TL	230	1355	130/130	A8/B	1900/1900	58	4118	633
UR9536270102GTK	270/95 R36	TL	275	1435	139/139	A8/B	2430/2430	58	4345	665
UR9538270102GTK	270/95 R38	TL	275	1485	140/140	A8/B	2500/2500	58	4502	691
UR9542230102GTK	230/95 R42	TL	230	1505	133/136	D/A8	2060/2240	58	4590	709
*UR9542270102GTK	270/95 R42	TL	275	1581	141	A8	2575/5670	58	4788	737
UR9544210102GTK	210/95 R44	TL	215	1520	120/120	A8/B	1400/1400	34	4649	720
UR9544230102GTK	230/95 R44	TL	230	1560	132/132	A8/B	2000/2000	58	4762	736
UR9544270102GTK	270/95 R44	TL	275	1635	142/142	A8/B	2650/2650	58	4974	766
UR9546270102GTK	270/95 R46	TL	275	1685	143/143	A8/B	2725/2725	58	5131	791
UR9546300102GTK	300/95 R46	TL	300	1740	148/148	A8/B	3150/3150	58	5287	813
UR9548230102GTK	230/95 R48	TL	230	1660	136/136	A8/B	2240/2240	58	5077	786
UR9548270102GTK	270/95 R48	TL	275	1735	144/144	A8/B	2800/2800	58	5289	816
UR9552300102GTK	300/95 R52	TL	300	1900	156/159	D/A8	4000/4375	58	5787	892
UR9554270102GTK	270/95 R54	TL	275	1885	146/146	A8/B	3000/3000	58	5761	891



- Comfortable drive due to flexible sidewall structure
- Mud repellent feature with its specially designed tread pattern
- High performance due to deep treads and wide base track



## RS220 RADIAL TRACTOR TYRES

Product Code	Tyre Size	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
<b>70 SERIES</b>										
UR7042620112GTK	620/70 R42	TL	625	1935	166/166	A8/B	5300/5300	35	5806	881
<b>75 SERIES</b>										
UR7526620112GTK	620/75 R26	TL	630	1600	166/166	A8/B	5300/5300	46	4731	706
UR7530620112GTK	620/75 R30	TL	630	1695	163/161	A8/B	4875/4625	35	5032	754
UR7532650112GTK	650/75 R32	TL	650	1795	172/172	A8/B	6300/6300	46	5331	799





- Ideal for all terrain conditions with its reinforced bead design
- Low soil compact feature thanks to its wide base
- Self-cleaning thanks to its non-directional tread pattern
- Reinforced tread and sidewall profiles against punctures



**NEW  
PATTERN**

**RF40  
RADIAL FLOTATION  
TYRES**

Product Code	Tyre Size	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)		
<b>45 SERIES</b>										
*UR4522560202GTK	560/45 R22.5	TL	564	1076	152	D	3550/7820	58	3222	488
<b>50 SERIES</b>										
*UR5022600202GTK	600/50 R22.5	TL	591	1172	159	D	4373/9640	58	3493	526
<b>60 SERIES</b>										
*UR6022500202GTK	500/60 R22.5	TL	490	1140	155	D	3875/8575	58	3403	513

- Tractor front tyre for general use
- Resistance to stone and impacts thanks to strong and robust body
- Smooth driving with gutters at central back
- Prevention of skidding thanks to treads in shoulders
- Long lasting and economic use
- Excellent performance in highway and land



## AS10 FRONT TRACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U3162011GTK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
U3162021GTK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
U3163011GTK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
U3163021GTK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
U3164011GTK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
U3164021GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363

- Long lasting front tractor tyre
- High maneuverability thanks to nondirectional use feature
- Resistant structure against punctures thanks to increased tread depth



## AS12 FRONT TRACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U3164111GTK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
U3164121GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
U3181021GTK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
U3201021GTK	6.50-20 8PR	TT	175	865	102	A6	850	54	2605	397
U3202021GTK	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417




- Extra strong with its increased tread depth
- Comfortable driving in the field and on the road by pattern design
- Mud-free pattern



## AS14 FRONT TRACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U3162111GTK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
U3162121GTK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
U3163111GTK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
U3163121GTK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
U3164211GTK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
U3164221GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
U3191011GTK	6.00-19 6PR	TT	165	814	93	A6	650	48	2453	374

- Suitable to asphalt and land usage
- Excellent maneuverability and nondirectional use
- Resistant structure against punctures
- Straight movement stability in soft land

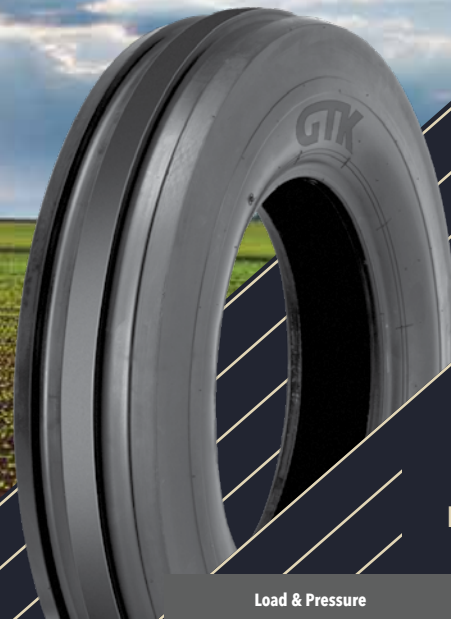

## AS16 FRONT TRACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U3161011GTK	5.50-16 6PR	TT	150	710	86	A6	530	54	2135	325
U3162211GTK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
U3162221GTK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
U3163211GTK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
U3163221GTK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
U3164311GTK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
U3164321GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
U3166021GTK	9.00-16 8PR	TT	234	855	111	A6	1090	45	2545	383
U3167021GTK	10.00-16 8PR	TT	274	895	115	A6	1215	41	2658	399
U3168021GTK	11.00-16 8PR	TT	315	965	118	A6	1320	36	2856	427
U3181221GTK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390



- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



## AS100 FRONT TRACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U3151021GTK	7.50-15 8PR	TT	205	780	99	A6	775	52	2325	350
U3162311GTK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
U3162321GTK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
U3163311GTK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
U3163321GTK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
U3164421GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
U3181421GTK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
U3202121GTK	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417
U3203011GTK	9.5-20 6PR	TT	241	940	101	A6	825	30	2818	427
U3203021GTK	9.5-20 8PR	TT	241	940	106	A6	950	35	2817	427
U3203022GTK	9.5-20 8PR	TL	241	940	106	A6	950	35	2817	427
U3204021GTK	11.2-20 8PR	TT	285	1005	113	A6	1150	38	3001	453
U3204022GTK	11.2-20 8PR	TL	285	1005	113	A6	1150	38	3001	453





- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



## AS100 REAR TRACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure				
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)	
U5241011GTK	8.3-24 6PR	TT	210	1009	105	A6	925	30	3044	465	
U5241021GTK	8.3-24 8PR	TT	210	1009	108	A6	1000	35	3044	465	
U5242011GTK	9.50-24 6PR	TT	241	1050	110	A6	1060	26	3160	481	
U5242021GTK	9.50-24 8PR	TT	241	1050	116	A6	1250	34	3160	481	
U5243011GTK	11.2-24 6PR	TT	284	1105	110	A6	1060	26	3316	503	
U5243021GTK	11.2-24 8PR	TT	284	1105	116	A6	1250	34	3316	503	
U5243041GTK	11.2-24 12PR	TT	284	1105	122	A6	1500	40	3316	503	
U5244011GTK	12.4-24 6PR	TT	315	1160	115	A6	1215	24	3471	525	
U5244021GTK	12.4-24 8PR	TT	315	1160	118	A6	1320	29	3471	525	
U5244121GTK	320/85-24 8PR	TT	315	1160	118	A6	1320	29	3471	525	
U5244041GTK	12.4-24 12PR	TT	315	1160	124	A6	1600	35	3471	525	
U5244141GTK	320/85-24 12PR	TT	315	1160	124	A6	1600	35	3471	525	
U5245011GTK	13.6-24 6PR	TT	345	1210	120	A6	1400	22	3613	545	
U5245021GTK	13.6-24 8PR	TT	345	1210	123	A6	1550	28	3613	545	
U5245041GTK	13.6-24 12PR	TT	345	1210	129	A6	1850	34	3613	545	
U5246011GTK	14.9-24 6PR	TT	378	1265	125	A6	1650	20	3768	567	
U5246021GTK	14.9-24 8PR	TT	378	1265	128	A6	1800	26	3768	567	
U5246121GTK	380/85-24 8PR	TT	378	1265	128	A6	1800	26	3768	567	
U5246031GTK	14.9-24 10PR	TT	378	1265	131	A6	1950	30	3768	567	
U5246131GTK	380/85-24 10PR	TT	378	1265	131	A6	1950	30	3768	567	
U5246051GTK	14.9-24 14PR	TT	378	1265	137	A6	2300	38	3768	567	
U5248021GTK	16.9-24 8PR	TT	429	1335	133	A6	2060	25	3966	595	
U5248031GTK	16.9-24 10PR	TT	429	1335	136	A6	2240	29	3966	595	
U5248051GTK	16.9-24 14PR	TT	429	1335	141	A6	2575	35	3966	595	
U5247042GTK	15.5/80-24 12PR	TL	394	1260	157	A6	4125	44	3754	565	
U5247062GTK	15.5/80-24 16PR	TL	394	1260	163	A6	4875	58	3754	565	
U5261031GTK	14.9-26 10PR	TT	378	1315	133	A6	2060	30	3926	592	
U5262031GTK	18.4-26 10PR	TT	467	1461	142	A6	2650	26	4338	650	
U5262061GTK	18.4-26 16PR	TT	467	1461	153	A6	3650	44	4338	650	
U5261051GTK	14.9-26 14PR	TT	378	1315	140	A6	2500	39	3926	592	
U5281011GTK	11.2-28 6PR	TT	284	1205	112	A6	1120	26	3630	553	
U5281021GTK	11.2-28 8PR	TT	284	1205	118	A6	1320	34	3630	553	
U5282011GTK	12.4-28 6PR	TT	315	1260	117	A6	1285	25	3786	575	
U5282021GTK	12.4-28 8PR	TT	315	1260	125	A6	1650	30	3786	575	
U5282221GTK	320/85-28 8PR	TT	315	1260	125	A6	1650	30	3786	575	
U5283011GTK	13.6-28 6PR	TT	345	1310	121	A6	1450	23	3927	595	
U5283021GTK	13.6-28 8PR	TT	345	1310	125	A6	1650	29	3927	595	
U5284011GTK	14.9-28 6PR	TT	378	1365	125	A6	1650	20	4083	617	
U5284021GTK	14.9-28 8PR	TT	378	1365	130	A6	1900	26	4083	617	
U5284051GTK	14.9-28 14PR	TT	378	1365	143	A6	2725	40	4083	617	
U5285021GTK	16.9-28 8PR	TT	429	1435	135	A6	2180	24	4281	645	
U5285031GTK	16.9-28 10PR	TT	429	1435	139	A6	2430	29	4281	645	
U5285051GTK	16.9-28 14PR	TT	429	1435	143	A6	2725	34	4281	645	
U5301021GTK	14.9-30 8PR	TT	378	1415	132	A6	2000	26	4240	642	
U5301031GTK	14.9-30 10PR	TT	378	1415	136	A6	2240	29	4240	642	
U5302021GTK	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670	

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



## AS100 REAR TRACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure				
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)	
U5302031GTK	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670	
U5302051GTK	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670	
U5302151GTK	420/85-30 14PR	TT	429	1485	150	A6	3350	34	4438	670	
U5303021GTK	18.4-30 8PR	TT	467	1550	139	A6	2430	20	4622	696	
U5303121GTK	460/85-30 8PR	TT	467	1550	139	A6	2430	20	4622	696	
U5303031GTK	18.4-30 10PR	TT	467	1550	145	A6	2900	26	4622	696	
U5303131GTK	460/85-30 10PR	TT	467	1550	145	A6	2900	26	4622	696	
U5303051GTK	18.4-30 14PR	TT	467	1550	154	A6	3750	40	4622	696	
U5303151GTK	460/85-30 14PR	TT	467	1550	154	A6	3750	40	4622	696	
U5321021GTK	8.3-32 8PR	TT	211	1195	111	A6	1090	46	3634	559	
U5322021GTK	9.5-32 8PR	TT	241	1250	115	A6	1215	39	3790	581	
U5323021GTK	12.4-32 8PR	TT	315	1360	125	A6	1650	32	4101	625	
U5341031GTK	16.9-34 10PR	TT	429	1585	142	A6	2650	29	4753	720	
U5341131GTK	420/85-34 10PR	TT	429	1585	142	A6	2650	29	4753	720	
U5341051GTK	16.9-34 14PR	TT	429	1585	148	A6	3150	37	4753	720	
U5341151GTK	420/85-34 14PR	TT	429	1585	148	A6	3150	37	4753	720	
U5342031GTK	18.4-34 10PR	TT	467	1650	146	A6	3000	26	4937	746	
U5342131GTK	460/85-34 10PR	TT	467	1650	146	A6	3000	26	4937	746	
U5342051GTK	18.4-34 14PR	TT	467	1650	155	A6	3875	40	4937	746	
U5361011GTK	12.4-36 6PR	TT	315	1465	121	A6	1450	24	4429	677	
U5361021GTK	12.4-36 8PR	TT	315	1465	126	A6	1700	29	4429	677	
U5362011GTK	13.6-36 6PR	TT	345	1515	125	A6	1650	23	4571	697	
U5362021GTK	13.6-36 8PR	TT	345	1515	129	A6	1850	29	4571	697	
U5381021GTK	12.4-38 8PR	TT	315	1515	127	A6	1750	29	4587	703	
U5382021GTK	13.6-38 8PR	TT	345	1565	131	A6	1950	29	4728	723	
U5382031GTK	13.6-38 10PR	TT	345	1565	135	A6	2180	33	4728	723	
U5383021GTK	14.00-38 8PR	TT	345	1565	131	A6	1950	29	4728	723	
U5383031GTK	14.00-38 10PR	TT	345	1565	135	A6	2180	33	4728	723	
U5384031GTK	15.5-38 10PR	TT	394	1570	138	A6	2360	33	4742	725	
U5384041GTK	15.5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725	
U5385031GTK	16.9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771	
U5385051GTK	16.9-38 14PR	TT	429	1685	152	A6	3550	40	5067	771	
U5386031GTK	18.4-38 10PR	TT	467	1750	147	A6	3075	26	5251	797	
U5386051GTK	18.4-38 14PR	TT	467	1750	154	A6	3750	36	5251	797	



- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



## AS110 REAR TRACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U5302221GTK	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670
U5302231GTK	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670
U5302241GTK	16.9-30 12PR	TT	429	1485	147	A6	3075	31	4438	670
U5302251GTK	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
U5384141GTK	15.5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725
U5385131GTK	16.9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



## AS120 IRRIGATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U5243111GTK	11.2-24 6PR (IRRIGATION)	TT	284	1105	110	A6	1060	26	3316	503
U5243121GTK	11.2-24 8PR (IRRIGATION)	TT	284	1105	116	A6	1250	34	3316	503
U5246212GTK	14.9-24 6PR (IRRIGATION)	TL	378	1265	123	A6	1550	20	3768	567
U5246211GTK	14.9-24 6PR (IRRIGATION)	TT	378	1265	123	A6	1550	20	3768	567
U5246221GTK	14.9-24 8PR (IRRIGATION)	TT	378	1265	127	A6	1750	26	3768	567
U5380911GTK	11.2-38 6PR (IRRIGATION)	TT	284	1450	117	A6	1285	19	4403	677
U5380921GTK	11.2-38 8PR (IRRIGATION)	TT	284	1450	122	A6	1500	26	4403	677



- Easy rolling resistance with five-rib design
- Suitable for both on and off road application
- Designed for field / road transport and soil tillage operations with implement machinery and trailers
- Good flotation properties with a high load capacity at low tire pressure



## BT48 HARVESTER TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4242032GTK	9.00-24 10PR	TL	272	1094	124	B	1600	40	3285	499
U4203052GTK	16.0-70.20 14PR	TL	418	1075	154	A6	3750	51	3099	438

- Highway, agricultural and off-road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth



## BT20 HARVESTER TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4181041GTK	10.5/80-18 12PR	TT	274	885	135/123	A8	2180	65	2646	400
U4182051GTK	12.5/80-18 14PR	TT	308	965	144/131	A8	2800	63	2872	432
U4183061GTK	13.0/65-18 16PR	TT	336	890	144/131	A8	2800	71	2660	402



- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



## AS100 HARVESTER TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U5263072GTK	23.1-26 18PR	TL	587	1605	162	A6	4750	37	4746	708
U5303261GTK	18.4-30 16PR	TT	467	1550	158	A6	4250	45	4622	696
U5303361GTK	460/85-30 16PR	TT	467	1550	158	A6	4250	45	4622	696
U5304072GTK	23.1-30 18PR	TL	587	1715	160	A6	4500	36	5088	762
U5342061GTK	18.4-34 16PR	TT	467	1650	159	A6	4375	45	4937	746
U5387061GTK	20.8-38 16PR	TT	528	1840	162	A6	4750	39	5506	833
U5387062GTK	20.8-38 16PR	TL	528	1840	162	A6	4750	39	5506	833

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



## TN52 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4202051GTK	9.00-20 14PR	TT	247	1017	133	A6	2060	81	3035	458



- Resistance to stone and impacts thanks to its improved base
- General purpose trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



## TN50 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4161041GTK	7.50-16 12PR	TT	214	787	121	A8	1450	72	2353	355
U4201051GTK	8.25-20 14PR	TT	234	970	133	A6	2060	90	2902	439

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



## TN60 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4162041GTK	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387
U4162051GTK	9.00-16 14PR	TT	247	865	128	A6	1800	67	2573	387



- Balanced driving and excellent traction thanks to its special design
- Increased water and mud discharge thanks to surrounded gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



## TN70 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4162141GTK	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387
U4162151GTK	9.00-16 14PR	TT	247	865	128	A6	1800	67	2573	387

- Convenient to use in asphalt and land thanks to back pattern
- Durable side wall with strong structure
- Soil holding feature with complex tread structure and channels
- Providing straight location to the ground thanks to back design



## TN80 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4161141GTK	7.50-16 12PR	TT	214	787	121	A8	1450	72	2353	355



- High load bearing capacity with strong structure and less soil compression with its wide base
- Anti-ground tread design



## BT25 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4153442GTK	260/70-15.3 (10.0/75-15.3) 12PR	TL	268	753	126	A8	1700	52	2251	340
U4153552GTK	300/80-15.3 (11.5/80-15.3) 14PR	TL	295	869	141	A8	2575	58	2579	386
U4153052GTK	12.5/80-15.3 14PR	TL	307	889	142	A8	2650	62	2636	394

- Soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers
- The special tread compound resulting in exceptional cut and strong tread along with excellent wear resistance on all types of terrains



## BT22 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4173052GTK	500/50-17 14PR	TL	503	932	149	A8	3250	41	2771	416
U4173072GTK	500/50-17 18PR	TL	503	932	157	A8	4125	70	2771	416



- Highway, agricultural and off-road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth



## BT20 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4151042GTK	10.0/75-15.3 (260/70-15.3) 12PR	TL	264	760	126	A8	1700	68	2271	343
U4151052GTK	10.0/75-15.3 (260/70-15.3) 14PR	TL	264	760	130	A8	1900	80	2271	343
U4152052GTK	11.5/80-15.3 (300/80-15.3) 14PR	TL	290	845	139	A8	2430	69	2511	377
U4153152GTK	12.5/80-15.3 (320/80-15.3) 14PR	TL	307	889	142	A8	2650	62	2636	394
U4163041GTK	10.5/65-16 (265/65-16) 12PR	TT	274	755	126	A8	1700	65	2262	343

- High load bearing capacity with low section off-road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern



## BT44 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4151142GTK	10.0/75-15.3 12PR	TL	264	760	126	A8	1700	68	2271	343
U4152152GTK	11.5/80-15.3 14PR	TL	290	845	139	A8	2430	69	2511	377
U4153252GTK	12.5/80-15.3 14PR	TL	307	889	142	A8	2650	62	2636	394



- Extra strong against stretching thanks to strong frame structure
- Flexibility and deep tread profile



## BT40 FLOTATION TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U4153362GTK	12.5/80-15.3 16PR	TL	307	889	144	A8	2800	71	2636	394
U4153672GTK	400/60-15.5 18PR	TL	404	874	151	A8	3450	90	2595	389
U4221062GTK	550/60-22.5 16PR	TL	543	1244	154	A8	3750	41	3697	555

- Low rolling resistance
- High comfort
- Preventing skidding thanks to its special pattern
- Low soil compact feature thanks to its wide base



## BT25 IMPLEMENT TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U1124032GTK	10.0/80-12 10PR	TL	261	671	116	A8	1250	57	1993	299



- High tread depth
- Low rolling resistance
- High comfort
- Low soil compact feature thanks to its wide base



## BT20 IMPLEMENT TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U1124132GTK	10.0/80-12 10PR	TL	264	710	116	A8	1250	57	2103	314

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



## AS100 IMPLEMENT TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U1152011GTK	6.50/80-15 6PR	TT	163	663	96	A6	710	52	1994	303



- High load bearing capacity with low section off-road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern



## BT44 IMPLEMENT TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure				
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)	
U1121001GTK	5.00-12 4PR	TT	145	580	62	A6	265	32	1736	262	
U1123011GTK	7.00-12 6PR	TT	200	683	83	A6	487	36	2027	304	
U1131011GTK	6.50/80-13 6PR	TT	170	640	82	A6	475	52	1913	289	

- High traction ability thanks to its angle blocks
- Easy movement ability thanks to anti-ground base design
- Preventing clusters in the center and sidewalls during movement of tractor thanks to its open design in center
- Facilitating releasing of muds thanks to windowed blocks



## BT45 IMPLEMENT TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure				
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)	
U1122011GTK	6.50/80-12 6PR	TT	163	588	80	A6	450	52	1758	266	



- Proper use in lands and gardens
- Strong and robust structure
- Preventing skidding thanks to its special pattern
- Long lasting and economic use
- Optimum performance with small-type gardening and agriculture vehicles



## BT46 IMPLEMENT TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U1151011GTK	5.00-15 6PR	TT	145	655	76	A6	400	50	1972	300

- Specially designed for forestry application
- Special tread and sidewall compound provides maximum tire life against cut and crack resistance
- Excellent puncture resistance thanks to strong breaker construction shoulder to shoulder,
- Lower lug angle providing excellent grip and self cleaning properties for logging operations
- Tie-bar on the central lugs protects the tire against deep impacts.



## FT80 FORESTRY TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U5262262GTK	18.4-26 16PR	TL	467	1461	153	A6	3650	44	4338	650



**GTK**

**INDUSTRIAL, EM  
OTR TYRES**





- High traction and comfort • Longer service life
- Comfortable drive due to flexible sidewall structure • Strong carcass structure
- Resistance to fatigue due to wide shoulder and blocks • Strong tread compound for cut-resistance • High performance due to wide base track
- Mud repellent feature due to specially designed tread pattern



## RI11 RADIAL EM TYRES

Product Code	Tyre Size	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
UR7024460712GTK	460 / 70 R 24	TL	455	1255	159/159	A8/B	4375/4375	58	3740	563
UR8024440712GTK	440 / 80 R 24	TL	450	1320	154/154	A8/B	3750/3750	46	3924	589
UR8028440712GTK	440 / 80 R 28	TL	450	1420	156/156	A8/B	4000/4000	46	4238	639

- Resistance to stone cuts, cracks and breaks
- Long wear-life



## LD94 EM / INDUSTRIAL TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6202061GTK	10.00-20 16PR	TT	283	1084	146 / 143	B	3000	109	3225	484
U6202062GTK	10.00-20 16PR	TL	283	1084	146 / 143	B	3000	109	3225	484



- Long wear-life
- Cracking / fatigue resistance at treads
- Maximum traction
- Increased sidewall protection



## BC70 EM / INDUSTRIAL / TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6161042GTK	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352
U6162052GTK	12-16.5 14PR	TL	320	846	148	A3	3150	90	2524	380

- High traction and comfort
- Designed compatible with scrap operations and recycling process
- Excellent maneuverability at high tonnage due to reinforced shoulder blocks.
- Comfortable drive due to flexible sidewall structure
- Reinforced back structure
- Longer life due to improved back structure
- Wear resistance due to special back combination



## BC80 EM / INDUSTRIAL TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6161142GTK	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352
U6162152GTK	12-16.5 14PR	TL	320	846	148	A3	3150	90	2524	380
U6182052GTK	12.5/80-18 14PR	TL	305	983	146	A8	3000	62	2923	439



- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life



## LD90

### EM / INDUSTRIAL TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)		
U6161242GTK	10-16.5 12PR	TL	256	793	138	A3	2360	84	2374	359
U6162252GTK	12-16.5 14PR	TL	297	858	148	A3	3150	90	2558	385
U6181042GTK	10.5/80-18 12PR	TL	271	892	135	A8	2180	62	2666	403
U6182152GTK	12.5/80-18 14PR	TL	285	955	146	A8	3000	62	2844	428
U6207062GTK	16.0/70-20 16PR	TL	385	1091	166	A2	5300	65	3244	487
U6207162GTK	405/70-20 16PR	TL	385	1091	166	A2	5300	65	3244	487
U6243062GTK	15.5/80-24 16PR	TL	412	1269	162	A8	4750	72	3780	569
U6245062GTK	16.0/70-24 16PR	TL	418	1200	169	A2	5800	65	3584	541
U6245162GTK	405/70-24 16PR	TL	418	1200	169	A2	5800	65	3584	541
U6246062GTK	16.9-24 16PR	TL	429	1310	154	A8	3750	46	3895	585
U6246162GTK	440/80-24 16PR	TL	429	1310	154	A8	3750	46	3895	585
U6247052GTK	17.5L-24 14PR	TL	475	1277	154	A8	3750	46	3802	572
U6248052GTK	19.5L-24 14PR	TL	495	1314	154	A8	3750	38	3907	587
U6251052GTK	15.5-25 14PR	TL	400	1286	173	A2	6500	68	3836	578
U6261052GTK	18.4-26 14PR	TL	467	1425	160	A8	4500	42	4237	636
U6281052GTK	16.9-28 14PR	TL	429	1410	156	A8	4000	43	4210	635
U6281152GTK	440/80-28 14PR	TL	429	1410	156	A8	4000	43	4210	635
U6301062GTK	16.9-30 16PR	TL	418	1466	156	A8	4000	47	4384	663





- High traction and comfort
- Resistance to any kind of impacts with its back structure
- Comfortable drive due to flexible sidewall structure
- Reinforced bead design
- Reinforced sidewall structure
- Excellent maneuverability at high tonnage due to flexible sidewall structure
- Longer life with its reinforced tread pattern
- Strong tread compound against punctures and impacts
- Longer life due to increased tread number and improved tread depth



## LD92

### EM / INDUSTRIAL TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6182252GTK	12.5/80-18 14PR	TL	304	965	146	A8	3000	62	2872	432

- Robust industrial pattern with higher resistance to puncture and tread wear
- Higher traction with wide pattern design at the center lug
- Reinforced bead design



## LD96

### EM / INDUSTRIAL TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6182352GTK	12.5/80-18 14PR	TL	308	987	146	A8	3000	62	2934	441
U6183052GTK	340/80-18 14PR	TL	343	1001	146	A8	3000	62	2974	446
U6207262GTK	16.0/70-20 16PR	TL	385	1091	166	A2	5300	65	3244	487
U6206052GTK	14.5-20 14PR	TL	355	1095	143	D	2725	51	3256	489



- Strong and durable thanks to excellent design
- Its compound resistant to wear, and its blocks resistant to heavy conditions with long maintenance periods
- Minimizing stretching at base with its strong blocks in its center



## HP100 EM / INDUSTRIAL TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure				
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)	
U6242002GTK	14.00-24 24PR	TL	375	1360	186	A2	9500	123	4037	605	
U6242042GTK	14.00-24 32PR	TL	375	1360	190	A2	10600	145	4037	605	
U6251062GTK	15.5-25 16PR	TL	384	1261	175	A2	6900	72	3765	568	
U6252082GTK	17.5-25 20PR	TL	455	1371	181	A2	8250	83	4076	612	
U6254002GTK	20.5-25 24PR	TL	531	1527	189	A2	10300	76	4517	674	
U6255002GTK	23.5-25 24PR	TL	604	1625	196	A2	12500	68	4794	714	
U6256022GTK	26.5-25 28PR	TL	702	1785	203	A2	15500	68	5246	778	
U6256042GTK	26.5-25 32PR	TL	702	1785	206	A2	17000	79	5246	778	
U6257042GTK	29.5-25 32PR	TL	758	1923	210	A2	19000	72	5637	833	

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life



## GD90 EM / INDUSTRIAL TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure				
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)	
U6241062GTK	13.00-24 16PR	TL	335	1280	151	A8	3450	58	3811	573	
U6242062GTK	14.00-24 16PR	TL	382	1354	153	A8	3650	54	4020	603	



- Strong structure
- Increased tread depth and tread pattern providing optimum traction in muddy fields



## GD92

### EM / INDUSTRIAL TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6244062GTK	16.00-24 16PR	TL	432	1493	160	A8	4500	47	4413	658

- Wide shoulder and base width, blocked design
- High traction ability
- Anti-wear future thanks to its pattern appropriate for agricultural, industrial and off-road use
- Consisting durable blocks
- Easy use in soft grounds
- Balanced driving and easy control thanks to wide shoulder and blocks



## GD94

### COMPACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6262052GTK	23.1-26 14PR	TL	587	1580	166	A8	5300	33	4675	698



- Compressing ability for asphalt with its plane surfaced tread pattern
- Stable operation feature thanks to strong frame at sidewalls



## SM40 COMPACTOR TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6201041GTK	9.00-20 12PR	TT	256	1002	157	A2	4125	94	2993	452
U6203061GTK	11.00-20 16PR	TT	290	1040	168	A2	5600	107	3100	467

- High kilometer performance thanks to its special structure
- Comfortable driving thanks to excellent traction
- Maximum traction
- Long wear-life
- Resistance to any kind of impacts



## CK50 FORKLIFT TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6091041GTK	6.00-9 12PR	TT	165	544	121	A5	1450	145	1610	240
U6101041GTK	6.50-10 12PR	TT	181	592	125	A5	1650	110	1754	262
U6121051GTK	7.00-12 14 PR	TT	195	674	134	A5	2120	110	2001	300
U6151051GTK	8.15-15 (28X9-15) 14PR	TT	220	710	146	A5	3000	145	2127	322
U6152071GTK	8.25-15 18PR	TT	240	840	153	A5	3650	145	2495	374



**GTK**

**LCV  
TYRES**





- Strong frame structure and high wear resistance
- Balanced driving thanks to its corrugated pattern
- Increased water discharge thanks to its corrugated gutters
- Increased road bend ability and excellent traction
- Retreadability feature



## KM400 LIGHT TRUCK & MINIBUS TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure				
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Load Capacity Per Axle (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)	
U2141031GTK	6.50-14 10PR	TT	171	647	100/98	L	800/750*	72	1918	287	
U2151031GTK	7.50-15 10PR	TT	235	789	114/112	L	1180/1120*	76	2318	344	
U2161031GTK	6.50-16 10 PR	TT	176	748	108/107	L	1000/975*	73	2216	331	
U2162031GTK	7.00-16 10PR	TT	198	785	113/112	L	1150/1120*	76	2317	345	
U2163041GTK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355	

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



## KM440 LIGHT TRUCK & MINIBUS TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure				
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Load Capacity Per Axle (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)	
U2163141GTK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355	



- Optimum performance in traction and brakes due to special deep back pattern
- Strong frame structure and high wear resistance
- Anti-stone increased water and mud resistance thanks to its surrounding gutters
- Retreadability feature



## TN50 LIGHT TRUCK & MINIBUS TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Load Capacity Per Axle (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U2163241GTK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



## KM420 LIGHT TRUCK & MINIBUS TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions				Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)	Load Index	Speed Symbol	Load Capacity Per Axle (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U2151131GTK	7.50-15 10PR	TT	235	786	114/112	L	1180/1120*	76	2310	342
U2161131GTK	6.50-16 10PR	TT	176	748	108/107	L	1000/975*	73	2216	331
U2162131GTK	7.00-16 10PR	TT	198	785	113/112	L	1150/1120*	76	2317	345
U2163341GTK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355



**GTK**

**MPT  
TYRES**





- Wide base, designed for use at asphalt and off-road (land)
- Self-cleaning tread structure in asphalt use
- Suitable for any weather conditions, excellent traction
- High drift endurance due to diagonal tread structure



## OC20 MILITARY TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6205071GTK	14.00-20 18PR	TT	375	1260	160/157	F	4500/4125*	100	3722	555
U6205081GTK	14.00-20 20PR	TT	375	1260	161/158	F	4625/4250*	108	3690	545

- Pattern feature designed for non-road and highway use
- Excellent maneuverability due to nondirectional use feature



## OC10 MILITARY TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6204041GTK	12.5-20 12PR	TT	325	1040	132	F	2000	51	3100	467



- Military tyre for both off the road and highway application
- More resistance with multilayer carcass body across puncture
- Self-cleaning lug design



## OC16 MILITARY TYRES

Product Code	Tyre Size & Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Symbol	Load & Pressure			
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)	Dynamic Rolling Circumference (mm)	Static Loaded Radius (mm)
U6184021GTK	13.00-18 8PR	TT	354	1125	131	F	1950	43	3324	496







**HEADQUARTER / FACTORY**

Mahmutpaşa Mah. Kanalyolu Cad. No: 129 41140  
Başiskele / Kocaeli TURKEY - Tel: +90 262 349 50 00

**SALES OFFICE / WAREHOUSE**

Yaylacık Mah. Metin Sok. No:1 Başiskele / Kocaeli TURKEY  
Tel: +90 262 349 50 00

**info@gtk.com.tr - www.gtktyres.com**