

GTK



PRODUCT CATALOGUE



INDEX

ABOUT US	5
AGRICULTURAL TYRES	8-27
<i>Radial Tractor Tyres</i>	9-11
<i>Front Tractor Tyres</i>	12-14
<i>Rear Tractor Tyres</i>	15-17
<i>Irrigation Tyres</i>	17
<i>Harvester Tyres</i>	18-19
<i>Flotation Tyres</i>	19-24
<i>Implement Tyres</i>	24-27
<i>Forestry Tyres</i>	27
INDUSTRIAL, EM, OTR TYRES	28-35
<i>Radial Em Tyres</i>	29
<i>Em / Industrial Tyres</i>	29-34
<i>Compactor Tyres</i>	34-35
<i>Forklift Tyres</i>	35
LCV TYRES	36-38
<i>Light Truck & Minibus Tyres</i>	37-38
MPT TYRES	39-41
<i>Military Tyres</i>	40-41





GTK



OUR CERTIFICATES



OCCUPATIONAL HEALTH AND
SAFETY MANAGEMENT



ENVIRONMENTAL
MANAGEMENT SYSTEM



QUALITY
MANAGEMENT SYSTEM



INFORMATION SECURITY
MANAGEMENT SYSTEM

ABOUT US

GTK is an agricultural and industrial tyre manufacturer which exports to three continents.

It has been growing rapidly since its establishment, and continues to increase the number of countries to which it exports.

Thanks to the quality and trust policies implemented by GTK, it provides a wide product range with its facilities equipped with high technology.

GTK is proceeding with solid steps in the direction of its mission, and aims to be one of the world's largest tyre manufacturers.

RADIAL TRACTOR TYRES



RS200

RS220

FRONT TRACTOR TYRES



AS10

AS12

AS14

AS16

AS100

REAR TRACTOR TYRES



AS100

AS110

IRRIGATION TYRES



AS120

HARVESTER TYRES



BT48

BT20

AS100

FLOTATION TYRES



TN52

TN50

TN60

TN70

TN80

BT25

BT22



BT20

BT44

BT40

IMPLEMENT TYRES



BT25

BT20

AS100

BT44

BT42

BT70

FORESTRY TYRES



FT80

RADIAL EM TYRES



RI11

EM / INDUSTRIAL TYRES



LD94

BC70

BC80

LD90

LD92

LD96

EM / INDUSTRIAL TYRES



HP100

GD90

GD92

COMPACTOR TYRES



GD94

SM40

FORKLIFT TYRES



CK50

LIGHT TRUCK & MINIBUS TYRES



KM400

KM440

TN50

KM420

MILITARY TYRES



OC20

OC10

OC16

GTK

**AGRICULTURAL
TYRES**



- Comfortable drive due to flexible sidewall structure
- Mud repellent feature with its specially designed tread pattern
- High performance due to deep treads and wide base track



RS200 RADIAL TRACTOR TYRES

			Inflated Unloaded Dimensions				Load & Pressure			
Product Code	Size	TL / TT	Section Width	Overall Diameter	Load Index	Speed Index	Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
65 SERIES			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
R6524440GTK	440/65 R24	TL	445	1185	128/131	D/A8	1800/1950	35	3542	535
R6524480GTK	480/65 R24	TL	480	1235	133/136	D/A8	2060/2240	35	3683	555
R6524540GTK	540/65 R24	TL	550	1320	146/149	D/A8	3000/3250	34	3924	589
R6526750GTK	750/65 R26	TL	755	1640	166/163	A8/B	5300/4875	34	4844	722
R6528440GTK	440/65 R28	TL	445	1285	131/134	D/A8	1950/2120	35	3857	585
R6528480GTK	480/65 R28	TL	480	1337	142/145	D/A8	2650/2900	35	4004	606
R6528540GTK	540/65 R28	TL	550	1420	149/152	D/A8	3250/3550	35	4238	639
R6528600GTK	600/65 R28	TL	591	1491	154/157	D/A8	3750/4125	34	4439	668
R6530540GTK	540/65 R30	TL	550	1470	150/153	D/A8	3350/3650	34	4396	664
R6532800GTK	800/65 R32	TL	800	1858	178/175	A8/B	7500/6900	46	5509	824
R6534540GTK	540/65 R34	TL	550	1575	152/155	D/A8	3550/3875	34	4725	716
R6538540GTK	540/65 R38	TL	550	1675	153/156	D/A8	3650/4000	34	5039	767
R6538600GTK	600/65 R38	TL	595	1750	159/162	D/A8	4375/4750	35	5251	797
R6538650GTK	650/65 R38	TL	650	1820	163/166	D/A8	4875/5300	34	5449	825
R6542650GTK	650/65 R42	TL	650	1913	165/168	D/A8	5150/5600	34	5744	872
70 SERIES										
R7016240GTK	240/70 R16	TL	245	745	104/104	A8/B	900/900	34	2234	339
R7016260GTK	260/70 R16	TL	260	770	109/109	A8/B	1030/1030	34	2305	349
R7016280GTK	280/70 R16	TL	282	798	112/112	A8/B	1120/1120	34	2384	360
R7018280GTK	280/70 R18	TL	282	849	114/114	A8/B	1180/1180	34	2544	385
R7020260GTK	260/70 R20	TL	260	875	113/113	A8/B	1150/1150	34	2634	401
R7020280GTK	280/70 R20	TL	282	900	116/116	A8/B	1250/1250	34	2704	411
R7020300GTK	300/70 R20	TL	295	952	120/117	A8/B	1400/1285	34	2851	432
R7020320GTK	320/70 R20	TL	319	982	113/113	A8/B	1150/1150	23	2936	444
R7020360GTK	360/70 R20	TL	357	1042	129/129	A8/B	1850/1850	34	3106	468
R7020380GTK	380/70 R20	TL	380	1082	122/122	A8/B	1500/1500	23	3219	484
R7024320GTK	320/70 R24	TL	319	1095	116/116	A8/B	1250/1250	23	3288	499
R7024360GTK	360/70 R24	TL	357	1152	122/122	A8/B	1500/1500	23	3449	522
R7024380GTK	380/70 R24	TL	380	1190	125/125	A8/B	1650/1650	23	3556	537
R7024420GTK	420/70 R24	TL	418	1248	130/130	A8/B	1900/1900	23	3720	560
R7024460GTK	460/70 R24	TL	460	1260	152/149	A8/B	3550/3250	23	3754	565
R7024480GTK	480/70 R24	TL	480	1320	138/135	A8/B	2360/2180	23	3924	589
R7026480GTK	480/70 R26	TL	480	1380	139/136	A8/B	2430/2240	23	4109	618
R7028360GTK	360/70 R28	TL	357	1255	125/125	A8/B	1650/1650	23	3772	573
R7028380GTK	380/70 R28	TL	380	1293	127/127	A8/B	1750/1750	23	3879	588
R7028420GTK	420/70 R28	TL	418	1351	133/133	A8/B	2060/2060	23	4043	612
R7028480GTK	480/70 R28	TL	480	1425	140/140	A8/B	2500/2500	23	4253	641
R7030420GTK	420/70 R30	TL	418	1400	134/131	A8/B	2120/1950	23	4198	636
R7030480GTK	480/70 R30	TL	480	1480	141/138	A8/B	2575/2360	23	4424	668
R7030600GTK	600/70 R30	TL	595	1605	158/156	A8/B	4250/4000	34	4777	718
R7034480GTK	480/70 R34	TL	479	1580	143/140	A8/B	2725/2500	23	4739	718
R7034520GTK	520/70 R34	TL	516	1640	148/146	A8/B	3150/3000	23	4908	742
R7038480GTK	480/70 R38	TL	480	1685	145/142	A8/B	2900/2650	23	5067	771
R7038520GTK	520/70 R38	TL	516	1750	150/147	A8/B	3350/3075	23	5251	797
R7038580GTK	580/70 R38	TL	580	1830	155/152	A8/B	3875/3550	23	5477	829
R7038710GTK	710/70 R38	TL	720	1965	171/174	D/A8	6150/6700	34	5859	883
R7042710GTK	710/70 R42	TL	720	2061	173/176	D/A8	6500/7100	34	6162	931

RS200

RADIAL TRACTOR TYRES

			Inflated Unloaded Dimensions				Load & Pressure			
Product Code	Size	TL / TT	Section Width	Overall Diameter	Load Index	Speed Index	Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)		
80 SERIES										
R8042480GTK	480/80 R42	TL	485	1845	151/148	A8/B	3450/3150	23	5552	845
R8046480GTK	480/80 R46	TL	485	1945	164/164	A8/B	5000/5000	46	5866	895
85 SERIES										
R8520280GTK	280/85 R20 (11.2 R20)	TL	282	984	112/109	A8/B	1120/1030	23	2942	444
R8520320GTK	320/85 R20 (12.4 R20)	TL	319	1052	119/116	A8/B	1360/1250	23	3134	472
R8524280GTK	280/85 R24 (11.2 R24)	TL	282	1086	115/112	A8/B	1215/1120	23	3262	495
R8524320GTK	320/85 R24 (12.4 R24)	TL	319	1154	122/119	A8/B	1500/1360	23	3454	523
R8524340GTK	340/85 R24 (13.6 R24)	TL	343	1188	125/122	A8/B	1650/1500	23	3551	536
R8524380GTK	380/85 R24 (14.9 R24)	TL	380	1256	131/128	A8/B	1950/1800	23	3743	563
R8524420GTK	420/85 R24 (16.9 R24)	TL	418	1324	137/134	A8/B	2300/2060	23	3935	591
R8528280GTK	280/85 R28 (11.2 R28)	TL	282	1187	118/115	A8/B	1320/1215	23	3580	546
R8528320GTK	320/85 R28 (12.4 R28)	TL	320	1255	124/121	A8/B	1600/1450	23	3772	573
R8528340GTK	340/85 R28 (13.6 R28)	TL	343	1289	127/124	A8/B	1750/1600	23	3868	587
R8528380GTK	380/85 R28 (14.9 R28)	TL	380	1357	133/130	A8/B	2060/1900	23	4060	614
R8528420GTK	420/85 R28 (16.9 R28)	TL	418	1425	139/136	A8/B	2430/2240	23	4253	641
R8530380GTK	380/85 R30 (14.9 R30)	TL	380	1408	135/132	A8/B	2180/2000	23	4220	639
R8530420GTK	420/85 R30 (16.9 R30)	TL	418	1476	140/137	A8/B	2500/2300	23	4413	667
R8530460GTK	460/85 R30 (18.4 R30)	TL	455	1544	145/142	A8/B	2900/2650	23	4605	694
R8532320GTK	320/85 R32 (12.4 R32)	TL	320	1365	126/126	A8/B	1700/1700	34	4115	627
R8534420GTK	420/85 R34 (16.9 R34)	TL	418	1578	142/139	A8/B	2650/2430	23	4733	718
R8534460GTK	460/85 R34 (18.4 R34)	TL	455	1646	147/144	A8/B	3075/2800	23	4925	745
R8536320GTK	320/85 R36 (12.4 R36)	TL	320	1465	128/125	A8/B	1800/1650	23	4429	677
R8536340GTK	340/85 R36 (13.6 R36)	TL	343	1495	132/129	A8/B	2000/1850	23	4514	689
R8538320GTK	320/85 R38 (12.4 R38)	TL	320	1515	143/143	A8/B	2725/2725	52	4587	703
R8538340GTK	340/85 R38 (13.6 R38)	TL	343	1545	133/130	A8/B	2060/1900	23	4672	715
R8538380GTK	380/85 R38 (14.9 R38)	TL	380	1611	139/136	A8/B	2430/2240	23	4858	741
R8538420GTK	420/85 R38 (16.9 R38)	TL	418	1679	144/141	A8/B	2800/2575	23	5050	768
R8538460GTK	460/85 R38 (18.4 R38)	TL	455	1747	149/146	A8/B	3250/3000	23	5243	795
R8538520GTK	520/85 R38 (20.8 R38)	TL	516	1849	155/152	A8/B	3875/3550	23	5531	836
R8538650GTK	650/85 R38	TL	650	2071	173/176	D/A8	6500/7100	34	6159	925
R8542520GTK	520/85 R42 (20.8 R42)	TL	516	1955	157/157	A8/B	4125/4125	23	5863	889
R8546340GTK	340/85 R46 (13.6 R46)	TL	345	1756	150/151	D/A8	3350/3450	52	5332	819
R8548340GTK	340/85 R48 (13.6 R48)	TL	343	1800	151/152	D/A8	3450/3550	58	5472	842
90 SERIES										
R9046320GTK	320/90 R46	TL	320	1750	146/146	A8/B	3000/3000	46	5315	817
R9046380GTK	380/90 R46	TL	380	1860	159/162	D/A8	4375/4750	58	5626	861
R9050320GTK	320/90 R50	TL	320	1850	150/150	A8/B	3350/3350	52	5630	867
R9054320GTK	320/90 R54	TL	320	1950	155/155	A8/B	3875/3875	58	5944	917
95 SERIES										
R9520GTK	9.5 R20	TL	241	938	108/105	A8/B	1000/925	23	2812	426
R9532210GTK	210/95 R32	TL	215	1215	114/114	A8/B	1180/1180	34	3691	567
R9532230GTK	230/95 R32	TL	230	1255	128/128	A8/B	1800/1800	58	3804	583
R9532270GTK	270/95 R32	TL	275	1330	136/136	A8/B	2240/2240	58	4016	613
R9536210GTK	210/95 R36	TL	215	1320	118/118	A8/B	1320/1320	34	4019	619
R9536230GTK	230/95 R36	TL	230	1355	130/130	A8/B	1900/1900	58	4118	633
R9536270GTK	270/95 R36	TL	275	1435	139/139	A8/B	2430/2430	58	4345	665
R9538270GTK	270/95 R38	TL	275	1485	140/140	A8/B	2500/2500	58	4502	691
R9542230GTK	230/95 R42	TL	230	1505	133/136	D/A8	2060/2240	58	4590	709
R9544210GTK	210/95 R44	TL	215	1520	120/120	A8/B	1400/1400	34	4649	720
R9544230GTK	230/95 R44	TL	230	1560	132/132	A8/B	2000/2000	58	4762	736
R9544270GTK	270/95 R44	TL	275	1635	142/142	A8/B	2650/2650	58	4974	766
R9546270GTK	270/95 R46	TL	275	1685	143/143	A8/B	2725/2725	58	5131	791
R9546300GTK	300/95 R46	TL	300	1740	148/148	A8/B	3150/3150	58	5287	813
R9548230GTK	230/95 R48	TL	230	1660	136/136	A8/B	2240/2240	58	5077	786
R9548270GTK	270/95 R48	TL	275	1735	144/144	A8/B	2800/2800	58	5289	816
R9552300GTK	300/95 R52	TL	300	1900	156/159	D/A8	4000/4375	58	5787	892
R9554270GTK	270/95 R54	TL	275	1885	146/146	A8/B	3000/3000	58	5761	891

- Comfortable drive due to flexible sidewall structure
- Mud repellent feature with its specially designed tread pattern
- High performance due to deep treads and wide base track



RS220 RADIAL TRACTOR TYRES

			Inflated Unloaded Dimensions				Load & Pressure			
Product Code	Size	TL / TT	Section Width	Overall Diameter	Load Index	Speed Index	Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
70 SERIES			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
R704262011GTK	620/70 R42	TL	625	1935	166/166	A8/B	5300/5300	46	5806	881

75 SERIES

R752662011GTK	620/75 R26	TL	630	1600	166/166	A8/B	5300/5300	46	4731	706
R753062011GTK	620/75 R30	TL	630	1695	163/161	A8/B	4875/4625	35	5032	754
R753265011GTK	650/75 R32	TL	650	1795	172/172	A8/B	6300/6300	46	5331	799



- Tractor front tyre for general use
- Resistance to stone and impacts thanks to strong and robust body
- Smooth driving with gutters at central back
- Prevention of skidding thanks to treads in shoulders
- Long lasting and economic use
- Excellent performance in highway and land



AS10 FRONT TRACTOR TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
3102GTK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
3103GTK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
3202GTK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
3203GTK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
3402GTK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
3403GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363

- Long lasting front tractor tyre
- High maneuverability thanks to nondirectional use feature
- Resistant structure against punctures thanks to increased tread depth



AS12 FRONT TRACTOR TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
3412GTK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
3413GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
3513GTK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
3553GTK	6.50-20 8PR	TT	175	865	102	A6	850	54	2605	397
3603GTK	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417


- Extra strong with its increased tread depth
- Comfortable driving in the field and on the road by pattern design
- Mud-free pattern



AS14 FRONT TRACTOR TYRES

Product Code	Size // Ply Rating	TL/ TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
3132GTK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
3133GTK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
3232GTK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
3233GTK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
3472GTK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
3473GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
3542GTK	6.00-19 6PR	TT	165	814	93	A6	650	48	2453	374

- Suitable to asphalt and land usage
- Excellent maneuverability and nondirectional use
- Resistant structure against punctures
- Straight movement stability in soft land

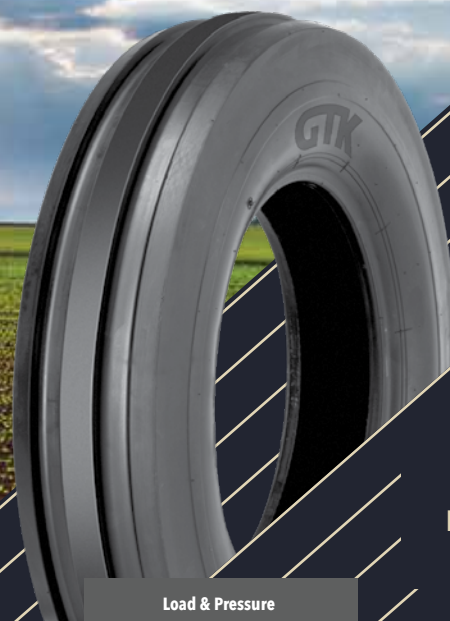

AS16 FRONT TRACTOR TYRES

Product Code	Size // Ply Rating	TL/ TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
3052GTK	5.50-16 6PR	TT	150	710	86	A6	530	54	2135	325
3112GTK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
3113GTK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
3212GTK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
3213GTK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
3432GTK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
3433GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
3463GTK	9.00-16 8PR	TT	234	855	111	A6	1090	45	2545	383
3483GTK	10.00-16 8PR	TT	274	895	115	A6	1215	41	2658	399
3493GTK	11.00-16 8PR	TT	315	965	118	A6	1320	36	2856	427
3503GTK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100 FRONT TRACTOR TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
3003GTK	7.50-15 8PR	TT	205	780	99	A6	775	52	2325	350
3122GTK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
3123GTK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
3222GTK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
3223GTK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
3423GTK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
3523GTK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
3623GTK	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417
3652GTK	9.5-20 6PR	TT	241	940	101	A6	825	30	2818	427
3653GTK	9.5-20 8PR	TT	241	940	106	A6	950	35	2817	427
3663GTK	9.5-20 8PR	TL	241	940	106	A6	950	35	2817	427
3673GTK	11.2-20 8PR	TT	285	1005	113	A6	1150	38	3001	453
3683GTK	11.2-20 8PR	TL	285	1005	113	A6	1150	38	3001	453



- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100 REAR TRACTOR TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
5002GTK	8.3-24 6PR	TT	210	1009	105	A6	925	30	3044	465
5003GTK	8.3-24 8PR	TT	210	1009	108	A6	1000	35	3044	465
5102GTK	9.50-24 6PR	TT	241	1050	110	A6	1060	26	3160	481
5103GTK	9.50-24 8PR	TT	241	1050	116	A6	1250	34	3160	481
5112GTK	11.2-24 6PR	TT	284	1105	110	A6	1060	26	3316	503
5113GTK	11.2-24 8PR	TT	284	1105	116	A6	1250	34	3316	503
5115GTK	11.2-24 12PR	TT	284	1105	122	A6	1500	40	3316	503
5122GTK	12.4-24 6PR	TT	315	1160	115	A6	1215	24	3471	525
5123GTK	12.4-24 8PR	TT	315	1160	118	A6	1320	29	3471	525
5125GTK	12.4-24 12PR	TT	315	1160	124	A6	1600	35	3471	525
5132GTK	13.6-24 6PR	TT	345	1210	120	A6	1400	22	3613	545
5133GTK	13.6-24 8PR	TT	345	1210	123	A6	1550	28	3613	545
5135GTK	13.6-24 12PR	TT	345	1210	129	A6	1850	34	3613	545
5142GTK	14.9-24 6PR	TT	378	1265	125	A6	1650	20	3768	567
5143GTK	14.9-24 8PR	TT	378	1265	128	A6	1800	26	3768	567
5144GTK	14.9-24 10PR	TT	378	1265	131	A6	1950	30	3768	567
5146GTK	14.9-24 14PR	TT	378	1265	137	A6	2300	38	3768	567
5195GTK	15.5/80-24 12PR	TL	394	1260	157	A6	4125	44	3754	565
5197GTK	15.5/80-24 16PR	TL	394	1260	163	A6	4875	58	3754	565
5053GTK	16.9-24 8PR	TT	429	1335	133	A6	2060	25	3966	595
5054GTK	16.9-24 10PR	TT	429	1335	136	A6	2240	29	3966	595
5056GTK	16.9-24 14PR	TT	429	1335	141	A6	2575	35	3966	595
5184GTK	14.9-26 10PR	TT	378	1315	133	A6	2060	30	3926	592
5186GTK	14.9-26 14PR	TT	378	1315	140	A6	2500	39	3926	592
5154GTK	18.4-26 10PR	TT	467	1461	142	A6	2650	26	4338	650
5157GTK	18.4-26 16PR	TT	467	1461	153	A6	3650	44	4338	650
5202GTK	11.2-28 6PR	TT	284	1205	112	A6	1120	26	3630	553
5203GTK	11.2-28 8PR	TT	284	1205	118	A6	1320	34	3630	553
5212GTK	12.4-28 6PR	TT	315	1260	117	A6	1285	25	3786	575
5213GTK	12.4-28 8PR	TT	315	1260	125	A6	1650	30	3786	575
5222GTK	13.6-28 6PR	TT	345	1310	121	A6	1450	23	3927	595
5223GTK	13.6-28 8PR	TT	345	1310	125	A6	1650	29	3927	595
5232GTK	14.9-28 6PR	TT	378	1365	125	A6	1650	20	4083	617
5233GTK	14.9-28 8PR	TT	378	1365	130	A6	1900	26	4083	617
5236GTK	14.9-28 14PR	TT	378	1365	143	A6	2725	40	4083	617
5253GTK	16.9-28 8PR	TT	429	1435	135	A6	2180	24	4281	645
5254GTK	16.9-28 10PR	TT	429	1435	139	A6	2430	29	4281	645
5256GTK	16.9-28 14PR	TT	429	1435	143	A6	2725	34	4281	645
5303GTK	14.9-30 8PR	TT	378	1415	132	A6	2000	26	4240	642
5304GTK	14.9-30 10PR	TT	378	1415	136	A6	2240	29	4240	642
5313GTK	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670
5314GTK	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670
5316GTK	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
5323GTK	18.4-30 8PR	TT	467	1550	139	A6	2430	20	4622	696

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100 REAR TRACTOR TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
5324GTK	18.4-30 10PR	TT	467	1550	145	A6	2900	26	4622	696
5326GTK	18.4-30 14PR	TT	467	1550	154	A6	3750	40	4622	696
5413GTK	8.3-32 8PR	TT	211	1195	111	A6	1090	46	3634	559
5423GTK	9.5-32 8PR	TT	241	1250	115	A6	1215	39	3790	581
5433GTK	12.4-32 8PR	TT	315	1360	125	A6	1650	32	4101	625
5514GTK	16.9-34 10PR	TT	429	1585	142	A6	2650	29	4753	720
5516GTK	16.9-34 14PR	TT	429	1585	148	A6	3150	37	4753	720
5524GTK	18.4-34 10PR	TT	467	1650	146	A6	3000	26	4937	746
5526GTK	18.4-34 14PR	TT	467	1650	155	A6	3875	40	4937	746
5602GTK	12.4-36 6PR	TT	315	1465	121	A6	1450	24	4429	677
5603GTK	12.4-36 8PR	TT	315	1465	126	A6	1700	29	4429	677
5612GTK	13.6-36 6PR	TT	345	1515	125	A6	1650	23	4571	697
5613GTK	13.6-36 8PR	TT	345	1515	129	A6	1850	29	4571	697
5643GTK	12.4-38 8PR	TT	315	1515	127	A6	1750	29	4587	703
5703GTK	13.6-38 8PR	TT	345	1565	131	A6	1950	29	4728	723
5704GTK	13.6-38 10PR	TT	345	1565	135	A6	2180	33	4728	723
5713GTK	14.00-38 8 PR	TT	345	1565	131	A6	1950	29	4728	723
5714GTK	14.00-38 10PR	TT	345	1565	135	A6	2180	33	4728	723
5724GTK	15.5-38 10PR	TT	394	1570	138	A6	2360	33	4742	725
5725GTK	15.5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725
5734GTK	16.9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771
5736GTK	16.9-38 14PR	TT	429	1685	152	A6	3550	40	5067	771
5744GTK	18.4-38 10PR	TT	467	1750	147	A6	3075	26	5251	797
5746GTK	18.4-38 14PR	TT	467	1750	154	A6	3750	36	5251	797

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS110 REAR TRACTOR TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
5333GTK	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670
5334GTK	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670
5335GTK	16.9-30 12PR	TT	429	1485	147	A6	3075	31	4438	670
5336GTK	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
5755GTK	15.5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725
5764GTK	16.9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS120 IRRIGATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
5162GTK	14.9-24 6PR (IRRIGATION)	TL	378	1265	123	A6	1550	20	3768	567
5167GTK	14.9-24 6PR (IRRIGATION)	TT	378	1265	123	A6	1550	20	3768	567
5168GTK	14.9-24 8 PR (IRRIGATION)	TT	378	1265	127	A6	1750	26	3768	567

- Easy rolling resistance with five-rib design
- Suitable for both on and off road application
- Designed for field / road transport and soil tillage operations with implement machinery and trailers
- Good flotation properties with a high load capacity at low tire pressure



BT48 HARVESTER TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4904GTK	9.00-24 10PR	TL	272	1094	124	B	1600	40	3285	499

- Highway, agricultural and off-road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth



BT20 HARVESTER TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4605GTK	10.5/80-18 12PR	TT	274	885	135/123	A8	2180	65	2646	400
4626GTK	12.5/80-18 14PR	TT	308	965	144/131	A8	2800	63	2872	432
4647GTK	13.0/65-18 16PR	TT	336	890	144/131	A8	2800	71	2660	402

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100 HARVESTER TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
5178GTK	23.1-26 18PR	TL	587	1605	162	A6	4750	37	4746	708
6737GTK	18.4-30 16PR	TT	467	1550	158	A6	4250	45	4622	696
5358GTK	23.1-30 18PR	TL	587	1715	160	A6	4500	36	5088	762
5527GTK	18.4-34 16PR	TT	467	1650	159	A6	4375	45	4937	746
5757GTK	20.8-38 16PR	TT	528	1840	162	A6	4750	39	5506	833
5767GTK	20.8-38 16PR	TL	528	1840	162	A6	4750	39	5506	833

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



TN52 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4716GTK	9.00-20 14PR	TT	247	1017	133	A6	2060	81	3035	458

- Resistance to stone and impacts thanks to its improved base
- General purpose trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



TN50 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4425GTK	7.50-16 12PR	TT	214	787	121	A8	1450	72	2353	355
4706GTK	8.25-20 14PR	TT	234	970	133	A6	2060	90	2902	439

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



TN60 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4515GTK	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387
4516GTK	9.00-16 14PR	TT	247	865	128	A6	1800	67	2573	387

- Balanced driving and excellent traction thanks to its special design
- Increased water and mud discharge thanks to surrounded gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



TN70 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4505GTK	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387
4506GTK	9.00-16 14PR	TT	247	865	128	A6	1800	67	2573	387

- Convenient to use in asphalt and land thanks to back pattern
- Durable side wall with strong structure
- Soil holding feature with complex tread structure and channels
- Providing straight location to the ground thanks to back design



TN80 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4445GTK	7.50-16 12PR	TT	214	787	121	A8	1450	72	2353	355

- High load bearing capacity with strong structure and less soil compression with its wide base
- Anti-ground tread design



BT25 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4215GTK	260/70-15.3(10.0/75-15.3)12PR	TL	268	753	126	A8	1700	52	2251	340
4236GTK	300/80-15.3(11.5/80-15.3)14 PR	TL	295	869	141	A8	2575	58	2579	386
4256GTK	12.5/80-15.3 14PR	TL	307	889	142	A8	2650	62	2636	394

- Soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers
- The special tread compound resulting in exceptional cut and strong tread along with excellent wear resistance on all types of terrains



BT22 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4566GTK	500/50-17 14PR	TL	503	932	149	A8	3250	41	2771	416
4568GTK	500/50-17 18PR	TL	503	932	157	A8	4125	70	2771	416

- Highway, agricultural and off-road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth



BT20 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4365GTK	10.0/75-15.3(260/70-15.3) 12PR	TL	264	760	126	A8	1700	68	2271	343
4366GTK	10.0/75-15.3(260/70-15.3) 14PR	TL	264	760	130	A8	1900	80	2271	343
4376GTK	11.5/80-15.3(300/80-15.3) 14PR	TL	290	845	139	A8	2430	69	2511	377
4386GTK	12.5/80-15.3(320/80-15.3) 14PR	TL	307	889	142	A8	2650	62	2636	394
4525GTK	10.5/65-16(265/65-16) 12PR	TT	274	755	126	A8	1700	65	2262	343

- High load bearing capacity with low section off-road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern



BT44 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4335GTK	10.0/75-15.3 12PR	TL	264	760	126	A8	1700	68	2271	343
4346GTK	11.5/80-15.3 14PR	TL	290	845	139	A8	2430	69	2511	377
4356GTK	12.5/80-15.3 14PR	TL	307	889	142	A8	2650	62	2636	394

- Extra strong against stretching thanks to strong frame structure
- Flexibility and deep tread profile



BT40 FLOTATION TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
4397GTK	12.5/80-15.3 16PR	TL	307	889	144	A8	2800	71	2636	394
4418GTK	400/60-15.5 18PR	TL	404	874	151	A8	3450	90	2595	389
4847GTK	550/60-22.5 16PR	TL	543	1244	154	A8	3750	41	3697	555

- Low rolling resistance
- High comfort
- Preventing skidding thanks to its special pattern
- Low soil compact feature thanks to its wide base



BT25 IMPLEMENT TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
1774GTK	10.0/80-12 10PR	TL	261	671	116	A8	1250	57	1993	299

- High tread depth
- Low rolling resistance
- High comfort
- Low soil compact feature thanks to its wide base



BT20 IMPLEMENT TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
1764GTK	10.0/80-12 10PR	TL	264	710	116	A8	1250	57	2103	314

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100 IMPLEMENT TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
1812GTK	6.50/80-15 6PR	TT	163	663	96	A6	710	52	1994	303

- High load bearing capacity with low section off-road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern



BT44 IMPLEMENT TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
1501GTK	4.50-10 4PR	TT	124	490	49	A6	185	30	1465	221
1611GTK	5.00-12 4PR	TT	145	580	62	A6	265	32	1736	262
1732GTK	7.00-12 6PR	TT	200	683	83	A6	487	36	2027	304
1752GTK	6.50/80-13 6PR	TT	170	640	82	A6	475	52	1913	289

- High traction ability thanks to its angle blocks
- Easy movement ability thanks to anti-ground base design
- Preventing clusters in the center and sidewalls during movement of tractor thanks to its open design in center
- Facilitating releasing of muds thanks to windowed blocks



BT42 IMPLEMENT TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
1702GTK	6.50/80-12 6PR	TT	163	588	80	A6	450	52	1758	266

- Proper use in lands and gardens
- Strong and robust structure
- Preventing skidding thanks to its special pattern
- Long lasting and economic use
- Optimum performance with small-type gardening and agriculture vehicles



BT70 IMPLEMENT TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)		
1802GTK	5.00-15 6PR	TT	145	655	76	A6	400	50	1972	300

- Specially designed for forestry application
- Special tread and sidewall compound provides maximum tire life against cut and crack resistance
- Excellent puncture resistance thanks to strong breaker construction shoulder to shoulder,
- Lower lug angle providing excellent grip and self cleaning properties for logging operations
- Tie-bar on the central lugs protects the tire against deep impacts.



NEW PRODUCT

FT80 FORESTRY TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width (mm)	Overall Diameter (mm)			Tyre Load Capacity (Kg)	Tyre Pressure At Max. Load (Psi)		
5507GTK	18.4-26 16PR	TL	467	1461	650	4338	153	A6	3650	44

GTK

**INDUSTRIAL, EM
OTR TYRES**



- High traction and comfort • Longer service life
- Comfortable drive due to flexible sidewall structure • Strong carcass structure
- Resistance to fatigue due to wide shoulder and blocks • Strong tread compound for cut-resistance • High performance due to wide base track
- Mud repellent feature due to specially designed tread pattern



R11 RADIAL EM TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
R702446071GTK	460/70 R24	TL	455	1255	159/159	A8/B	4375/4375	58	3740	563
R8024440GTK	440/80 R24	TL	450	1320	154/154	A8/B	3750/3750	46	3924	589
R8028440GTK	440/80 R28	TL	450	1420	156/156	A8/B	4000/4000	46	4238	639

- Resistance to stone cuts, cracks and breaks
- Long wear-life



LD94 EM / INDUSTRIAL TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6247GTK	10.00-20 16PR	TT	283	1084	146/143	B	3000	109	3225	484
6257GTK	10.00-20 16PR	TL	283	1084	146/143	B	3000	109	3225	484

- Long wear-life
- Cracking / fatigue resistance at treads
- Maximum traction
- Increased sidewall protection



BC70

EM / INDUSTRIAL / TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6015GTK	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352
6036GTK	12-16.5 14PR	TL	320	846	148	A3	3150	90	2524	380

- High traction and comfort
- Designed compatible with scrap operations and recycling process
- Excellent maneuverability at high tonnage due to reinforced shoulder blocks.
- Comfortable drive due to flexible sidewall structure
- Reinforced back structure
- Longer life due to improved back structure
- Wear resistance due to special back combination



BC80

EM / INDUSTRIAL TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6025GTK	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352
6046GTK	12-16.5 14 PR	TL	320	846	148	A3	3150	90	2524	380
6146GTK	12.5/80-18 14PR	TL	305	983	146	A8	3000	62	2923	439

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life



LD90 EM / INDUSTRIAL TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6055GTK	10-16.5 12PR	TL	256	793	138	A3	2360	84	2374	359
6076GTK	12-16.5 14PR	TL	297	858	148	A3	3150	90	2558	385
6115GTK	10.5/80-18 12PR	TL	271	892	135	A8	2180	62	2666	403
6156GTK	12.5/80-18 14PR	TL	285	955	146	A8	3000	62	2844	428
6277GTK	16.0/70-20 16PR	TL	385	1091	166	A2	5300	65	3244	487
6287GTK	15.5/80-24 16PR	TL	412	1269	162	A8	4750	72	3780	569
6377GTK	16.0/70-24 16PR	TL	418	1200	169	A2	5800	65	3584	541
6397GTK	16.9-24 16PR	TL	429	1310	154	A8	3750	46	3895	585
6566GTK	17.5L-24 14PR	TL	475	1277	154	A8	3750	46	3802	572
6816GTK	15.5-25 14PR	TL	400	1286	173	A2	6500	68	3836	578
6516GTK	18.4-26 14PR	TL	467	1425	160	A8	4500	42	4237	636
6616GTK	16.9-28 14PR	TL	429	1410	156	A8	4000	43	4210	635
6957GTK	16.9-30 16PR	TL	418	1466	156	A8	4000	47	4384	663



- High traction and comfort
- Resistance to any kind of impacts with its back structure
- Comfortable drive due to flexible sidewall structure
- Reinforced bead design
- Reinforced sidewall structure
- Excellent maneuverability at high tonnage due to flexible sidewall structure
- Longer life with its reinforced tread pattern
- Strong tread compound against punctures and impacts
- Longer life due to increased tread number and improved tread depth



LD92

EM / INDUSTRIAL TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6136GTK	12.5/80-18 14PR	TL	304	965	146	A8	3000	62	2872	432

- Robust industrial pattern with higher resistance to puncture and tread wear
- Higher traction with wide pattern design at the center lug
- Reinforced bead design



LD96

EM / INDUSTRIAL TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6166GTK	12.5/80-18 14PR	TL	308	987	146	A8	3000	62	2934	441
6176GTK	340/80-18 14PR	TL	343	1001	146	A8	3000	62	2974	446
6187GTK	16.0/70-20 16PR	TL	385	1091	166	A2	5300	65	3244	487
6196GTK	14.5-20 14PR	TL	355	1095	143	D	2725	51	3256	489

- Strong and durable thanks to excellent design
- Its compound resistant to wear, and its blocks resistant to heavy conditions with long maintenance periods
- Minimizing stretching at base with its strong blocks in its center



HP100 EM / INDUSTRIAL TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6761GTK	14.00-24 24PR	TL	375	1360	186	A2	9500	123	4037	605
6765GTK	14.00-24 32PR	TL	375	1360	190	A2	10600	145	4037	605
6419GTK	17.5-25 20PR	TL	455	1371	181	A2	8250	83	4076	612
6431GTK	20.5-25 24PR	TL	531	1527	189	A2	10300	76	4517	674
6451GTK	23.5-25 24PR	TL	604	1625	196	A2	12500	68	4794	714
6473GTK	26.5-25 28PR	TL	702	1785	203	A2	15500	68	5246	778
6475GTK	26.5-25 32PR	TL	702	1785	206	A2	17000	79	5246	778
6495GTK	29.5-25 32PR	TL	758	1923	210	A2	19000	72	5637	833

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life



GD90 EM / INDUSTRIAL TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6337GTK	13.00-24 16PR	TL	335	1280	151	A8	3450	58	3811	573
6357GTK	14.00-24 16PR	TL	382	1354	153	A8	3650	54	4020	603

- Strong structure
- Increased tread depth and tread pattern providing optimum traction in muddy fields



GD92

EM / INDUSTRIAL TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6297GTK	16.00-24 16PR	TL	432	1493	160	A8	4000	47	4413	658

- Wide shoulder and base width, blocked design
- High traction ability
- Anti-wear future thanks to its pattern appropriate for agricultural, industrial and off-road use
- Consisting durable blocks
- Easy use in soft grounds
- Balanced driving and easy control thanks to wide shoulder and blocks



GD94

COMPACTOR TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6536GTK	23.1-26 14PR	TL	587	1580	166	A8	5300	33	4675	698

- Compressing ability for asphalt with its plane surfaced tread pattern
- Stable operation feature thanks to strong frame at sidewalls



SM40 COMPACTOR TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
6225GTK	9.00-20 12PR	TT	256	1002	157	A2	4125	94	2993	452
6262GTK	11.00-20 16PR	TT	290	1040	168	A2	5600	107	3100	467

- High kilometer performance thanks to its special structure
- Comfortable driving thanks to excellent traction
- Maximum traction
- Long wear-life
- Resistance to any kind of impacts



CK50 FORKLIFT TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
9105GTK	6.00-9 12PR	TT	165	544	121	A5	1450	145	1610	240
9205GTK	6.50-10 12PR	TT	181	592	125	A5	1650	110	1754	262
9306GTK	7.00-12 14PR	TT	195	674	134	A5	2120	110	2001	300
9406GTK	8.15-15 (28*9-15) 14PR	TT	220	710	146	A5	3000	145	2127	322
9418GTK	8.25-15 18PR	TT	240	840	153	A5	3650	145	2495	374

GTK

LCV
TYRES



- Strong frame structure and high wear resistance
- Balanced driving thanks to its corrugated pattern
- Increased water discharge thanks to its corrugated gutters
- Increased road bend ability and excellent traction
- Retreadability feature



KM400 LIGHT TRUCK & MINIBUS TYRES

Product Code	Size // Ply Rating	TL/ TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
2144GTK	7.50-15C 10PR	TT	235	789	114/112	L	2360/4480	76	2318	344
2204GTK	6.50-16C 10PR	TT	176	748	108/107	L	2000/3900	73	2216	331
2304GTK	7.00-16C 10PR	TT	198	785	113/112	L	2300/4480	76	2317	345
2405GTK	7.50-16C 12PR	TT	210	810	121/120	L	2900/5600	94	2386	355

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



KM440 LIGHT TRUCK & MINIBUS TYRES

Product Code	Size // Ply Rating	TL/ TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
2415GTK	7.50-16C 12PR	TT	210	810	121/120	L	2900/5600	94	2386	355

- Optimum performance in traction and brakes due to special deep back pattern
- Strong frame structure and high wear resistance
- Anti-stone increased water and mud resistance thanks to its surrounding gutters
- Retreadability feature



TN50

LIGHT TRUCK & MINIBUS TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
2425GTK	7.50-16C 12PR	TT	210	810	121/120	L	2900/5600	94	2386	355

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



KM420

LIGHT TRUCK & MINIBUS TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure			
			Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
2154GTK	7.50-15C 10PR	TT	235	786	114/112	L	2360/4480	76	2310	342
2214GTK	6.50-16C 10PR	TT	176	748	108/107	L	2000/3900	73	2216	331
2314GTK	7.00-16C 10PR	TT	198	785	113/112	L	2300/4480	76	2317	345
2435GTK	7.50-16C 12PR	TT	210	810	121/120	L	2900/5600	94	2386	355

GTK

**MPT
TYRES**



- Wide base, designed for use at asphalt and off-road (land)
- Self-cleaning tread structure in asphalt use
- Suitable for any weather conditions, excellent traction
- High drift endurance due to diagonal tread structure



OC20 MILITARY TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
7748GTK	14.00-20 18PR	TT	375	1260	160/157	F	4500	100	3722	555
7749GTK	14.00-20 20PR	TT	375	1260	161/158	F	4625	108	3722	555

- Pattern feature designed for non-road and highway use
- Excellent maneuverability due to nondirectional use feature



OC10 MILITARY TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)	(mm)	(mm)
7525GTK	12.5-20 12PR	TT	325	1040	132	F	2000	51	3100	467

- Military tyre for both off the road and highway application
- More resistance with multilayer carcass body across puncture
- Self-cleaning lug design



OC16
MILITARY
TYRES

Product Code	Size // Ply Rating	TL / TT	Inflated Unloaded Dimensions		Load Index	Speed Index	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			(mm)	(mm)			(Kg)	(Psi)		
7423GTK	13.00-18 8PR	TT	354	1125	131	F	1950	43	3324	496




Notes

[illegible]

Notes

[illegible]

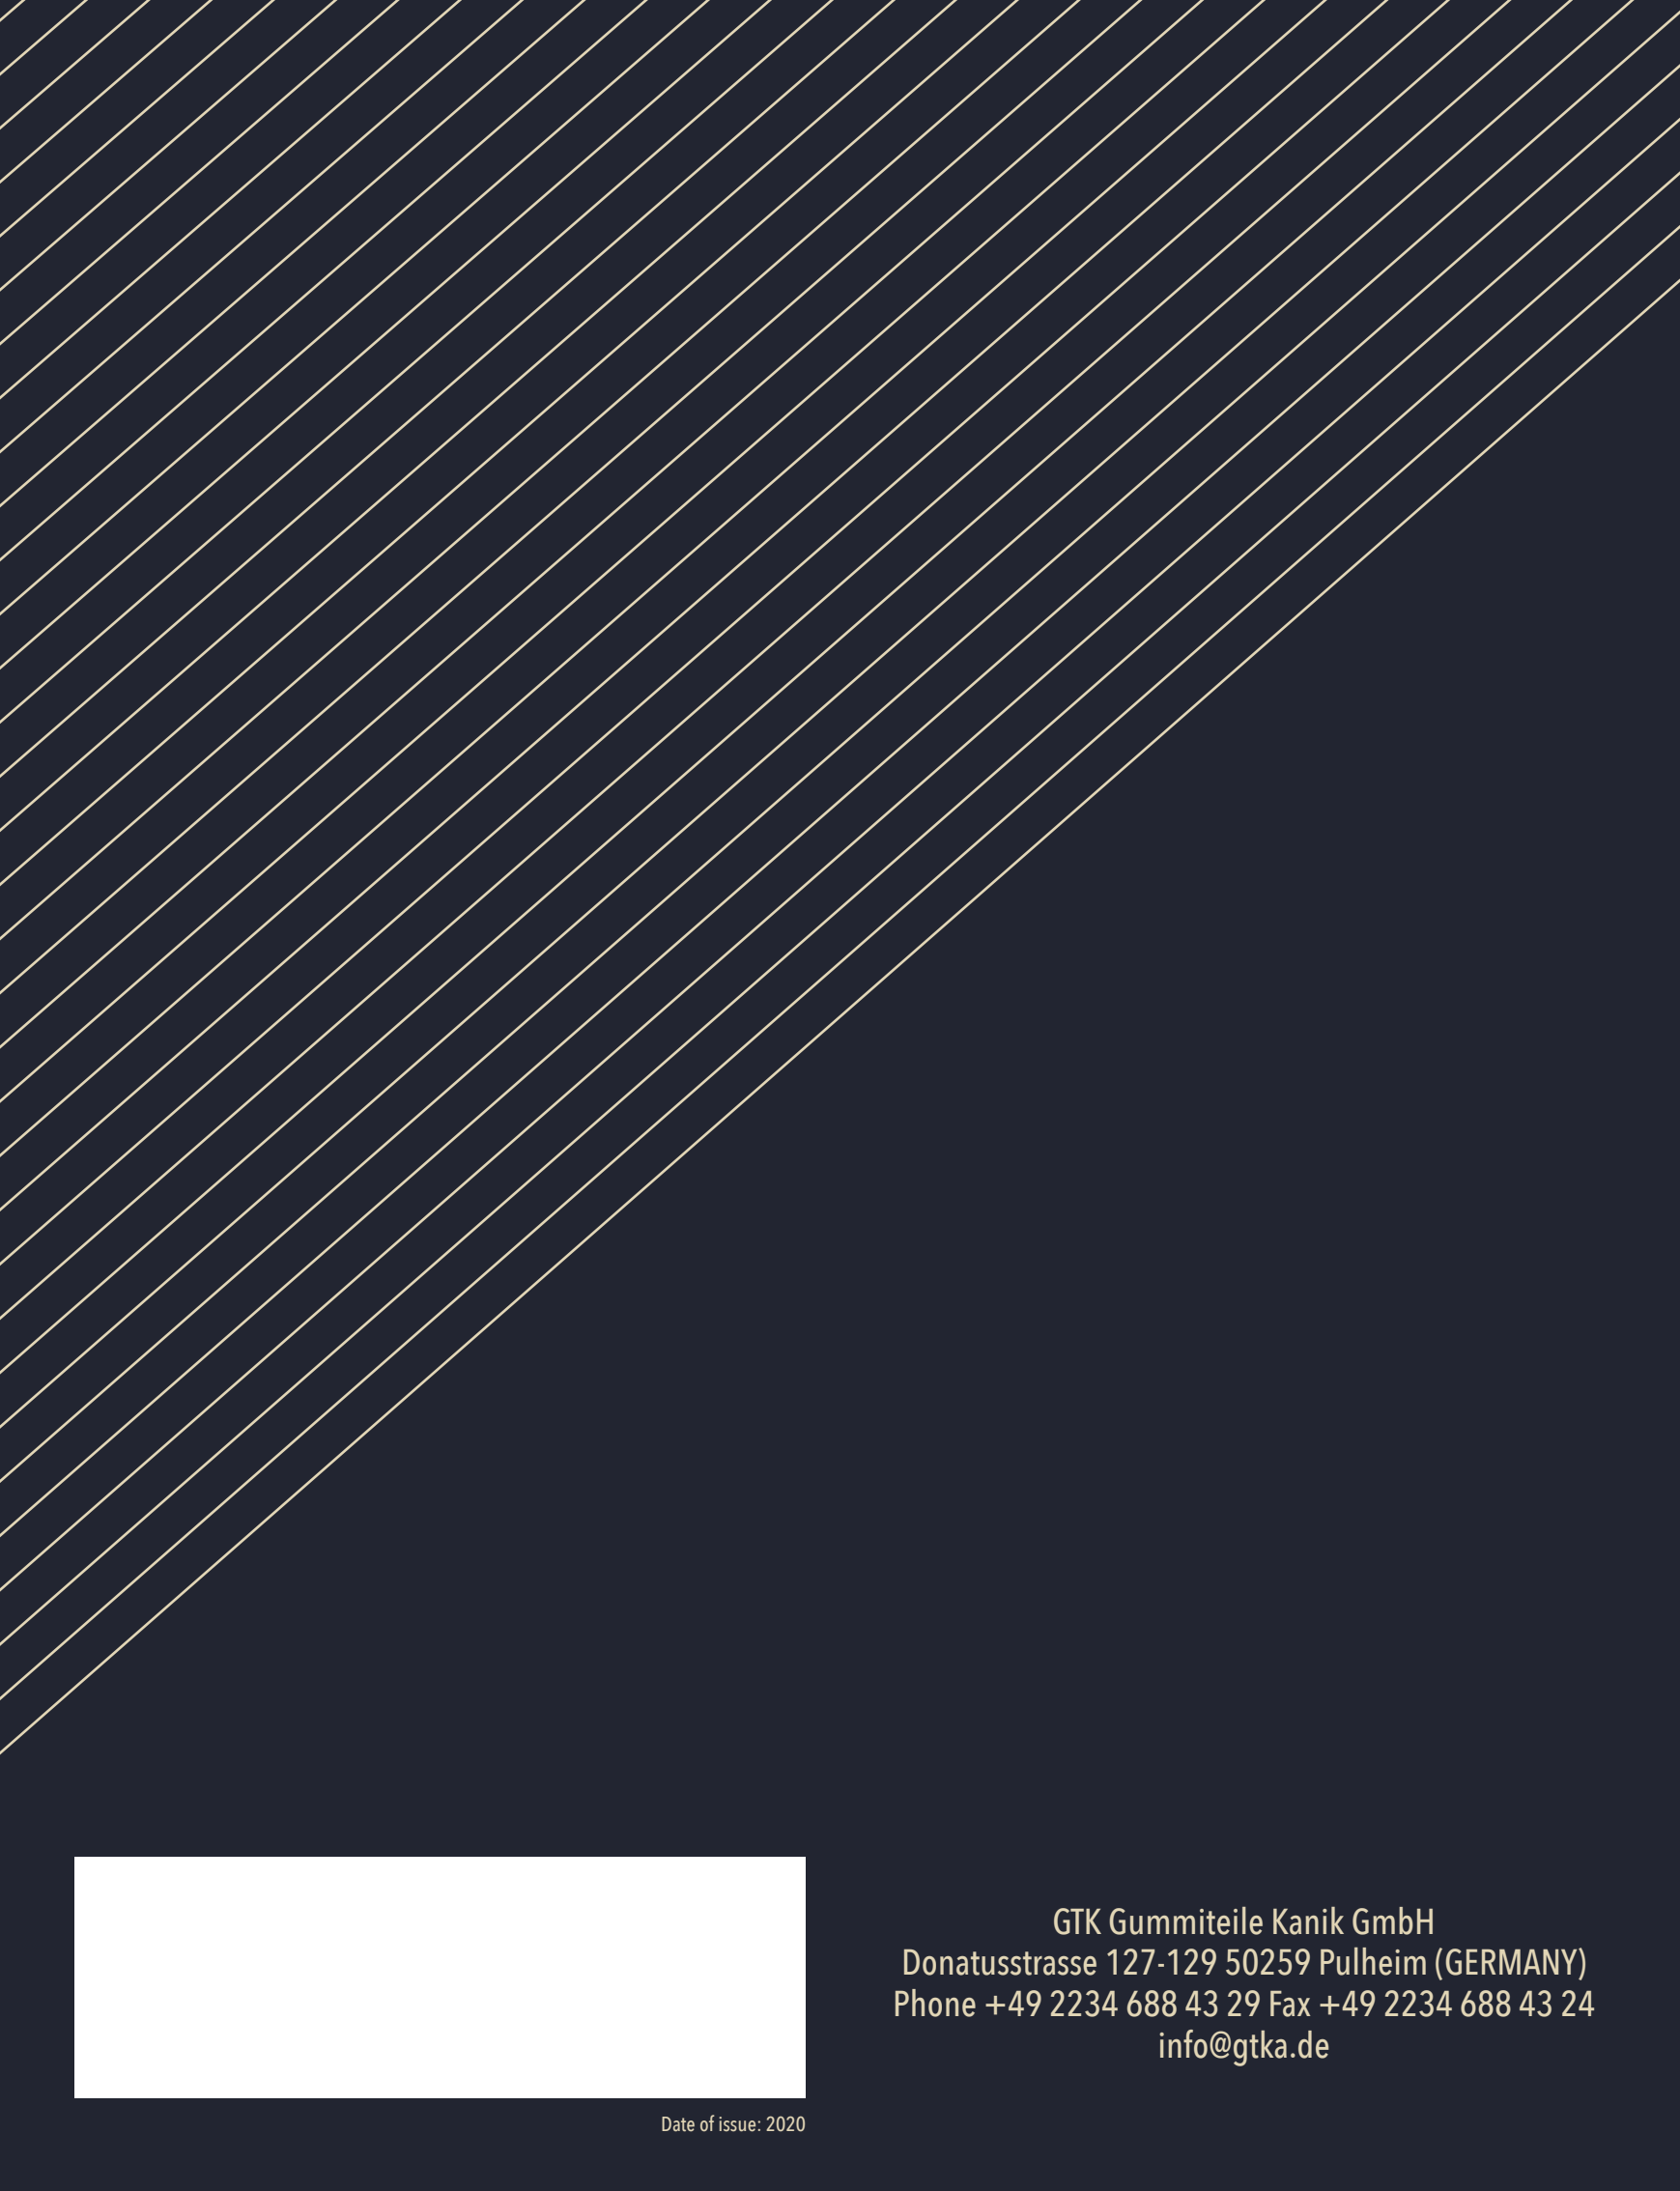

GTK Gummiteile Kanik GmbH
Donatusstrasse 127-129 50259 Pulheim (GERMANY)
Phone +49 2234 688 43 29 Fax +49 2234 688 43 24
info@gtka.de