

# ***PRODUCT CATALOGUE***



# **GTK**



INDEX

|                                        |              |
|----------------------------------------|--------------|
| <b>ABOUT US</b>                        | <b>5</b>     |
| <b>AGRICULTURAL TYRES</b>              | <b>8-37</b>  |
| <i>VF Radial Tractor Tyres</i>         | 9            |
| <i>Radial Tractor Tyres</i>            | 10-14        |
| <i>Radial Flotation Tyres</i>          | 15-17        |
| <i>Front Tractor Tyres</i>             | 20-22        |
| <i>Rear Tractor Tyres</i>              | 23-25        |
| <i>Irrigation Tyres</i>                | 26           |
| <i>Harvester Tyres</i>                 | 27-28        |
| <i>Flotation Tyres</i>                 | 28-33        |
| <i>Implement Tyres</i>                 | 33-36        |
| <i>Forestry Tyres</i>                  | 37           |
| <b>INDUSTRIAL, EM, OTR TYRES</b>       | <b>38-48</b> |
| <i>All Steel Radial Tyres</i>          | 39-40        |
| <i>Radial EM Tyres</i>                 | 40-41        |
| <i>EM / Industrial Tyres</i>           | 41-46        |
| <i>Compactor Tyres</i>                 | 47           |
| <i>Forklift Tyres</i>                  | 48           |
| <i>Solid Forklift Tyres</i>            | 48           |
| <b>LCV TYRES</b>                       | <b>49-51</b> |
| <i>Light Truck &amp; Minibus Tyres</i> | 50-51        |

Trace of Power







## ABOUT US

GTK, operating in 5 continents, has become one of the leading brands in the sector by manufacturing innovative and high performance products in the agricultural and industrial tyre categories.

GTK offers an extensive range of radial agricultural tyres designed for tractors, harvesters, and trailers, delivering dependable performance across various applications. In the conventional agricultural tyre segment, GTK provides a versatile selection tailored for tractors, trailers, harvesters, and garden or field machinery. The industrial tyre portfolio includes radial, all-steel radial, steel-belted radial, and conventional construction tyres. Additionally, GTK’s offerings extend to road construction machinery tyres, pneumatic forklift tyres, light commercial vehicle tyres.

GTK designs high-performance products with innovative R&D approaches, adopts Total Quality Management, manufactures in accordance with national and international standards, and increases its production capacity every year. GTK ensures the quality and reliability of its products in all processes from raw material input to post-shipment control.

GTK efficiently manages order processes and provides fast service in a 360-degree integrated corporate infrastructure with its renewed order management systems. With a customer-oriented approach and expert technical service team, GTK aims to maximize customer satisfaction by providing consultancy and solutions to all requests, complaints and suggestions of its customers.

## OUR CERTIFICATES





PRODUCT RANGE

RADIAL TRACTOR TYRES



RADIAL FLOTATION TYRES



IMPLEMENT TYRES



FORESTRY TYRES



FRONT TRACTOR TYRES



REAR TRACTOR TYRES



ALL STEEL RADIAL TYRES



RADIAL EM TYRES



EM / INDUSTRIAL TYRES



IRRIGATION TYRES



HARVESTER TYRES



FLOTATION TYRES



EM / INDUSTRIAL TYRES



FLOTATION TYRES



COMPACTOR TYRES



FORKLIFT TYRES



SOLID FORKLIFT TYRES



LIGHT TRUCK & MINIBUS TYRES





# AGRICULTURAL TYRES



GTK

- Significantly increased flexibility thanks to its advanced technology.
- Enhanced load-carrying capacity at lower pressure, preventing soil compaction.
- Greater convenience and comfort by removing the need to adjust tyre pressure between roads and fields that helps saving time.



NEW  
PATTERN

**INOFLEX**  
**VF RADIAL TRACTOR**  
**TYRES**

|                  |                   |         |              | Inflated Unloaded Dimensions |                  |            |              | Load & Pressure    |                            |                               |                      |
|------------------|-------------------|---------|--------------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code     | Tyre Size         | TL / TT | Version      | Section Width                | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                  |                   |         |              | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| 70 SERIES        |                   |         |              |                              |                  |            |              |                    |                            |                               |                      |
| *UR7038800402GTK | VF 800/70 R38     | TL      | STEEL BELTED | 804                          | 2050             | 187        | D            | 9750               | 29                         | 5792                          | 888                  |
| 75 SERIES        |                   |         |              |                              |                  |            |              |                    |                            |                               |                      |
| *UR7542710402GTK | VF 710/75 R42     | TL      | STEEL BELTED | 704                          | 2110             | 184        | D            | 9000               | 29                         | 5978                          | 924                  |
| 80 SERIES        |                   |         |              |                              |                  |            |              |                    |                            |                               |                      |
| *UR8050480402GTK | VF 480/80 R50 CFO | TL      | STEEL BELTED | 479                          | 2025             | 179        | D            | 7750               | 52                         | 5929                          | 923                  |
| 90 SERIES        |                   |         |              |                              |                  |            |              |                    |                            |                               |                      |
| *UR9046380402GTK | VF 380/90 R46 CFO | TL      | STEEL BELTED | 387                          | 1840             | 173        | D            | 6500               | 64                         | 5394                          | 841                  |
| *UR9050480402GTK | VF 380/90 R50 CFO | TL      | STEEL BELTED | 387                          | 1940             | 175        | D            | 6900               | 64                         | 5710                          | 891                  |
| *UR9054380402GTK | VF 380/90 R54 CFO | TL      | STEEL BELTED | 387                          | 2045             | 176        | D            | 7100               | 64                         | 6037                          | 943                  |

GTK





- Increased traction both on land and on the road with its renewed pattern and double-angle tread structure
- Comfortable driving both in the field and on the road
- Extra protection in the tread area against fatigue and cracking thanks to the increased lug block
- Increased productivity with special pattern design
- High resistance against punctures and tears thanks to 3-layers bar structure

| Inflated Unloaded Dimensions |            |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size  | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |            |         |               | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| <b>60 SERIES</b>             |            |         |               |                  |            |              |                    |                            |                               |                      |
| UR6032900302GTK              | 900/60 R32 | TL      | 905           | 1870             | 182/185    | D/A8         | 8500/9250          | 58                         | 5543                          | 829                  |
| <b>65 SERIES</b>             |            |         |               |                  |            |              |                    |                            |                               |                      |
| UR6518320302GTK              | 320/65 R18 | TL      | 319           | 873              | 109/109    | A8/B         | 1030/1030          | 23                         | 2612                          | 395                  |
| *UR6518340302GTK             | 340/65 R18 | TL      | 319           | 873              | 113/113    | A8/B         | 1030               | 23                         | 2612                          | 395                  |
| *UR6524420302GTK             | 420/65 R24 | TL      | 418           | 1156             | 126/126    | A8/B         | 1700               | 23                         | 3460                          | 523                  |
| UR6528420302GTK              | 420/65 R28 | TL      | 418           | 1257             | 135        | D            | 2180               | 35                         | 3778                          | 574                  |
| UR6520440302GTK              | 440/65 R20 | TL      | 441           | 1080             | 138/141    | D/A8         | 2360/2580          | 35                         | 3213                          | 483                  |
| UR6524440302GTK              | 440/65 R24 | TL      | 441           | 1182             | 135/138    | D/A8         | 2180/2385          | 35                         | 3534                          | 534                  |
| UR6528440302GTK              | 440/65 R28 | TL      | 445           | 1285             | 131/134    | D/A8         | 1950/2120          | 35                         | 3857                          | 585                  |
| UR6524480302GTK              | 480/65 R24 | TL      | 479           | 1234             | 133/136    | D/A8         | 2060/2255          | 23                         | 3681                          | 555                  |
| UR6528480302GTK              | 480/65 R28 | TL      | 479           | 1335             | 142/145    | D/A8         | 2650/2900          | 35                         | 3998                          | 605                  |
| UR6528540302GTK              | 540/65 R28 | TL      | 550           | 1413             | 149/152    | D/A8         | 3250/3560          | 35                         | 4219                          | 636                  |
| UR6530540302GTK              | 540/65 R30 | TL      | 550           | 1470             | 150/153    | D/A8         | 3350/3650          | 35                         | 4396                          | 664                  |
| UR6534540302GTK              | 540/65 R34 | TL      | 550           | 1575             | 152/155    | D/A8         | 3550/3875          | 35                         | 4725                          | 716                  |
| UR6538540302GTK              | 540/65 R38 | TL      | 550           | 1675             | 153/156    | D/A8         | 3650/4000          | 35                         | 5039                          | 767                  |
| UR6528600302GTK              | 600/65 R28 | TL      | 601           | 1491             | 154/157    | D/A8         | 3750/4105          | 35                         | 4407                          | 657                  |
| UR6538600302GTK              | 600/65 R38 | TL      | 601           | 1745             | 159/162    | D/A8         | 4375/4750          | 35                         | 5237                          | 795                  |
| UR6534650302GTK              | 650/65 R34 | TL      | 601           | 1644             | 161/164    | D/A8         | 4620/4500          | 35                         | 5162                          | 752                  |
| UR6538650302GTK              | 650/65 R38 | TL      | 650           | 1820             | 163/166    | D/A8         | 4875/5300          | 35                         | 5449                          | 825                  |
| UR6542650302GTK              | 650/65 R42 | TL      | 650           | 1913             | 165/168    | D/A8         | 5150/5600          | 35                         | 5744                          | 872                  |



|                  |            |         | Inflated Unloaded Dimensions |                  |            |              | Load & Pressure    |                            |                               |                      |
|------------------|------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code     | Tyre Size  | TL / TT | Section Width                | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                  |            |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| 70 SERIES        |            |         |                              |                  |            |              |                    |                            |                               |                      |
| UR7016200302GTK  | 200/70 R16 | TL      | 197                          | 686              | 94/94      | A8/B         | 670/670            | 35                         | 2154                          | 317                  |
| UR7020260302GTK  | 260/70 R20 | TL      | 258                          | 872              | 113/113    | A8/B         | 1150/1150          | 35                         | 2738                          | 403                  |
| UR7016280302GTK  | 280/70 R16 | TL      | 282                          | 798              | 112/ 112   | A8/B         | 1120/1120          | 35                         | 2506                          | 345                  |
| UR7018280302GTK  | 280/70 R18 | TL      | 282                          | 849              | 114/114    | A8/B         | 1180/1180          | 35                         | 2666                          | 366                  |
| UR7020280302GTK  | 280/70 R20 | TL      | 282                          | 900              | 116/116    | A8/B         | 1250/1250          | 35                         | 2826                          | 387                  |
| UR7020300302GTK  | 300/70 R20 | TL      | 295                          | 952              | 120/117    | A8/B         | 1400/1285          | 35                         | 2989                          | 410                  |
| UR7020320302GTK  | 320/70 R20 | TL      | 319                          | 982              | 113/113    | A8/B         | 2535/2535          | 23                         | 3083                          | 448                  |
| UR7028320302GTK  | 320/70 R28 | TL      | 319                          | 1189             | 119/119    | A8/B         | 1360/1360          | 23                         | 3585                          | 547                  |
| UR7020360302GTK  | 360/70 R20 | TL      | 357                          | 1042             | 129/129    | A8/B         | 1850/1850          | 35                         | 3272                          | 452                  |
| UR7024360302GTK  | 360/70 R24 | TL      | 357                          | 1152             | 122/119    | A8/B         | 1500/1360          | 23                         | 3617                          | 527                  |
| UR7024380302GTK  | 380/70 R24 | TL      | 380                          | 1190             | 125/128    | D/A8         | 1650/1800          | 23                         | 3556                          | 537                  |
| UR7028380302GTK  | 380/70 R28 | TL      | 380                          | 1293             | 127/130    | D/A8         | 1750/1910          | 23                         | 3879                          | 588                  |
| UR7024420302GTK  | 420/70 R24 | TL      | 418                          | 1248             | 130/133    | D/A8         | 1900/2080          | 23                         | 3720                          | 560                  |
| UR7028420302GTK  | 420/70 R28 | TL      | 418                          | 1351             | 133/136    | D/A8         | 2060/2250          | 23                         | 4043                          | 612                  |
| UR7028480302GTK  | 480/70 R28 | TL      | 480                          | 1425             | 140/143    | D/A8         | 2500/2730          | 23                         | 4253                          | 641                  |
| UR7030480302GTK  | 480/70 R30 | TL      | 479                          | 1478             | 141/138    | A8/B         | 2575/2360          | 23                         | 4641                          | 628                  |
| UR7034480302GTK  | 480/70 R34 | TL      | 479                          | 1580             | 143/146    | D/A8         | 2725/2980          | 23                         | 4739                          | 718                  |
| UR7038480302GTK  | 480/70 R38 | TL      | 480                          | 1685             | 145/148    | D/A8         | 2900/3170          | 23                         | 5067                          | 771                  |
| UR7030520302GTK  | 520/70 R30 | TL      | 516                          | 1536             | 145/142    | A8/B         | 2900/2720          | 23                         | 4823                          | 698                  |
| UR7034520302GTK  | 520/70 R34 | TL      | 516                          | 1640             | 148/151    | D/A8         | 3150/3440          | 23                         | 4908                          | 742                  |
| UR7038520302GTK  | 520/70 R38 | TL      | 516                          | 1749             | 150        | D            | 3350               | 23                         | 5223                          | 793                  |
| UR7038580302GTK  | 580/70 R38 | TL      | 577                          | 1827             | 155        | D            | 3875               | 23                         | 5441                          | 823                  |
| UR7042580302GTK  | 580/70 R42 | TL      | 587                          | 1879             | 158/158    | A8/B         | 4250/4250          | 23                         | 5900                          | 812                  |
| UR7030600302GTK  | 600/70 R30 | TL      | 601                          | 1602             | 161/158    | D/A8         | 4620/4250          | 35                         | 5030                          | 725                  |
| UR7034600302GTK  | 600/70 R34 | TL      | 601                          | 1704             | 160/160    | A8/B         | 4500/4500          | 35                         | 5351                          | 776                  |
| UR7046620302GTK  | 620/70 R46 | TL      | 625                          | 2036             | 162/165    | D/A8         | 4750/5200          | 23                         | 6124                          | 931                  |
| *UR7038620302GTK | 620/70 R38 | TL      | 625                          | 1833             | 170        | A8/B         | 6000               | 23                         | 5486                          | 830                  |
| UR7038620302GTK  | 710/70 R38 | TL      | 716                          | 1959             | 171/174    | D/A8         | 6150/6730          | 35                         | 5842                          | 880                  |
| UR7042710302GTK  | 710/70 R42 | TL      | 716                          | 2061             | 173/176    | D/A8         | 6500/7120          | 35                         | 6162                          | 931                  |
| 75 SERIES        |            |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR7538650302GTK | 650/75 R38 | TL      | 645                          | 1941             | 169        | D            | 5800               | 35                         | 5791                          | 873                  |
| *UR7542650302GTK | 650/75 R42 | TL      | 645                          | 2043             | 170        | D            | 6000               | 35                         | 6112                          | 924                  |
| 80 SERIES        |            |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR8036270302GTK | 270/80 R36 | TL      | 275                          | 1346             | 134/134    | A8/B         | 2120               | 58                         | 4093                          | 630                  |
| *UR8046420302GTK | 420/80 R46 | TL      | 418                          | 1840             | 159        | D            | 4375               | 52                         | 5570                          | 853                  |
| 85 SERIES        |            |         |                              |                  |            |              |                    |                            |                               |                      |
| UR8520280302GTK  | 280/85 R20 | TL      | 282                          | 984              | 112/109    | A8/B         | 1120/1030          | 23                         | 3090                          | 421                  |
| UR8528280302GTK  | 280/85 R28 | TL      | 282                          | 1187             | 118/115    | A8/B         | 1320/1215          | 23                         | 3727                          | 551                  |
| UR8524320302GTK  | 320/85 R24 | TL      | 319                          | 1176             | 122/119    | A8/B         | 1360/1500          | 23                         | 3690                          | 539                  |
| UR8534320302GTK  | 320/85 R34 | TL      | 319                          | 1408             | 141/138    | A8/B         | 2570/2360          | 52                         | 5531                          | 836                  |
| UR8524340302GTK  | 340/85 R24 | TL      | 343                          | 1188             | 125/122    | A8/B         | 1650/1500          | 23                         | 3730                          | 542                  |
| UR8524380302GTK  | 380/85 R24 | TL      | 380                          | 1256             | 131/128    | A8/B         | 1950/1800          | 23                         | 3944                          | 570                  |
| UR8528380302GTK  | 380/85 R28 | TL      | 380                          | 1357             | 133/130    | A8/B         | 2600/1900          | 23                         | 4260                          | 620                  |
| UR8534380302GTK  | 380/85 R34 | TL      | 380                          | 1510             | 137/137    | A8/B         | 2300/2300          | 23                         | 4741                          | 697                  |
| *UR8526420302GTK | 420/85 R26 | TL      | 418                          | 1374             | 138        | A8/B         | 2360               | 23                         | 4092                          | 616                  |
| UR8528420302GTK  | 420/85 R28 | TL      | 418                          | 1425             | 139/139    | A8/B         | 2430/2430          | 23                         | 4252                          | 641                  |
| UR8538520302GTK  | 520/85 R38 | TL      | 516                          | 1849             | 155/155    | A8/B         | 3880/3880          | 23                         | 5531                          | 836                  |
| *UR8526460302GTK | 460/85 R26 | TL      | 455                          | 1442             | 143        | A8/B         | 2725               | 23                         | 4285                          | 643                  |
| UR8538460302GTK  | 460/85 R38 | TL      | 455                          | 1747             | 149/146    | A8/B         | 3250/3000          | 23                         | 5486                          | 803                  |
| UR8538520302GTR  | 520/85 R38 | TL      | 516                          | 1849             | 169/169    | A8/B         | 5800/5800          | 52                         | 5531                          | 836                  |
| *UR8542300302GTK | 300/85 R42 | TL      | 295                          | 1577             | 144/144    | A8/B         | 2800               | 58                         | 4794                          | 737                  |
| UR8542520302GTK  | 520/85 R42 | TL      | 516                          | 1951             | 157/157    | A8/B         | 4130/4130          | 23                         | 5851                          | 887                  |
| 90 SERIES        |            |         |                              |                  |            |              |                    |                            |                               |                      |
| UR9042320302GTK  | 320/90 R42 | TL      | 319                          | 1643             | 139/139    | A8/B         | 2430/2430          | 23                         | 5159                          | 696                  |
| UR9030420302GTK  | 420/90 R30 | TL      | 418                          | 1518             | 147/147    | A8/B         | 3080/3080          | 35                         | 4531                          | 683                  |
| 95 SERIES        |            |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR9516210302GTK | 210/95 R16 | TL      | 215                          | 806              | 106/106    | A8/B         | 950                | 35                         | 2407                          | 363                  |
| *UR9518210302GTK | 210/95 R18 | TL      | 215                          | 857              | 108/108    | A8/B         | 1000               | 35                         | 2567                          | 389                  |
| *UR9540230302GTK | 230/95 R40 | TL      | 228                          | 1454             | 122/122    | A8/B         | 1500/1500          | 35                         | 4566                          | 688                  |



- Comfortable drive due to flexible sidewall structure
- Mud repellent feature with its specially designed tread pattern
- High performance due to deep treads and wide base track



| Inflated Unloaded Dimensions |            |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size  | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |            |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| <b>65 SERIES</b>             |            |         |               |                  |            |              |                    |                            |                               |                      |
| UR6516320102GTK              | 320/65 R16 | TL      | 319           | 822              | 117/120    | D/A8         | 1285/1405          | 35                         | 2432                          | 367                  |
| UR6520340102GTK              | 340/65 R20 | TL      | 343           | 950              | 124/127    | D/A8         | 1600/1750          | 35                         | 2817                          | 427                  |
| UR6520420102GTK              | 420/65 R20 | TL      | 418           | 1054             | 135/138    | D/A8         | 2180/2385          | 35                         | 3114                          | 469                  |
| UR6524440102GTK              | 440/65 R24 | TL      | 445           | 1185             | 128/131    | D/A8         | 1800/1950          | 35                         | 3542                          | 535                  |
| UR6528440102GTK              | 440/65 R28 | TL      | 445           | 1285             | 131/134    | D/A8         | 1950/2120          | 35                         | 3857                          | 585                  |
| UR6524480102GTK              | 480/65 R24 | TL      | 480           | 1235             | 133/136    | D/A8         | 2060/2240          | 35                         | 3683                          | 555                  |
| UR6528480102GTK              | 480/65 R28 | TL      | 480           | 1337             | 142/145    | D/A8         | 2650/2900          | 35                         | 4004                          | 606                  |
| UR6524540102GTK              | 540/65 R24 | TL      | 550           | 1320             | 146/149    | D/A8         | 3000/3250          | 35                         | 3924                          | 589                  |
| UR6528540102GTK              | 540/65 R28 | TL      | 550           | 1420             | 149/152    | D/A8         | 3250/3550          | 35                         | 4238                          | 639                  |
| UR6530540102GTK              | 540/65 R30 | TL      | 550           | 1470             | 150/153    | D/A8         | 3350/3650          | 35                         | 4396                          | 664                  |
| UR6534540102GTK              | 540/65 R34 | TL      | 550           | 1575             | 152/155    | D/A8         | 3550/3875          | 35                         | 4725                          | 716                  |
| UR6538540102GTK              | 540/65 R38 | TL      | 550           | 1675             | 153/156    | D/A8         | 3650/4000          | 35                         | 5039                          | 767                  |
| UR6528600102GTK              | 600/65 R28 | TL      | 591           | 1491             | 154/157    | D/A8         | 3750/4125          | 35                         | 4439                          | 668                  |
| UR6530600102GTK              | 600/65 R30 | TL      | 601           | 1542             | 155/158    | D/A8         | 3875/4245          | 35                         | 4546                          | 685                  |
| UR6534600102GTK              | 600/65 R34 | TL      | 601           | 1644             | 157/160    | D/A8         | 4125/4515          | 35                         | 4920                          | 744                  |
| UR6538600102GTK              | 600/65 R38 | TL      | 595           | 1750             | 159/162    | D/A8         | 4375/4750          | 35                         | 5251                          | 797                  |
| UR6538650102GTK              | 650/65 R38 | TL      | 650           | 1820             | 163/166    | D/A8         | 4875/5300          | 35                         | 5449                          | 825                  |
| UR6542650102GTK              | 650/65 R42 | TL      | 650           | 1913             | 165/168    | D/A8         | 5150/5600          | 35                         | 5744                          | 872                  |
| UR6526750102GTK              | 750/65 R26 | TL      | 755           | 1640             | 166/163    | A8/B         | 5300/4875          | 35                         | 4844                          | 722                  |
| UR6532800102GTK              | 800/65 R32 | TL      | 800           | 1858             | 178/175    | A8/B         | 7500/6900          | 46                         | 5509                          | 824                  |
| <b>70 SERIES</b>             |            |         |               |                  |            |              |                    |                            |                               |                      |
| UR7016240102GTK              | 240/70 R16 | TL      | 245           | 745              | 104/104    | A8/B         | 900/900            | 35                         | 2234                          | 339                  |
| UR7016260102GTK              | 260/70 R16 | TL      | 260           | 770              | 109/109    | A8/B         | 1030/1030          | 35                         | 2305                          | 349                  |
| UR7020260102GTK              | 260/70 R20 | TL      | 260           | 875              | 113/113    | A8/B         | 1150/1150          | 35                         | 2634                          | 401                  |
| UR7016280102GTK              | 280/70 R16 | TL      | 282           | 798              | 112/112    | A8/B         | 1120/1120          | 35                         | 2384                          | 360                  |
| UR7018280102GTK              | 280/70 R18 | TL      | 282           | 849              | 114/114    | A8/B         | 1180/1180          | 35                         | 2544                          | 385                  |
| UR7020280102GTK              | 280/70 R20 | TL      | 282           | 900              | 116/116    | A8/B         | 1250/1250          | 35                         | 2704                          | 411                  |
| UR7020300102GTK              | 300/70 R20 | TL      | 295           | 952              | 120/117    | A8/B         | 1400/1285          | 35                         | 2851                          | 432                  |
| UR7020320102GTK              | 320/70 R20 | TL      | 319           | 982              | 113/113    | A8/B         | 1150/1150          | 23                         | 2936                          | 444                  |
| UR7024320102GTK              | 320/70 R24 | TL      | 319           | 1095             | 116/116    | A8/B         | 1250/1250          | 23                         | 3288                          | 499                  |
| UR7020360102GTK              | 360/70 R20 | TL      | 357           | 1042             | 129/129    | A8/B         | 1850/1850          | 35                         | 3106                          | 468                  |
| UR7024360102GTK              | 360/70 R24 | TL      | 357           | 1152             | 122/122    | A8/B         | 1500/1500          | 23                         | 3449                          | 522                  |
| UR7028360102GTK              | 360/70 R28 | TL      | 357           | 1255             | 125/125    | A8/B         | 1650/1650          | 23                         | 3772                          | 573                  |
| UR7020380102GTK              | 380/70 R20 | TL      | 380           | 1082             | 122/122    | A8/B         | 1500/1500          | 23                         | 3219                          | 484                  |
| UR7024380102GTK              | 380/70 R24 | TL      | 380           | 1190             | 125/125    | A8/B         | 1650/1650          | 23                         | 3556                          | 537                  |
| UR7028380102GTK              | 380/70 R28 | TL      | 380           | 1293             | 127/127    | A8/B         | 1750/1750          | 23                         | 3879                          | 588                  |
| UR7024420102GTK              | 420/70 R24 | TL      | 418           | 1248             | 130/130    | A8/B         | 1900/1900          | 23                         | 3720                          | 560                  |
| UR7028420102GTK              | 420/70 R28 | TL      | 418           | 1351             | 133/133    | A8/B         | 2060/2060          | 23                         | 4043                          | 612                  |
| UR7030420102GTK              | 420/70 R30 | TL      | 418           | 1400             | 134/131    | A8/B         | 2120/1950          | 23                         | 4198                          | 636                  |
| UR7024460102GTK              | 460/70 R24 | TL      | 460           | 1260             | 159/159    | A8/B         | 4380/4380          | 46                         | 3754                          | 565                  |
| UR7024480102GTK              | 480/70 R24 | TL      | 480           | 1320             | 138/135    | A8/B         | 2360/2180          | 23                         | 3924                          | 589                  |
| UR7026480102GTK              | 480/70 R26 | TL      | 480           | 1380             | 139/136    | A8/B         | 2430/2240          | 23                         | 4109                          | 618                  |
| UR7028480102GTK              | 480/70 R28 | TL      | 480           | 1425             | 140/140    | A8/B         | 2500/2500          | 23                         | 4253                          | 641                  |
| UR7030480102GTK              | 480/70 R30 | TL      | 480           | 1480             | 141/138    | A8/B         | 2575/2360          | 23                         | 4424                          | 668                  |
| UR7034480102GTK              | 480/70 R34 | TL      | 479           | 1580             | 143/140    | A8/B         | 3250/2500          | 35                         | 4739                          | 718                  |
| UR7038480102GTK              | 480/70 R38 | TL      | 480           | 1685             | 145/142    | A8/B         | 2900/2650          | 23                         | 5067                          | 771                  |
| UR7034520102GTK              | 520/70 R34 | TL      | 516           | 1640             | 148/146    | A8/B         | 3150/3000          | 23                         | 4908                          | 742                  |
| UR7038520102GTK              | 520/70 R38 | TL      | 516           | 1750             | 150/147    | A8/B         | 3350/3075          | 23                         | 5251                          | 797                  |
| UR7038580102GTK              | 580/70 R38 | TL      | 580           | 1830             | 155/152    | A8/B         | 3875/3550          | 23                         | 5477                          | 829                  |
| UR7030600102GTK              | 600/70 R30 | TL      | 595           | 1650             | 158/156    | A8/B         | 4250/4000          | 35                         | 4777                          | 718                  |
| UR7038710102GTK              | 710/70 R38 | TL      | 720           | 1965             | 171/174    | D/A8         | 6150/6700          | 35                         | 5859                          | 883                  |
| UR7042710102GTK              | 710/70 R42 | TL      | 720           | 2061             | 173/176    | D/A8         | 6500/7100          | 35                         | 6162                          | 931                  |

| Inflated Unloaded Dimensions |                                        |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|----------------------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size                              | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| <b>80 SERIES</b>             |                                        |         |               |                  |            |              |                    |                            |                               |                      |
| UR8042480102GTK              | 480/80 R42                             | TL      | 485           | 1845             | 151/148    | A8/B         | 3450/3150          | 23                         | 5552                          | 845                  |
| UR8046480102GTK              | 480/80 R46                             | TL      | 485           | 1945             | 164/164    | A8/B         | 5000/5000          | 46                         | 5866                          | 895                  |
| <b>85 SERIES</b>             |                                        |         |               |                  |            |              |                    |                            |                               |                      |
| UR8524250102GTK              | 250/85 R24 (9.5 R24)                   | TL      | 251           | 1036             | 109/109    | A8/B         | 1030/1030          | 23                         | 3121                          | 475                  |
| UR8528250102GTK              | 250/85 R28 (9.5 R28)                   | TL      | 251           | 1137             | 112/112    | A8/B         | 1120/1120          | 23                         | 3406                          | 516                  |
| UR8520280102GTK              | 280/85 R20 (11.2 R20)                  | TL      | 282           | 984              | 112/109    | A8/B         | 1130/1030          | 23                         | 2942                          | 444                  |
| UR8524280102GTK              | 280/85 R24 (11.2 R24)                  | TL      | 282           | 1086             | 115/112    | A8/B         | 1215/1120          | 23                         | 3262                          | 495                  |
| UR8528280102GTK              | 280/85 R28 (11.2 R28)                  | TL      | 282           | 1187             | 118/115    | A8/B         | 1320/1215          | 23                         | 3580                          | 546                  |
| UR8520320102GTK              | 320/85 R20 (12.4 R20)                  | TL      | 319           | 1052             | 119/116    | A8/B         | 1360/1250          | 23                         | 3134                          | 472                  |
| UR8524320102GTK              | 320/85 R24 (12.4 R24)                  | TL      | 319           | 1154             | 122/119    | A8/B         | 1500/1360          | 23                         | 3454                          | 523                  |
| UR8528320102GTK              | 320/85 R28 (12.4 R28)                  | TL      | 320           | 1255             | 124/121    | A8/B         | 1600/1450          | 23                         | 3772                          | 573                  |
| UR8532320102GTK              | 320/85 R32 (12.4 R32)                  | TL      | 320           | 1365             | 126/126    | A8/B         | 1700/1700          | 35                         | 3883                          | 554                  |
| UR8536320102GTK              | 320/85 R36 (12.4 R36)                  | TL      | 320           | 1465             | 128/125    | A8/B         | 1800/1650          | 23                         | 4429                          | 677                  |
| UR8538320102GTK              | 320/85 R38 (12.4 R38)                  | TL      | 320           | 1515             | 143/143    | A8/B         | 2725/2725          | 52                         | 4587                          | 703                  |
| UR8524340102GTK              | 340/85 R24 (13.6 R24)                  | TL      | 343           | 1188             | 125/122    | A8/B         | 1650/1500          | 23                         | 3551                          | 536                  |
| UR8528340102GTK              | 340/85 R28 (13.6 R28)                  | TL      | 343           | 1289             | 127/124    | A8/B         | 1750/1600          | 23                         | 3868                          | 587                  |
| UR8536340102GTK              | 340/85 R36 (13.6 R36)                  | TL      | 343           | 1495             | 132/129    | A8/B         | 2000/1850          | 23                         | 4514                          | 689                  |
| UR8538340102GTK              | 340/85 R38 (13.6 R38)                  | TL      | 343           | 1545             | 133/130    | A8/B         | 2060/1900          | 23                         | 4672                          | 715                  |
| UR8546340102GTK              | 340/85 R46 (13.6 R46)                  | TL      | 345           | 1756             | 150/153    | D/A8         | 3350/3650          | 52                         | 5332                          | 819                  |
| UR8548340102GTK              | 340/85 R48 (13.6 R48)                  | TL      | 343           | 1800             | 151/154    | D/A8         | 3450/3750          | 58                         | 5472                          | 842                  |
| UR8524380102GTK              | 380/85 R24 (14.9 R24)                  | TL      | 380           | 1256             | 131/128    | A8/B         | 1950/1850          | 23                         | 3743                          | 563                  |
| UR8528380102GTK              | 380/85 R28 (14.9 R28)                  | TL      | 380           | 1357             | 133/130    | A8/B         | 2060/1900          | 23                         | 4060                          | 614                  |
| UR8530380102GTK              | 380/85 R30 (14.9 R30)                  | TL      | 380           | 1408             | 135/132    | A8/B         | 2180/2000          | 23                         | 4220                          | 639                  |
| UR8538380102GTK              | 380/85 R38 (14.9 R38)                  | TL      | 380           | 1611             | 139/136    | A8/B         | 2430/2220          | 23                         | 4858                          | 741                  |
| UR8524420102GTK              | 420/85 R24 (16.9 R24)                  | TL      | 418           | 1324             | 137/134    | A8/B         | 2300/2120          | 23                         | 3935                          | 591                  |
| UR8528420102GTK              | 420/85 R28 (16.9 R28)                  | TL      | 418           | 1425             | 139/136    | A8/B         | 2430/2240          | 23                         | 4253                          | 641                  |
| UR8530420102GTK              | 420/85 R30 (16.9 R30)                  | TL      | 418           | 1476             | 140/137    | A8/B         | 2500/2300          | 23                         | 4413                          | 667                  |
| UR8534420102GTK              | 420/85 R34 (16.9 R34)                  | TL      | 418           | 1578             | 142/138    | A8/B         | 2650/2360          | 23                         | 4733                          | 718                  |
| UR8538420102GTK              | 420/85 R38 (16.9 R38)                  | TL      | 418           | 1679             | 144/141    | A8/B         | 2800/2575          | 23                         | 5050                          | 768                  |
| UR8530460102GTK              | 460/85 R30 (18.4 R30)                  | TL      | 455           | 1544             | 145/142    | A8/B         | 2900/2650          | 23                         | 4605                          | 694                  |
| UR8534460102GTK              | 460/85 R34 (18.4 R34)                  | TL      | 455           | 1646             | 147/144    | A8/B         | 3075/2800          | 23                         | 4925                          | 745                  |
| UR8538460102GTK              | 460/85 R38 (18.4 R38)                  | TL      | 455           | 1747             | 149/146    | A8/B         | 3250/3000          | 23                         | 5243                          | 795                  |
| UR8538460102GTR              | 460/85 R38<br>REINFORCED FOR HARVESTER | TL      | 455           | 1747             | 149/146    | A8/B         | 3250/3000          | 23                         | 5243                          | 795                  |
| UR8538520102GTK              | 520/85 R38 (20.8 R38)                  | TL      | 516           | 1849             | 155/152    | A8/B         | 3875/3550          | 23                         | 5531                          | 836                  |
| UR8538520102GTR              | 520/85 R38<br>REINFORCED FOR HARVESTER | TL      | 516           | 1849             | 169        | A8           | 5800               | 23                         | 5531                          | 836                  |
| UR8542520102GTK              | 520/85 R42 (20.8 R42)                  | TL      | 516           | 1955             | 157/157    | A8/B         | 4125/4125          | 23                         | 5863                          | 889                  |
| UR8542520102GTR              | 520/85 R42<br>CHO                      | TL      | 516           | 1955             | 167        | A8           | 5450               | 23                         | 5863                          | 889                  |
| UR8538650102GTK              | 650/85 R38                             | TL      | 650           | 2071             | 173/176    | D/A8         | 6500/7100          | 35                         | 6159                          | 925                  |

90 SERIES

|                 |            |    |     |      |         |      |           |    |      |     |
|-----------------|------------|----|-----|------|---------|------|-----------|----|------|-----|
| UR9046320102GTK | 320/90 R46 | TL | 320 | 1750 | 145/148 | D/A8 | 2900/3150 | 46 | 5315 | 817 |
| UR9050320102GTK | 320/90 R50 | TL | 320 | 1850 | 150/150 | A8/B | 3350/3350 | 52 | 5630 | 867 |
| UR9054320102GTK | 320/90 R54 | TL | 320 | 1950 | 155/155 | A8/B | 3875/3875 | 58 | 5944 | 917 |
| UR9046380102GTK | 380/90 R46 | TL | 380 | 1860 | 159/162 | D/A8 | 4375/4750 | 58 | 5626 | 861 |

95 SERIES

|                 |            |    |     |      |         |      |           |    |      |     |
|-----------------|------------|----|-----|------|---------|------|-----------|----|------|-----|
| UR0020095102GTK | 9.5 R20    | TL | 241 | 938  | 108/105 | A8/B | 1000/925  | 23 | 2652 | 375 |
| UR9532210102GTK | 210/95 R32 | TL | 215 | 1215 | 116/120 | D/A8 | 1250/1400 | 35 | 3691 | 567 |
| UR9536210102GTK | 210/95 R36 | TL | 215 | 1320 | 118/121 | D/A8 | 1800/1950 | 58 | 4019 | 619 |
| UR9544210102GTK | 210/95 R44 | TL | 215 | 1520 | 126/129 | D/A8 | 1700/1850 | 35 | 4649 | 720 |
| UR9532230102GTK | 230/95 R32 | TL | 230 | 1255 | 128/131 | D/A8 | 1800/1950 | 58 | 3804 | 583 |
| UR9536230102GTK | 230/95 R36 | TL | 230 | 1355 | 130/133 | D/A8 | 1900/2060 | 58 | 4118 | 633 |
| UR9542230102GTK | 230/95 R42 | TL | 230 | 1505 | 133/136 | D/A8 | 2060/2240 | 58 | 4590 | 709 |
| UR9544230102GTK | 230/95 R44 | TL | 230 | 1560 | 134/137 | D/A8 | 2120/2300 | 58 | 4762 | 736 |
| UR9548230102GTK | 230/95 R48 | TL | 230 | 1660 | 136/139 | D/A8 | 2240/2430 | 58 | 5077 | 786 |
| UR9532270102GTK | 270/95 R32 | TL | 275 | 1330 | 133/136 | D/A8 | 2060/2240 | 58 | 4016 | 613 |
| UR9536270102GTK | 270/95 R36 | TL | 275 | 1435 | 136/139 | D/A8 | 2240/2430 | 58 | 4329 | 665 |
| UR9538270102GTK | 270/95 R38 | TL | 275 | 1485 | 137/140 | D/A8 | 2300/2500 | 58 | 4502 | 691 |
| UR9542270102GTK | 270/95 R42 | TL | 275 | 1581 | 141/138 | A8/B | 2575/2360 | 58 | 4788 | 737 |
| UR9544270102GTK | 270/95 R44 | TL | 275 | 1635 | 142/145 | D/A8 | 2650/2900 | 58 | 4974 | 766 |
| UR9546270102GTK | 270/95 R46 | TL | 275 | 1685 | 141/144 | D/A8 | 2575/2800 | 58 | 5131 | 791 |
| UR9548270102GTK | 270/95 R48 | TL | 275 | 1735 | 142/145 | D/A8 | 2650/2900 | 58 | 5289 | 816 |
| UR9554270102GTK | 270/95 R54 | TL | 275 | 1885 | 146/149 | D/A8 | 3000/3250 | 58 | 5761 | 891 |
| UR9546300102GTK | 300/95 R46 | TL | 300 | 1740 | 148/151 | D/A8 | 3150/3450 | 58 | 5287 | 813 |
| UR9552300102GTK | 300/95 R52 | TL | 300 | 1900 | 156/159 | D/A8 | 4000/4375 | 58 | 5787 | 892 |



GTK

- Comfortable drive due to flexible sidewall structure
- Mud repellent feature with its specially designed tread pattern
- High performance due to deep treads and wide base track



RS220  
RADIAL TRACTOR  
TYRES

| Product Code     | Tyre Size  | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            |                               |                      |
|------------------|------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|                  |            |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                  |            |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| <b>70 SERIES</b> |            |         |                              |                  |            |              |                    |                            |                               |                      |
| UR7042620112GTK  | 620/70 R42 | TL      | 625                          | 1935             | 166/166    | A8/B         | 5300/5300          | 35                         | 5806                          | 881                  |
| <b>75 SERIES</b> |            |         |                              |                  |            |              |                    |                            |                               |                      |
| UR7526620112GTK  | 620/75 R26 | TL      | 630                          | 1600             | 166/166    | A8/B         | 5300/5300          | 46                         | 4731                          | 706                  |
| UR7530620112GTK  | 620/75 R30 | TL      | 630                          | 1695             | 163/161    | A8/B         | 4875/4625          | 35                         | 5032                          | 754                  |
| UR7532650112GTK  | 650/75 R32 | TL      | 650                          | 1795             | 172/172    | A8/B         | 6300/6300          | 46                         | 5331                          | 799                  |

GTK

GTK

- Ideal for all terrain conditions with its reinforced bead design
- Low soil compact feature thanks to its wide base
- Self-cleaning thanks to its non-directional tread pattern
- Reinforced tread and sidewall profiles against punctures



RF40  
RADIAL FLOTATION  
TYRES

| Product Code     | Tyre Size    | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            |                               |                      |
|------------------|--------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|                  |              |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                  |              |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| <b>45 SERIES</b> |              |         |                              |                  |            |              |                    |                            |                               |                      |
| UR4522560202GTK  | 560/45 R22.5 | TL      | 564                          | 1076             | 152        | D            | 3550               | 58                         | 3222                          | 488                  |
| <b>50 SERIES</b> |              |         |                              |                  |            |              |                    |                            |                               |                      |
| UR5022600202GTK  | 600/50 R22.5 | TL      | 591                          | 1172             | 159        | D            | 4375               | 58                         | 3493                          | 526                  |
| <b>60 SERIES</b> |              |         |                              |                  |            |              |                    |                            |                               |                      |
| UR6022500202GTK  | 500/60 R22.5 | TL      | 490                          | 1140             | 155        | D            | 3875               | 58                         | 3403                          | 513                  |

GTK



GTK

- Balanced non-directional pattern offers excellent soil protection
- Tuned footprint ensures smooth and comfortable maneuvers and low rolling resistance
- Strong & durable casing with steel belts provides high load carrying capacity and working speed



STEEL BELTED

NEW  
PATTERN

AGRIFLOW  
RADIAL FLOTATION  
TYRES

| Product Code     | Tyre Size    | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            | Dynamic Rolling Circumference | Static Loaded Radius |
|------------------|--------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|                  |              |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load |                               |                      |
|                  |              |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| 50 SERIES        |              |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR5022650222GTK | 650/50 R22.5 | TL      | 629                          | 1220             | 163        | D            | 4875               | 58                         | 3685                          | 544                  |
| 55 SERIES        |              |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR5526600222GTK | 600/55 R26.5 | TL      | 606                          | 1325             | 165        | D            | 5150               | 58                         | 4050                          | 598                  |
| *UR5526650222GTK | 650/55 R26.5 | TL      | 629                          | 1380             | 169        | D            | 6700               | 58                         | 4199                          | 620                  |
| 60 SERIES        |              |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR6022560222GTK | 560/60 R22.5 | TL      | 547                          | 1245             | 165        | D            | 4625               | 58                         | 3746                          | 553                  |
| 65 SERIES        |              |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR6522580222GTK | 580/65 R22.5 | TL      | 566                          | 1325             | 166        | D            | 5300               | 58                         | 3962                          | 585                  |
| *UR6530650222GTK | 650/65 R30.5 | TL      | 629                          | 1620             | 176        | D            | 7100               | 58                         | 4911                          | 725                  |

GTK

GTK

- Directional tread pattern and optimized crown radius provides improved traction and efficient self-cleaning along with good flotation characteristics.
- Robust radial construction and engineered tread compound ensures good roadability with improved mileage and consistent performance on farmland and roads.
- Reinforced bead and steel belts offers enhanced durability and excellent stability.



STEEL BELTED

NEW  
PATTERN

FLOSTER  
RADIAL FLOTATION  
TYRES

| Product Code     | Tyre Size    | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            | Dynamic Rolling Circumference | Static Loaded Radius |
|------------------|--------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|                  |              |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load |                               |                      |
|                  |              |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| 50 SERIES        |              |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR5022650212GTK | 650/50 R22.5 | TL      | 629                          | 1220             | 163        | D            | 4875               | 58                         | 3685                          | 544                  |
| 55 SERIES        |              |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR5526600212GTK | 600/55 R26.5 | TL      | 606                          | 1325             | 165        | D            | 5150               | 58                         | 4050                          | 598                  |
| *UR5526650212GTK | 650/55 R26.5 | TL      | 629                          | 1380             | 169        | D            | 6700               | 58                         | 4199                          | 620                  |
| 60 SERIES        |              |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR6022560212GTK | 560/60 R22.5 | TL      | 550                          | 1245             | 165        | D            | 4625               | 58                         | 3746                          | 553                  |
| 65 SERIES        |              |         |                              |                  |            |              |                    |                            |                               |                      |
| *UR6522580212GTK | 580/65 R22.5 | TL      | 566                          | 1325             | 166        | D            | 5300               | 58                         | 3962                          | 585                  |
| *UR6530650212GTK | 650/65 R30.5 | TL      | 629                          | 1620             | 176        | D            | 7100               | 58                         | 4199                          | 620                  |

GTK



# THE POWER OF SUSTAINABILITY

AGR ALFA-S

AGR ALFA-S redefines durability in agriculture with sustainable design. Made from 55% recyclable materials, it offers long-lasting performance in tough conditions.



# POWER MEETS INNOVATION

RF40 NTR

RF40 NTR combines innovation with agricultural productivity, setting a new standard. Designed with lavender oil, it delivers high performance while standing out with its refreshing scent.





GTK

- Tractor front tyre for general use
- Resistance to stone and impacts thanks to strong and robust body
- Smooth driving with gutters at central tread
- Prevention of skidding thanks to treads in shoulders
- Long lasting and economic use
- Excellent performance in highway and land



AS10  
FRONT TRACTOR  
TYRES

| Inflated Unloaded Dimensions |                        |         |               |                  |            |              | Load & Pressure    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U3162011GTK                  | 6.00-16 6PR            | TT      | 165           | 735              | 88         | A6           | 560                | 48                         | 2206                          | 335                  |
| U3162021GTK                  | 6.00-16 8PR            | TT      | 165           | 735              | 93         | A6           | 650                | 48                         | 2206                          | 335                  |
| U3163011GTK                  | 6.50-16 6PR            | TT      | 175           | 760              | 91         | A6           | 615                | 45                         | 2277                          | 345                  |
| U3163021GTK                  | 6.50-16 8PR            | TT      | 175           | 760              | 97         | A6           | 730                | 54                         | 2277                          | 345                  |
| U3164011GTK                  | 7.50-16 6PR            | TT      | 205           | 805              | 98         | A6           | 750                | 41                         | 2404                          | 363                  |
| U3164021GTK                  | 7.50-16 8PR            | TT      | 205           | 805              | 103        | A6           | 875                | 54                         | 2404                          | 363                  |

GTK

- Extra strong with its increased tread depth
- Comfortable driving in the field and on the road by pattern design
- Mud-free pattern



AS14  
FRONT TRACTOR  
TYRES

| Inflated Unloaded Dimensions |                        |         |               |                  |            |              | Load & Pressure    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U3162111GTK                  | 6.00-16 6PR            | TT      | 165           | 735              | 88         | A6           | 560                | 48                         | 2206                          | 335                  |
| U3162121GTK                  | 6.00-16 8PR            | TT      | 165           | 735              | 93         | A6           | 650                | 48                         | 2206                          | 335                  |
| U3163111GTK                  | 6.50-16 6PR            | TT      | 175           | 760              | 91         | A6           | 615                | 45                         | 2277                          | 345                  |
| U3163121GTK                  | 6.50-16 8PR            | TT      | 175           | 760              | 97         | A6           | 730                | 54                         | 2277                          | 345                  |
| U3164211GTK                  | 7.50-16 6PR            | TT      | 205           | 805              | 98         | A6           | 750                | 41                         | 2404                          | 363                  |
| U3164221GTK                  | 7.50-16 8PR            | TT      | 205           | 805              | 103        | A6           | 875                | 54                         | 2404                          | 363                  |
| U3191011GTK                  | 6.00-19 6PR            | TT      | 165           | 814              | 93         | A6           | 650                | 48                         | 2453                          | 374                  |

- Long lasting front tractor tyre
- High maneuverability thanks to nondirectional use feature
- Resistant structure against punctures thanks to increased tread depth



AS12  
FRONT TRACTOR  
TYRES

| Inflated Unloaded Dimensions |                        |         |               |                  |            |              | Load & Pressure    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U3164111GTK                  | 7.50-16 6PR            | TT      | 205           | 805              | 98         | A6           | 750                | 41                         | 2404                          | 363                  |
| U3164121GTK                  | 7.50-16 8PR            | TT      | 205           | 805              | 103        | A6           | 875                | 54                         | 2404                          | 363                  |
| U3181021GTK                  | 7.50-18 8PR            | TT      | 205           | 860              | 106        | A6           | 950                | 54                         | 2575                          | 390                  |
| U3201021GTK                  | 6.50-20 8PR            | TT      | 175           | 865              | 102        | A6           | 850                | 54                         | 2605                          | 397                  |
| U3202021GTK                  | 7.50-20 8PR            | TT      | 205           | 915              | 108        | A6           | 1000               | 49                         | 2747                          | 417                  |

- Suitable to asphalt and land usage
- Excellent maneuverability and nondirectional use
- Resistant structure against punctures
- Straight movement stability in soft land



AS16  
FRONT TRACTOR  
TYRES

| Inflated Unloaded Dimensions |                        |         |               |                  |            |              | Load & Pressure    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U3161011GTK                  | 5.50-16 6PR            | TT      | 150           | 710              | 86         | A6           | 530                | 54                         | 2135                          | 325                  |
| U3161021GTK                  | 5.50-16 8PR            | TT      | 150           | 710              | 91         | A6           | 615                | 54                         | 2135                          | 325                  |
| U3162211GTK                  | 6.00-16 6PR            | TT      | 165           | 735              | 88         | A6           | 560                | 48                         | 2206                          | 335                  |
| U3162221GTK                  | 6.00-16 8PR            | TT      | 165           | 735              | 93         | A6           | 650                | 48                         | 2206                          | 335                  |
| U3163211GTK                  | 6.50-16 6PR            | TT      | 175           | 760              | 91         | A6           | 615                | 45                         | 2277                          | 345                  |
| U3163221GTK                  | 6.50-16 8PR            | TT      | 175           | 760              | 97         | A6           | 730                | 54                         | 2277                          | 345                  |
| U3164311GTK                  | 7.50-16 6PR            | TT      | 205           | 805              | 98         | A6           | 750                | 41                         | 2404                          | 363                  |
| U3164321GTK                  | 7.50-16 8PR            | TT      | 205           | 805              | 103        | A6           | 875                | 54                         | 2404                          | 363                  |
| U3166021GTK                  | 9.00-16 8PR            | TT      | 234           | 855              | 111        | A6           | 1090               | 45                         | 2545                          | 383                  |
| U3167021GTK                  | 10.00-16 8PR           | TT      | 274           | 895              | 115        | A6           | 1215               | 41                         | 2658                          | 399                  |
| U3168021GTK                  | 11.00-16 8PR           | TT      | 315           | 965              | 118        | A6           | 1320               | 36                         | 2856                          | 427                  |
| U3181221GTK                  | 7.50-18 8PR            | TT      | 205           | 860              | 106        | A6           | 950                | 54                         | 2575                          | 390                  |



GTK

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100  
FRONT TRACTOR  
TYRES

Inflated Unloaded Dimensions

Load & Pressure

| Product Code | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U3151021GTK  | 7.50-15 8PR            | TT      | 205           | 780              | 99         | A6           | 775                | 52                         | 2325                          | 350                  |
| U3162311GTK  | 6.00-16 6PR            | TT      | 165           | 735              | 88         | A6           | 560                | 48                         | 2206                          | 335                  |
| U3162321GTK  | 6.00-16 8PR            | TT      | 165           | 735              | 93         | A6           | 650                | 48                         | 2206                          | 335                  |
| U3163311GTK  | 6.50-16 6PR            | TT      | 175           | 760              | 91         | A6           | 615                | 45                         | 2277                          | 345                  |
| U3163321GTK  | 6.50-16 8PR            | TT      | 175           | 760              | 97         | A6           | 730                | 54                         | 2277                          | 345                  |
| U3164421GTK  | 7.50-16 8PR            | TT      | 205           | 805              | 103        | A6           | 875                | 54                         | 2404                          | 363                  |
| U3181421GTK  | 7.50-18 8PR            | TT      | 205           | 860              | 106        | A6           | 950                | 54                         | 2575                          | 390                  |
| U3202121GTK  | 7.50-20 8PR            | TT      | 205           | 915              | 108        | A6           | 1000               | 49                         | 2747                          | 417                  |
| U3203011GTK  | 9.5-20 6PR             | TT      | 241           | 940              | 101        | A6           | 825                | 30                         | 2817                          | 427                  |
| U3203021GTK  | 9.5-20 8PR             | TT      | 241           | 940              | 106        | A6           | 950                | 35                         | 2817                          | 427                  |
| U3203022GTK  | 9.5-20 8PR             | TL      | 241           | 940              | 106        | A6           | 950                | 35                         | 2817                          | 427                  |
| U3204021GTK  | 11.2-20 8PR            | TT      | 285           | 1005             | 113        | A6           | 1150               | 38                         | 3001                          | 453                  |
| U3204022GTK  | 11.2-20 8PR            | TL      | 285           | 1005             | 113        | A6           | 1150               | 38                         | 3001                          | 453                  |

GTK

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100  
REAR TRACTOR  
TYRES

Inflated Unloaded Dimensions

Load & Pressure

| Product Code | Tyre Size & Ply Rating         | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|--------------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                                |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U5241011GTK  | 8.3-24 6PR                     | TT      | 210           | 1009             | 105        | A6           | 925                | 30                         | 3044                          | 465                  |
| U5241021GTK  | 8.3-24 8PR                     | TT      | 210           | 1009             | 108        | A6           | 1000               | 35                         | 3044                          | 465                  |
| U5242011GTK  | 9.50-24 6PR                    | TT      | 241           | 1050             | 110        | A6           | 1060               | 26                         | 3160                          | 481                  |
| U5242021GTK  | 9.50-24 8PR                    | TT      | 241           | 1050             | 116        | A6           | 1250               | 34                         | 3160                          | 481                  |
| U5243011GTK  | 11.2-24 6PR                    | TT      | 284           | 1105             | 110        | A6           | 1060               | 26                         | 3316                          | 503                  |
| U5243021GTK  | 11.2-24 8PR                    | TT      | 284           | 1105             | 116        | A6           | 1250               | 34                         | 3316                          | 503                  |
| U5243041GTK  | 11.2-24 12PR                   | TT      | 284           | 1105             | 122        | A6           | 1500               | 40                         | 3316                          | 503                  |
| U5244011GTK  | 12.4-24 6PR                    | TT      | 315           | 1160             | 115        | A6           | 1215               | 24                         | 3471                          | 525                  |
| U5244021GTK  | 12.4-24 8PR                    | TT      | 315           | 1160             | 118        | A6           | 1320               | 29                         | 3471                          | 525                  |
| U5244121GTK  | 320/85-24 8PR                  | TT      | 315           | 1160             | 118        | A6           | 1320               | 29                         | 3471                          | 525                  |
| U5244041GTK  | 12.4-24 12PR                   | TT      | 315           | 1160             | 124        | A6           | 1600               | 35                         | 3471                          | 525                  |
| U5244141GTK  | 320/85-24 12PR                 | TT      | 315           | 1160             | 124        | A6           | 1600               | 35                         | 3471                          | 525                  |
| U5245011GTK  | 13.6-24 6PR                    | TT      | 345           | 1210             | 120        | A6           | 1400               | 22                         | 3613                          | 545                  |
| U5245021GTK  | 13.6-24 8PR                    | TT      | 345           | 1210             | 123        | A6           | 1550               | 28                         | 3613                          | 545                  |
| U5245041GTK  | 13.6-24 12PR                   | TT      | 345           | 1210             | 129        | A6           | 1850               | 34                         | 3613                          | 545                  |
| U5246011GTK  | 14.9-24 6PR                    | TT      | 378           | 1265             | 125        | A6           | 1650               | 20                         | 3768                          | 567                  |
| U5246021GTK  | 14.9-24 8PR                    | TT      | 378           | 1265             | 128        | A6           | 1800               | 26                         | 3768                          | 567                  |
| U5246121GTK  | 380/85-24 8PR                  | TT      | 378           | 1265             | 128        | A6           | 1800               | 26                         | 3768                          | 567                  |
| U5246031GTK  | 14.9-24 10PR                   | TT      | 378           | 1265             | 131        | A6           | 1950               | 30                         | 3768                          | 567                  |
| U5246131GTK  | 380/85-24 10PR                 | TT      | 378           | 1265             | 131        | A6           | 1950               | 30                         | 3768                          | 567                  |
| U5246051GTK  | 14.9-24 14PR                   | TT      | 378           | 1265             | 137        | A6           | 2300               | 38                         | 3768                          | 567                  |
| U5248021GTK  | 16.9-24 8PR                    | TT      | 429           | 1335             | 133        | A6           | 2060               | 25                         | 3966                          | 595                  |
| U5248031GTK  | 16.9-24 10PR                   | TT      | 429           | 1335             | 136        | A6           | 2240               | 29                         | 3966                          | 595                  |
| U5248051GTK  | 16.9-24 14PR                   | TT      | 429           | 1335             | 141        | A6           | 2575               | 35                         | 3966                          | 595                  |
| U5247042GTK  | 15.5/80-24 12PR                | TL      | 394           | 1260             | 157        | A6           | 4125               | 44                         | 3754                          | 565                  |
| U5247062GTK  | 15.5/80-24 16PR                | TL      | 394           | 1260             | 163        | A6           | 4875               | 58                         | 3754                          | 565                  |
| U5261031GTK  | 14.9-26 10PR                   | TT      | 378           | 1315             | 133        | A6           | 2060               | 30                         | 3926                          | 592                  |
| U5262031GTK  | 18.4-26 10PR                   | TT      | 467           | 1461             | 142        | A6           | 2650               | 26                         | 4338                          | 650                  |
| U5262161GTK  | 18.4-26 16PR (AGRO - FORESTRY) | TL      | 467           | 1461             | 153        | A6           | 3650               | 44                         | 4338                          | 650                  |
| U5262061GTK  | 18.4-26 16PR                   | TT      | 467           | 1461             | 153        | A6           | 3650               | 44                         | 4338                          | 650                  |
| U5261051GTK  | 14.9-26 14PR                   | TT      | 378           | 1315             | 140        | A6           | 2500               | 39                         | 3926                          | 592                  |
| U5281011GTK  | 11.2-28 6PR                    | TT      | 284           | 1205             | 112        | A6           | 1120               | 26                         | 3630                          | 553                  |
| U5281021GTK  | 11.2-28 8PR                    | TT      | 284           | 1205             | 118        | A6           | 1320               | 34                         | 3630                          | 553                  |
| U5282011GTK  | 12.4-28 6PR                    | TT      | 315           | 1260             | 117        | A6           | 1285               | 25                         | 3786                          | 575                  |
| U5282021GTK  | 12.4-28 8PR                    | TT      | 315           | 1260             | 125        | A6           | 1650               | 30                         | 3786                          | 575                  |
| U5282221GTK  | 320/85-28 8PR                  | TT      | 315           | 1260             | 125        | A6           | 1650               | 30                         | 3786                          | 575                  |
| U5283011GTK  | 13.6-28 6PR                    | TT      | 345           | 1310             | 121        | A6           | 1450               | 23                         | 3927                          | 595                  |
| U5283021GTK  | 13.6-28 8PR                    | TT      | 345           | 1310             | 125        | A6           | 1650               | 29                         | 3927                          | 595                  |
| U5284011GTK  | 14.9-28 6PR                    | TT      | 378           | 1365             | 125        | A6           | 1650               | 20                         | 4083                          | 617                  |
| U5284021GTK  | 14.9-28 8PR                    | TT      | 378           | 1365             | 130        | A6           | 1900               | 26                         | 4083                          | 617                  |
| U5284051GTK  | 14.9-28 14PR                   | TT      | 378           | 1365             | 143        | A6           | 2725               | 40                         | 4083                          | 617                  |
| U5285021GTK  | 16.9-28 8PR                    | TT      | 429           | 1435             | 135        | A6           | 2180               | 24                         | 4281                          | 645                  |
| U5285031GTK  | 16.9-28 10PR                   | TT      | 429           | 1435             | 139        | A6           | 2430               | 29                         | 4281                          | 645                  |
| U5285051GTK  | 16.9-28 14PR                   | TT      | 429           | 1435             | 143        | A6           | 2725               | 34                         | 4281                          | 645                  |
| U5301021GTK  | 14.9-30 8PR                    | TT      | 378           | 1415             | 132        | A6           | 2000               | 26                         | 4240                          | 642                  |
| U5301031GTK  | 14.9-30 10PR                   | TT      | 378           | 1415             | 136        | A6           | 2240               | 29                         | 4240                          | 642                  |
| U5302021GTK  | 16.9-30 8PR                    | TT      | 429           | 1485             | 137        | A6           | 2300               | 25                         | 4438                          | 670                  |

GTK



GTK

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100  
REAR TRACTOR  
TYRES

| Inflated Unloaded Dimensions |                        |         |               |                  |            |              |                    |                            |                               |                      | Load & Pressure |  |  |  |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|-----------------|--|--|--|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |                 |  |  |  |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |                 |  |  |  |
| U5302031GTK                  | 16.9-30 10PR           | TT      | 429           | 1485             | 144        | A6           | 2800               | 28                         | 4438                          | 670                  |                 |  |  |  |
| U5302051GTK                  | 16.9-30 14PR           | TT      | 429           | 1485             | 150        | A6           | 3350               | 34                         | 4438                          | 670                  |                 |  |  |  |
| U5302151GTK                  | 420/85-30 14PR         | TT      | 429           | 1485             | 150        | A6           | 3350               | 34                         | 4438                          | 670                  |                 |  |  |  |
| U5303021GTK                  | 18.4-30 8PR            | TT      | 467           | 1550             | 139        | A6           | 2430               | 20                         | 4622                          | 696                  |                 |  |  |  |
| U5303121GTK                  | 460/85-30 8PR          | TT      | 467           | 1550             | 139        | A6           | 2430               | 20                         | 4622                          | 696                  |                 |  |  |  |
| U5303031GTK                  | 18.4-30 10PR           | TT      | 467           | 1550             | 145        | A6           | 2900               | 26                         | 4622                          | 696                  |                 |  |  |  |
| U5303131GTK                  | 460/85-30 10PR         | TT      | 467           | 1550             | 145        | A6           | 2900               | 26                         | 4622                          | 696                  |                 |  |  |  |
| U5303051GTK                  | 18.4-30 14PR           | TT      | 467           | 1550             | 154        | A6           | 3750               | 40                         | 4622                          | 696                  |                 |  |  |  |
| U5303151GTK                  | 460/85-30 14PR         | TT      | 467           | 1550             | 154        | A6           | 3750               | 40                         | 4622                          | 696                  |                 |  |  |  |
| U5321021GTK                  | 8.3-32 8PR             | TT      | 211           | 1195             | 111        | A6           | 1090               | 46                         | 3634                          | 559                  |                 |  |  |  |
| U5322021GTK                  | 9.5-32 8PR             | TT      | 241           | 1250             | 115        | A6           | 1215               | 39                         | 3790                          | 581                  |                 |  |  |  |
| U5323021GTK                  | 12.4-32 8PR            | TT      | 315           | 1360             | 125        | A6           | 1650               | 32                         | 4101                          | 625                  |                 |  |  |  |
| U5341031GTK                  | 16.9-34 10PR           | TT      | 429           | 1585             | 142        | A6           | 2650               | 29                         | 4753                          | 720                  |                 |  |  |  |
| U5341131GTK                  | 420/85-34 10PR         | TT      | 429           | 1585             | 142        | A6           | 2650               | 29                         | 4753                          | 720                  |                 |  |  |  |
| U5341051GTK                  | 16.9-34 14PR           | TT      | 429           | 1585             | 148        | A6           | 3150               | 37                         | 4753                          | 720                  |                 |  |  |  |
| U5341151GTK                  | 420/85-34 14PR         | TT      | 429           | 1585             | 148        | A6           | 3150               | 37                         | 4753                          | 720                  |                 |  |  |  |
| U5342031GTK                  | 18.4-34 10PR           | TT      | 467           | 1650             | 146        | A6           | 3000               | 26                         | 4937                          | 746                  |                 |  |  |  |
| U5342131GTK                  | 460/85-34 10PR         | TT      | 467           | 1650             | 146        | A6           | 3000               | 26                         | 4937                          | 746                  |                 |  |  |  |
| U5342051GTK                  | 18.4-34 14PR           | TT      | 467           | 1650             | 153        | A6           | 3650               | 36                         | 4937                          | 746                  |                 |  |  |  |
| U5361011GTK                  | 12.4-36 6PR            | TT      | 315           | 1465             | 121        | A6           | 1450               | 24                         | 4429                          | 677                  |                 |  |  |  |
| U5361021GTK                  | 12.4-36 8PR            | TT      | 315           | 1465             | 126        | A6           | 1700               | 29                         | 4429                          | 677                  |                 |  |  |  |
| U5362011GTK                  | 13.6-36 6PR            | TT      | 345           | 1515             | 125        | A6           | 1650               | 23                         | 4571                          | 697                  |                 |  |  |  |
| U5362021GTK                  | 13.6-36 8PR            | TT      | 345           | 1515             | 129        | A6           | 1850               | 29                         | 4571                          | 697                  |                 |  |  |  |
| U5381021GTK                  | 12.4-38 8PR            | TT      | 315           | 1515             | 127        | A6           | 1750               | 29                         | 4587                          | 703                  |                 |  |  |  |
| U5382011GTK                  | 13.6-38 6PR            | TT      | 345           | 1565             | 126        | A6           | 1700               | 23                         | 4728                          | 723                  |                 |  |  |  |
| U5382021GTK                  | 13.6-38 8PR            | TT      | 345           | 1565             | 131        | A6           | 1950               | 29                         | 4728                          | 723                  |                 |  |  |  |
| U5382031GTK                  | 13.6-38 10PR           | TT      | 345           | 1565             | 135        | A6           | 2180               | 33                         | 4728                          | 723                  |                 |  |  |  |
| U5383021GTK                  | 14.00-38 8PR           | TT      | 345           | 1565             | 131        | A6           | 1950               | 29                         | 4728                          | 723                  |                 |  |  |  |
| U5383031GTK                  | 14.00-38 10PR          | TT      | 345           | 1565             | 135        | A6           | 2180               | 33                         | 4728                          | 723                  |                 |  |  |  |
| U5384031GTK                  | 15.5-38 10PR           | TT      | 394           | 1570             | 138        | A6           | 2360               | 33                         | 4742                          | 725                  |                 |  |  |  |
| U5384041GTK                  | 15.5-38 12PR           | TT      | 394           | 1570             | 141        | A6           | 2575               | 38                         | 4742                          | 725                  |                 |  |  |  |
| U5385031GTK                  | 16.9-38 10PR           | TT      | 429           | 1685             | 145        | A6           | 2900               | 30                         | 5067                          | 771                  |                 |  |  |  |
| U5385051GTK                  | 16.9-38 14PR           | TT      | 429           | 1685             | 152        | A6           | 3550               | 40                         | 5067                          | 771                  |                 |  |  |  |
| U5386031GTK                  | 18.4-38 10PR           | TT      | 467           | 1750             | 147        | A6           | 3075               | 26                         | 5251                          | 797                  |                 |  |  |  |
| U5386051GTK                  | 18.4-38 14PR           | TT      | 467           | 1750             | 154        | A6           | 3750               | 36                         | 5251                          | 797                  |                 |  |  |  |
| U5262051GTK                  | 18.4-26 14PR           | TT      | 467           | 1461             | 150        | A6           | 3350               | 40                         | 4338                          | 650                  |                 |  |  |  |

GTK

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS110  
REAR TRACTOR  
TYRES

| Inflated Unloaded Dimensions |                        |         |               |                  |            |              |                    |                            |                               |                      | Load & Pressure |  |  |  |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|-----------------|--|--|--|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |                 |  |  |  |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |                 |  |  |  |
| U5302221GTK                  | 16.9-30 8PR            | TT      | 429           | 1485             | 137        | A6           | 2300               | 25                         | 4438                          | 670                  |                 |  |  |  |
| U5302231GTK                  | 16.9-30 10PR           | TT      | 429           | 1485             | 144        | A6           | 2800               | 28                         | 4438                          | 670                  |                 |  |  |  |
| U5302241GTK                  | 16.9-30 12PR           | TT      | 429           | 1485             | 147        | A6           | 3075               | 31                         | 4438                          | 670                  |                 |  |  |  |
| U5302251GTK                  | 16.9-30 14PR           | TT      | 429           | 1485             | 150        | A6           | 3350               | 34                         | 4438                          | 670                  |                 |  |  |  |
| U5384141GTK                  | 15.5-38 12PR           | TT      | 394           | 1570             | 141        | A6           | 2575               | 38                         | 4742                          | 725                  |                 |  |  |  |
| U5385131GTK                  | 16.9-38 10PR           | TT      | 429           | 1685             | 145        | A6           | 2900               | 30                         | 5067                          | 771                  |                 |  |  |  |

GTK



GTK

- Superior traction and high ground stability
- Minimum rolling circumference, delivering superior performance and reduced energy consumption
- Optimized design, providing a powerful and efficient solution for modern irrigation systems



NEW  
PATTERN

AS127  
IRRIGATION  
TYRES

| Inflated Unloaded Dimensions |                        |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U5246421GTK                  | 14.9-24 8PR            | TT      | 370           | 1230             | 128        | A6           | 1800               | 26                         | 3671                          | 558                  |
| U5246422GTK                  | 14.9-24 8PR            | TL      | 370           | 1230             | 128        | A6           | 1800               | 26                         | 3671                          | 558                  |

GTK

- Easy rolling resistance with five-rib design
- Suitable for both on and off road application
- Designed for field / road transport and soil tillage operations with implement machinery and trailers
- Good flotation properties with a high load capacity at low tyre pressure



BT48  
HARVESTER  
TYRES

| Inflated Unloaded Dimensions |                        |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4242032GTK                  | 9.00-24 10PR           | TL      | 272           | 1094             | 124        | B            | 1600               | 41                         | 3285                          | 499                  |
| U4203052GTK                  | 16.0-70-20 14PR        | TL      | 418           | 1075             | 154        | A6           | 3750               | 51                         | 3099                          | 438                  |

GTK

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS120  
IRRIGATION  
TYRES

| Inflated Unloaded Dimensions |                          |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|--------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating   | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                          |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U5243111GTK                  | 11.2-24 6PR (IRRIGATION) | TT      | 284           | 1105             | 110        | A6           | 1060               | 26                         | 3316                          | 503                  |
| U5243121GTK                  | 11.2-24 8PR (IRRIGATION) | TT      | 284           | 1105             | 116        | A6           | 1250               | 34                         | 3316                          | 503                  |
| U5380911GTK                  | 11.2-38 6PR (IRRIGATION) | TT      | 284           | 1450             | 117        | A6           | 1285               | 19                         | 4403                          | 677                  |
| U5380921GTK                  | 11.2-38 8PR (IRRIGATION) | TT      | 284           | 1450             | 122        | A6           | 1500               | 26                         | 4403                          | 677                  |

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth



BT20  
HARVESTER  
TYRES

| Inflated Unloaded Dimensions |                        |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4181041GTK                  | 10.5/80-18 12PR        | TT      | 274           | 885              | 135/123    | A8           | 2180               | 65                         | 2646                          | 400                  |
| U4182051GTK                  | 12.5/80-18 14PR        | TT      | 308           | 965              | 144/131    | A8           | 2800               | 62                         | 2872                          | 432                  |
| U4183061GTK                  | 13.0/65-18 16PR        | TT      | 336           | 890              | 144/131    | A8           | 2800               | 71                         | 2660                          | 402                  |



GTK

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100  
HARVESTER  
TYRES

|              |                        | Inflated Unloaded Dimensions |               |                  | Load & Pressure |              |                    |                            |                               |                      |
|--------------|------------------------|------------------------------|---------------|------------------|-----------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TL / TT                      | Section Width | Overall Diameter | Load Index      | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |                              | (mm)          | (mm)             |                 |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U5263072GTK  | 23.1-26 18PR           | TL                           | 587           | 1605             | 162             | A6           | 4750               | 37                         | 4746                          | 708                  |
| U5303261GTK  | 18.4-30 16PR           | TT                           | 467           | 1550             | 158             | A6           | 4250               | 45                         | 4622                          | 696                  |
| U5303361GTK  | 460/85-30 16PR         | TT                           | 467           | 1550             | 158             | A6           | 4250               | 45                         | 4622                          | 696                  |
| U5304072GTK  | 23.1-30 18PR           | TL                           | 587           | 1715             | 160             | A6           | 4500               | 36                         | 5088                          | 762                  |
| U5342061GTK  | 18.4-34 16PR           | TT                           | 467           | 1650             | 159             | A6           | 4375               | 45                         | 4937                          | 746                  |
| U5387061GTK  | 20.8-38 16PR           | TT                           | 528           | 1840             | 162             | A6           | 4750               | 39                         | 5506                          | 833                  |
| U5387062GTK  | 20.8-38 16PR           | TL                           | 528           | 1840             | 162             | A6           | 4750               | 39                         | 5506                          | 833                  |

GTK

- Resistance to stone and impacts thanks to its improved base
- General purpose trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



TN50  
FLOTATION  
TYRES

|              |                        | Inflated Unloaded Dimensions |               |                  | Load & Pressure |              |                    |                            |                               |                      |
|--------------|------------------------|------------------------------|---------------|------------------|-----------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TL / TT                      | Section Width | Overall Diameter | Load Index      | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |                              | (mm)          | (mm)             |                 |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4161041GTK  | 7.50-16 12PR           | TT                           | 214           | 787              | 121             | A8           | 1450               | 72                         | 2353                          | 355                  |
| U4201051GTK  | 8.25-20 14PR           | TT                           | 234           | 970              | 133             | A6           | 2060               | 90                         | 2902                          | 439                  |

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



TN52  
FLOTATION  
TYRES

|              |                        | Inflated Unloaded Dimensions |               |                  | Load & Pressure |              |                    |                            |                               |                      |
|--------------|------------------------|------------------------------|---------------|------------------|-----------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TL / TT                      | Section Width | Overall Diameter | Load Index      | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |                              | (mm)          | (mm)             |                 |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4202051GTK  | 9.00-20 14PR           | TT                           | 247           | 1017             | 133             | A6           | 2060               | 81                         | 3035                          | 458                  |

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



TN60  
FLOTATION  
TYRES

|              |                        | Inflated Unloaded Dimensions |               |                  | Load & Pressure |              |                    |                            |                               |                      |
|--------------|------------------------|------------------------------|---------------|------------------|-----------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TL / TT                      | Section Width | Overall Diameter | Load Index      | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |                              | (mm)          | (mm)             |                 |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4162041GTK  | 9.00-16 12PR           | TT                           | 247           | 865              | 125             | A6           | 1650               | 58                         | 2573                          | 387                  |
| U4162051GTK  | 9.00-16 14PR           | TT                           | 247           | 865              | 128             | A6           | 1800               | 67                         | 2573                          | 387                  |





- Balanced driving and excellent traction thanks to its special design
- Increased water and mud discharge thanks to surrounded gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



**TN70**  
FLOTATION  
TYRES

|              |                        |         | Inflated Unloaded Dimensions |                  |            |              | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TL / TT | Section Width                | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4162141GTK  | 9.00-16 12PR           | TT      | 247                          | 865              | 125        | A6           | 1650               | 58                         | 2573                          | 387                  |
| U4162151GTK  | 9.00-16 14PR           | TT      | 247                          | 865              | 128        | A6           | 1800               | 67                         | 2573                          | 387                  |



- High load bearing capacity with strong structure and less soil compression with its wide base
- Anti-ground tread design



**BT25**  
FLOTATION  
TYRES

|              |                                    |         | Inflated Unloaded Dimensions |                  |            |              | Load & Pressure    |                            |                               |                      |
|--------------|------------------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating             | TL / TT | Section Width                | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                                    |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4153442GTK  | 260/70-15.3<br>(10.0/75-15.3) 12PR | TL      | 268                          | 753              | 126/114    | A8           | 1700               | 52                         | 2251                          | 340                  |
| U4153552GTK  | 300/80-15.3<br>(11.5/80-15.3) 14PR | TL      | 295                          | 869              | 141/129    | A8           | 2575               | 58                         | 2579                          | 386                  |
| U4153052GTK  | 12.5/80-15.3 14PR                  | TL      | 307                          | 889              | 142        | A8           | 2650               | 62                         | 2636                          | 394                  |

- Convenient to use in asphalt and land thanks to tread pattern
- Durable side wall with strong structure
- Soil holding feature with complex tread structure and channels
- Providing straight location to the ground thanks to tread design



**TN80**  
FLOTATION  
TYRES

|              |                        |         | Inflated Unloaded Dimensions |                  |            |              | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TL / TT | Section Width                | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4161141GTK  | 7.50-16 12PR           | TT      | 214                          | 787              | 121        | A8           | 1450               | 72                         | 2353                          | 355                  |

- Soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers
- The special tread compound resulting in exceptional cut and strong tread along with excellent wear resistance on all types of terrains



**BT22**  
FLOTATION  
TYRES

|              |                        |         | Inflated Unloaded Dimensions |                  |            |              | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TL / TT | Section Width                | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4173052GTK  | 500/50-17 14PR         | TL      | 503                          | 932              | 149        | A8           | 3250               | 41                         | 2771                          | 416                  |
| U4173072GTK  | 500/50-17 18PR         | TL      | 503                          | 932              | 157        | A8           | 4125               | 70                         | 2771                          | 416                  |



GTK

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth



BT20  
FLOTATION  
TYRES

| Inflated Unloaded Dimensions |                                 |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|---------------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating          | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                                 |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4151042GTK                  | 10.0/75-15.3 (260/70-15.3) 12PR | TL      | 264           | 760              | 126/114    | A8           | 1700               | 68                         | 2271                          | 343                  |
| U4151052GTK                  | 10.0/75-15.3 (260/70-15.3) 14PR | TL      | 264           | 760              | 130/118    | A8           | 1900               | 80                         | 2271                          | 343                  |
| U4152052GTK                  | 11.5/80-15.3 (300/80-15.3) 14PR | TL      | 290           | 845              | 139/126    | A8           | 2430               | 69                         | 2511                          | 377                  |
| U4153152GTK                  | 12.5/80-15.3 (320/80-15.3) 14PR | TL      | 307           | 889              | 142/129    | A8           | 2650               | 62                         | 2636                          | 394                  |
| U4163041GTK                  | 10.5/65-16 (265/65-16) 12PR     | TT      | 274           | 755              | 126/114    | A8           | 1700               | 65                         | 2262                          | 343                  |

GTK

- Extra strong against stretching thanks to strong frame structure
- Flexibility and deep tread profile



BT40  
FLOTATION  
TYRES

| Inflated Unloaded Dimensions |                        |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4153362GTK                  | 12.5/80-15.3 16PR      | TL      | 307           | 889              | 144/131    | A8           | 2800               | 71                         | 2636                          | 394                  |
| U4153772GTK                  | 400/60-15.5 18PR       | TL      | 404           | 874              | 151/139    | A8           | 3450               | 90                         | 2595                          | 389                  |
| U4221062GTK                  | 550/60-22.5 16PR       | TL      | 543           | 1244             | 167/163    | A8/B         | 3750               | 41                         | 3697                          | 555                  |

- High load bearing capacity with low section off road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern



BT44  
FLOTATION  
TYRES

| Inflated Unloaded Dimensions |                        |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4151142GTK                  | 10.0/75-15.3 12PR      | TL      | 264           | 760              | 126/114    | A8           | 1700               | 68                         | 2271                          | 343                  |
| U4152152GTK                  | 11.5/80-15.3 14PR      | TL      | 290           | 845              | 139/126    | A8           | 2430               | 69                         | 2511                          | 377                  |
| U4153252GTK                  | 12.5/80-15.3 14PR      | TL      | 307           | 889              | 142/129    | A8           | 2650               | 62                         | 2636                          | 394                  |

- Resistant to impacts and cuts thanks to the use of high quality compound
- Less soil compaction with large footprint
- Thanks to its special design, less tyre rolling resistance and fuel consumption



NEW  
PATTERN

BT41  
IMPLEMENT  
TYRES

| Inflated Unloaded Dimensions |                        |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U4154122GTK                  | 9.5L-15 SL 8PR         | TL      | 240           | 770              | 112        | B            | 1120               | 44                         | 2418                          | 350                  |
| U4154222GTK                  | 11L-15 SL 8PR          | TL      | 280           | 775              | 113        | B            | 1150               | 36                         | 2434                          | 352                  |
| U4154342GTK                  | 12.5L-15 SL 12PR       | TL      | 315           | 825              | 127        | B            | 1750               | 52                         | 2591                          | 372                  |



GTK

- Low rolling resistance
- High comfort
- Preventing skidding thanks to its special pattern
- Low soil compact feature thanks to its wide base



BT25  
IMPLEMENT  
TYRES

Inflated Unloaded Dimensions

Load & Pressure

| Product Code | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U1124032GTK  | 10.0/80-12 10PR        | TL      | 261           | 671              | 116        | A8           | 1250               | 57                         | 1993                          | 299                  |

GTK

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



AS100  
IMPLEMENT  
TYRES

Inflated Unloaded Dimensions

Load & Pressure

| Product Code | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U1152011GTK  | 6.50/80-15 6PR         | TT      | 163           | 663              | 96         | A6           | 710                | 52                         | 1994                          | 303                  |

- High tread depth
- Low rolling resistance
- High comfort
- Low soil compact feature thanks to its wide base



BT20  
IMPLEMENT  
TYRES

Inflated Unloaded Dimensions

Load & Pressure

| Product Code | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U1124132GTK  | 10.0/80-12 10PR        | TL      | 264           | 710              | 116        | A8           | 1250               | 57                         | 2103                          | 314                  |

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Holding features for dry and wet grounds thanks to its pattern



BT44  
IMPLEMENT  
TYRES

Inflated Unloaded Dimensions

Load & Pressure

| Product Code | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U1121001GTK  | 5.00-12 4PR            | TT      | 145           | 580              | 62         | A6           | 265                | 32                         | 1736                          | 262                  |
| U1123011GTK  | 7.00-12 6PR            | TT      | 200           | 683              | 83         | A6           | 485                | 36                         | 2027                          | 304                  |
| U1131011GTK  | 6.50/80-13 6PR         | TT      | 170           | 640              | 82         | A6           | 475                | 52                         | 1913                          | 289                  |



GTK

- High traction ability thanks to its angle blocks
- Easy movement ability thanks to anti-ground base design
- Preventing clusters in the center and sidewalls during movement of tractor thanks to its open design in center
- Facilitating releasing of muds thanks to windowed blocks



BT45  
IMPLEMENT  
TYRES

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load |                               |                      |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U1122011GTK  | 6.50/80-12 6PR         | TT      | 163                          | 588              | 80         | A6           | 450                | 52                         | 1758                          | 266                  |

GTK

- Specially designed for forestry application
- Special tread and sidewall compound provides maximum tyre life against cut and crack resistance
- Excellent puncture resistance thanks to strong breaker construction shoulder to shoulder,
- Lower lug angle providing excellent grip and self cleaning properties for logging operations
- Tie-bar on the central lugs protects the tyre against deep impacts.



FT80  
FORESTRY  
TYRES

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load |                               |                      |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U5262262GTK  | 18.4-26 16PR           | TL      | 467                          | 1461             | 153        | A6           | 3650               | 44                         | 4338                          | 650                  |

- Proper use in lands and gardens
- Strong and robust structure
- Preventing skidding thanks to its special pattern
- Long lasting and economic use
- Optimum performance with small-type gardening and agriculture vehicles




BT46  
IMPLEMENT  
TYRES

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load |                               |                      |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U1151011GTK  | 5.00-15 6PR            | TT      | 145                          | 655              | 76         | A6           | 400                | 50                         | 1972                          | 300                  |

GTK



# INDUSTRIAL, EM OTR TYRES

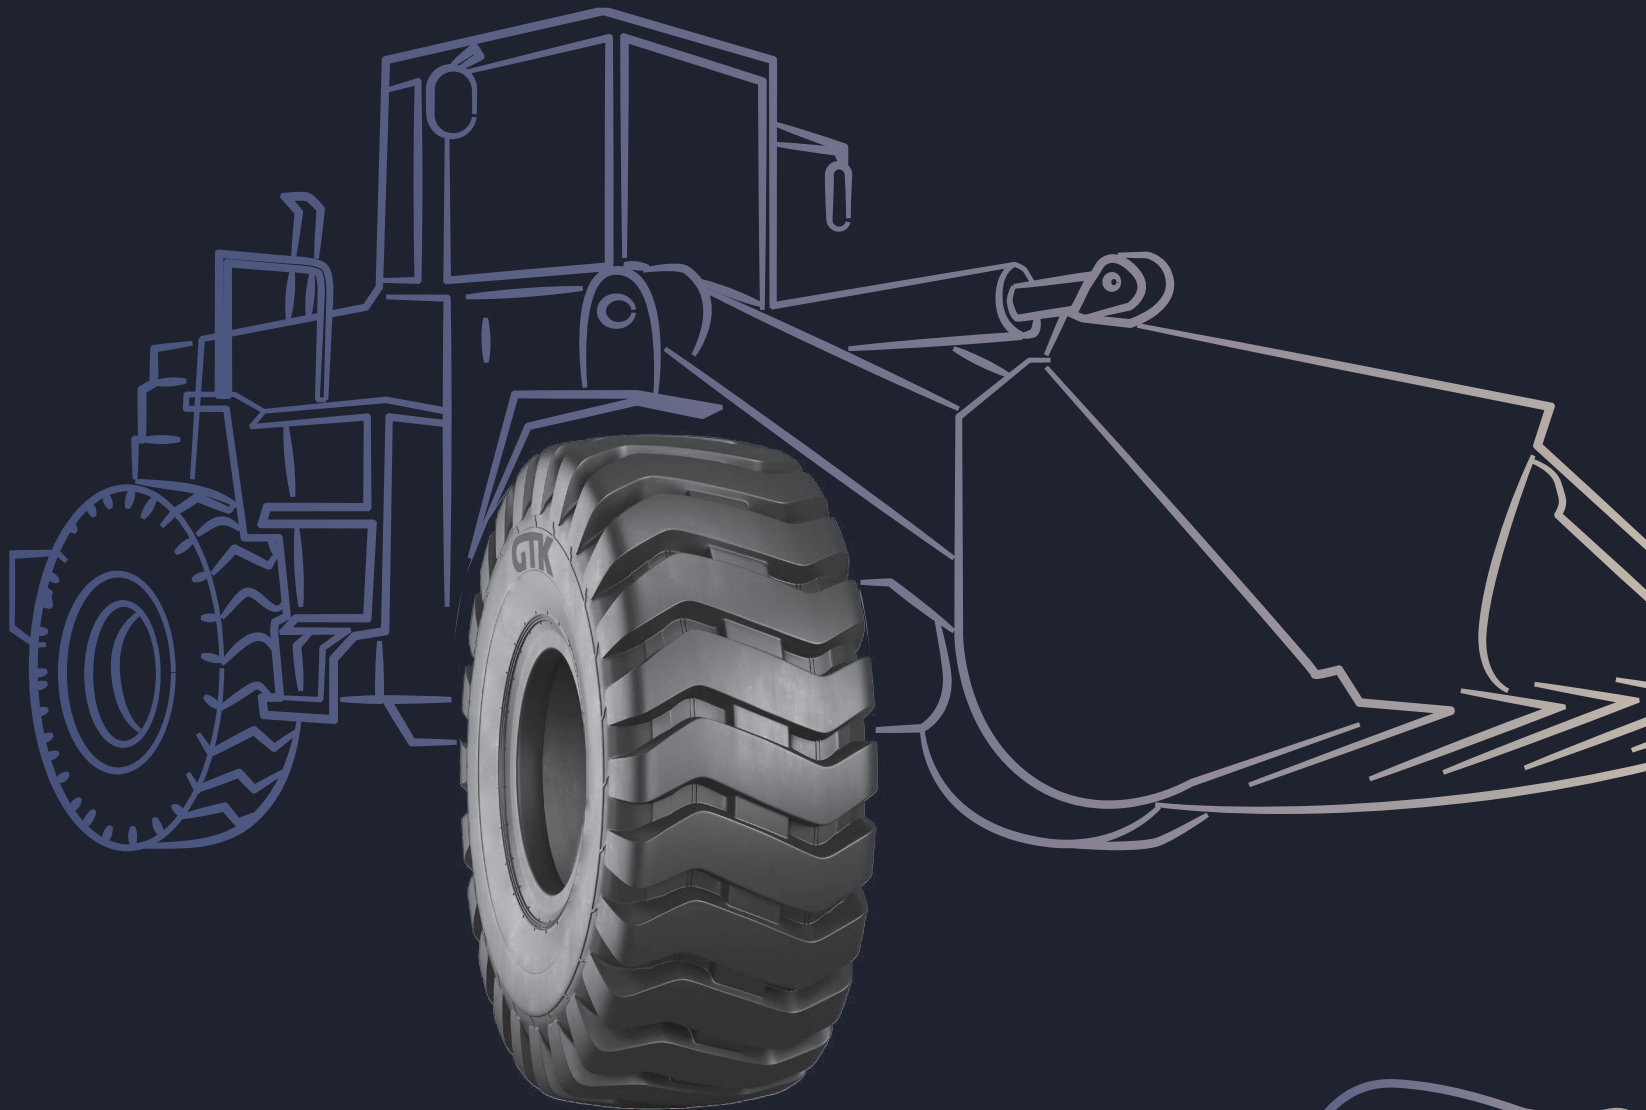

GTK

- All-Steel tyre specially designed for articulated dump trucks & wheel loaders operating in severe conditions.
- Robust casing with steel belt provides excellent durability and ground stability even with higher load carrying capacity.
- Multi-stepped rigid block tread design and special tread compound offers superior traction & self-cleaning properties along with increased resistance to tread cuts and external damages.



NEW  
PATTERN

**RI ST30**  
ALL STEEL  
RADIAL TYRES

| Product Code     | Tyre Size | Star Rating | TL / TT | Overall Diameter (mm) | Section Width (mm) | Static Loaded Radius (mm) | Dynamic Rolling Circumference (mm) | Rec. Rim (inch) | TRA Code | LI/SI  | Tyre Load Capacity (kg) | Tyre Pressure At Max. Load (psi) |
|------------------|-----------|-------------|---------|-----------------------|--------------------|---------------------------|------------------------------------|-----------------|----------|--------|-------------------------|----------------------------------|
| *URC025205702GTK | 20.5 R25  | **          | TL      | 1493                  | 525                | 664                       | 4456                               | 17.00/ 2.0 - 25 | E3       | 177 B  | 7300                    | 76                               |
|                  |           |             |         |                       |                    |                           |                                    |                 | L3       | 193 A2 | 11500                   | 94                               |
| *URC025235702GTK | 23.5 R25  | **          | TL      | 1624                  | 610                | 727                       | 4874                               | 19.50/ 2.5 - 25 | E3       | 185 B  | 9250                    | 76                               |
|                  |           |             |         |                       |                    |                           |                                    |                 | L3       | 201 A2 | 14500                   | 94                               |

GTK

- All-Steel tyre specially designed for articulated dump trucks & wheel loaders operating in severe conditions.
- Robust casing with steel belt provides excellent durability and ground stability even with higher load carrying capacity.
- Multi-stepped rigid block tread design and special tread compound offers superior traction & self-cleaning properties along with increased resistance to tread cuts and external damages.



NEW  
PATTERN

**RI ST33**  
ALL STEEL  
RADIAL TYRES

| Product Code     | Tyre Size | Star Rating | TL / TT | Overall Diameter (mm) | Section Width (mm) | Static Loaded Radius (mm) | Dynamic Rolling Circumference (mm) | Rec. Rim (inch) | TRA Code | LI/SI  | Tyre Load Capacity (kg) | Tyre Pressure At Max. Load (psi) |
|------------------|-----------|-------------|---------|-----------------------|--------------------|---------------------------|------------------------------------|-----------------|----------|--------|-------------------------|----------------------------------|
| *URC025265702GTK | 26.5 R25  | **          | TL      | 1745                  | 688                | 781                       | 5227                               | 22.00/ 3.0 - 25 | E3       | 193 B  | 11500                   | 76                               |
|                  |           |             |         |                       |                    |                           |                                    |                 | L3       | 209 A2 | 18500                   | 94                               |



GTK

- All-Steel tyre specially designed for grader application offering stable and steady performance on uneven terrain.
- Exclusive non-directional tread pattern provides excellent traction along with significant self-cleaning properties.
- Optimised tread compound for lower heat generation and higher tyre life.



NEW  
PATTERN

**DUTORR20**  
ALL STEEL  
RADIAL TYRES

| Product Code     | Tyre Size | Star Rating | TL / TT | Overall Diameter | Section Width | Static Loaded Radius | Dynamic Rolling Circumference | Rec. Rim (inch) | TRA Code | LI/SI  | Tyre Load Capacity (kg) | Tyre Pressure At Max. Load (psi) |
|------------------|-----------|-------------|---------|------------------|---------------|----------------------|-------------------------------|-----------------|----------|--------|-------------------------|----------------------------------|
| *URC024140612GTK | 14.00 R24 | *           | TL      | 1346             | 360           | 624                  | 4110                          | 9.00GR          | G2       | 153/A8 | 3650                    | 54                               |

GTK

- High traction thanks to its special tread design
- Exceptional wear resistance
- High load capacity thanks to its steel belts
- Balanced and comfortable ride
- Superior durability



STEEL  
BELTED

NEW  
PATTERN

**DUTORR40**  
RADIAL EM  
TYRES

| Tyre Info        |                       |       |          |          | Rim             | Inflated Unloaded Dimension |                    | Loaded Static Radius (mm) | Rolling Circumference (mm) | Inflation Pressure (psi) | Load Capacity (kg) * |         |         |            |            |
|------------------|-----------------------|-------|----------|----------|-----------------|-----------------------------|--------------------|---------------------------|----------------------------|--------------------------|----------------------|---------|---------|------------|------------|
| Product Code     | Tyre Size             | TT/TL | LI/SI    | TRA Code | Rec. Rim (inch) | Overall Diameter (mm)       | Section Width (mm) |                           |                            |                          | 10 km/h              | 25 km/h | 30 km/h | 40 km/h ** | 50 km/h ** |
| *UR7020400602GTK | 400/70 R20            | TL    | 149 A8/B | R-4      | 13              | 1068                        | 404                | 480                       | 3194                       | 58                       | 4065                 | 3610    | 3480    | 3250       | 3250       |
| *UR7020405602GTK | 405/70 R20            | TL    | 149 A8/B | R-4      | 13              | 1070                        | 414                | 480                       | 3200                       | 58                       | 4065                 | 3610    | 3480    | 3250       | 3250       |
| *UR7024460602GTK | 460/70 R24 (17.5LR24) | TL    | 159 A8/B | R-4      | DW15L           | 1251                        | 453                | 562                       | 3740                       | 58                       | 5470                 | 4855    | 4680    | 4375       | 4375       |

GTK

- High traction and comfort
- Longer service life
- Comfortable drive due to flexible sidewall structure
- Strong carcass structure
- Resistance to fatigue due to wide shoulder and blocks
- Strong tread compound for cut-resistance
- High performance due to wide base track
- Mud repellent feature due to specially designed tread pattern



**RI11**  
RADIAL EM  
TYRES

| Product Code    | Tyre Size  | TRA Code | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|-----------------|------------|----------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| 70 SERIES       |            |          |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| UR7024460712GTK | 460/70 R24 | R-4      | TL      | 455           | 1255             | 159/159    | A8/B         | 4375/4375          | 58                         | 3740                          | 563                  |
| UR7024500712GTK | 500/70 R24 | R-4      | TL      | 503           | 1310             | 164/164    | A8/B         | 5000               | 58                         | 4113                          | 592                  |
| 80 SERIES       |            |          |         |               |                  |            |              |                    |                            |                               |                      |
| UR8024440712GTK | 440/80 R24 | R-4      | TL      | 450           | 1320             | 154/154    | A8/B         | 3750/3750          | 46                         | 3924                          | 589                  |
| UR8028440712GTK | 440/80 R28 | R-4      | TL      | 450           | 1420             | 156/156    | A8/B         | 4000/4000          | 46                         | 4238                          | 639                  |

- Resistance to stone cuts, cracks and breaks
- Long wear-life



**LD94**  
EM / INDUSTRIAL  
TYRES

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                       | Load Index | Speed Symbol | Load & Pressure         |                                  | Dynamic Rolling Circumference | Static Loaded Radius |
|--------------|------------------------|---------|------------------------------|-----------------------|------------|--------------|-------------------------|----------------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width (mm)           | Overall Diameter (mm) |            |              | Tyre Load Capacity (kg) | Tyre Pressure At Max. Load (psi) |                               |                      |
| U6202061GTK  | 10.00-20 16PR          | TT      | 283                          | 1084                  | 146 / 143  | B            | 3000                    | 109                              | 3225                          | 484                  |
| U6202062GTK  | 10.00-20 16PR          | TL      | 283                          | 1084                  | 146 / 143  | B            | 3000                    | 109                              | 3225                          | 484                  |



- Long wear-life
- Cracking / fatigue resistance at treads
- Maximum traction
- Increased sidewall protection



**BC70**  
EM / INDUSTRIAL  
TYRES

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |

|             |              |    |     |     |     |    |      |    |      |     |
|-------------|--------------|----|-----|-----|-----|----|------|----|------|-----|
| U6161042GTK | 10-16.5 12PR | TL | 282 | 775 | 138 | A3 | 2360 | 84 | 2323 | 352 |
| U6162052GTK | 12-16.5 14PR | TL | 320 | 846 | 148 | A3 | 3150 | 90 | 2524 | 380 |

- High traction and comfort
- Designed compatible with scrap operations and recycling process
- Excellent maneuverability at high tonnage due to reinforced shoulder blocks.
- Comfortable drive due to flexible sidewall structure
- Reinforced tread structure
- Longer life due to improved tread structure
- Wear resistance due to special tread combination



**BC80**  
EM / INDUSTRIAL  
TYRES

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |

|             |                 |    |     |     |     |    |      |    |      |     |
|-------------|-----------------|----|-----|-----|-----|----|------|----|------|-----|
| U6161142GTK | 10-16.5 12PR    | TL | 282 | 775 | 138 | A3 | 2360 | 84 | 2323 | 352 |
| U6162152GTK | 12-16.5 14PR    | TL | 320 | 846 | 148 | A3 | 3150 | 90 | 2524 | 380 |
| U6182052GTK | 12.5/80-18 14PR | TL | 305 | 983 | 146 | A8 | 3000 | 62 | 2923 | 439 |

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life



**LD90**  
EM / INDUSTRIAL  
TYRES

| Product Code | Tyre Size & Ply Rating | TRA Code | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|----------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |          |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |          |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |

|             |                 |     |    |     |      |     |    |      |    |      |     |
|-------------|-----------------|-----|----|-----|------|-----|----|------|----|------|-----|
| U6161242GTK | 10-16.5 12PR    | R-4 | TL | 256 | 793  | 138 | A3 | 2360 | 84 | 2374 | 359 |
| U6162252GTK | 12-16.5 14PR    | R-4 | TL | 297 | 858  | 148 | A3 | 3150 | 90 | 2558 | 385 |
| U6181042GTK | 10.5/80-18 12PR | R-4 | TL | 271 | 892  | 135 | A8 | 2180 | 62 | 2666 | 403 |
| U6182152GTK | 12.5/80-18 14PR | R-4 | TL | 285 | 955  | 146 | A8 | 3000 | 62 | 2844 | 428 |
| U6207062GTK | 16.0/70-20 16PR | R-4 | TL | 385 | 1091 | 166 | A2 | 5300 | 65 | 3244 | 487 |
| U6207162GTK | 405/70-20 16PR  | R-4 | TL | 385 | 1091 | 166 | A2 | 5300 | 65 | 3244 | 487 |
| U6243062GTK | 15.5/80-24 16PR | R-4 | TL | 412 | 1269 | 162 | A8 | 4750 | 72 | 3780 | 569 |
| U6245062GTK | 16.0/70-24 16PR | R-4 | TL | 418 | 1200 | 169 | A2 | 5800 | 65 | 3584 | 541 |
| U6245162GTK | 405/70-24 16PR  | R-4 | TL | 418 | 1200 | 169 | A2 | 5800 | 65 | 3584 | 541 |
| U6246062GTK | 16.9-24 16PR    | R-4 | TL | 429 | 1310 | 154 | A8 | 3750 | 46 | 3895 | 585 |
| U6246162GTK | 440/80-24 16PR  | R-4 | TL | 429 | 1310 | 154 | A8 | 3750 | 46 | 3895 | 585 |
| U6247052GTK | 17.5L-24 14PR   | R-4 | TL | 475 | 1277 | 154 | A8 | 3750 | 46 | 3802 | 572 |
| U6248052GTK | 19.5L-24 14PR   | R-4 | TL | 495 | 1314 | 154 | A8 | 3750 | 38 | 3907 | 587 |
| U6251052GTK | 15.5-25 14PR    | R-4 | TL | 400 | 1286 | 173 | A2 | 6500 | 68 | 3836 | 578 |
| U6261052GTK | 18.4-26 14PR    | R-4 | TL | 467 | 1425 | 160 | A8 | 4500 | 42 | 4237 | 636 |
| U6281052GTK | 16.9-28 14PR    | R-4 | TL | 429 | 1410 | 156 | A8 | 4000 | 43 | 4210 | 635 |
| U6281152GTK | 440/80-28 14PR  | R-4 | TL | 429 | 1410 | 156 | A8 | 4000 | 43 | 4210 | 635 |
| U6301062GTK | 16.9-30 16PR    | R-4 | TL | 418 | 1466 | 156 | A8 | 4000 | 47 | 4384 | 663 |



- Pattern feature designed for non-road and highway use
- Excellent maneuverability due to nondirectional use feature



OC10  
EM / INDUSTRIAL  
TYRES

| Inflated Unloaded Dimensions |                        |         |               | Load & Pressure  |            |              |                    |                            |                               |                      |
|------------------------------|------------------------|---------|---------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code                 | Tyre Size & Ply Rating | TL / TT | Section Width | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|                              |                        |         | (mm)          | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |

|             |              |    |     |      |     |    |      |    |      |     |
|-------------|--------------|----|-----|------|-----|----|------|----|------|-----|
| U6204152GTK | 12.5-20 14PR | TL | 325 | 1040 | 137 | A8 | 2300 | 51 | 3100 | 467 |
|-------------|--------------|----|-----|------|-----|----|------|----|------|-----|

- Robust industrial pattern with higher resistance to puncture and tread wear
- Higher traction with wide pattern design at the center lug
- Reinforced bead design



LD96  
EM / INDUSTRIAL  
TYRES

|              |                        |          |         | Inflated Unloaded Dimensions |                  |            |              | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|----------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TRA Code | TL / TT | Section Width                | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |          |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |

|             |                 |     |    |     |      |     |    |      |    |      |     |
|-------------|-----------------|-----|----|-----|------|-----|----|------|----|------|-----|
| U6182352GTK | 12.5/80-18 14PR | R-4 | TL | 308 | 987  | 146 | A8 | 3000 | 62 | 2934 | 441 |
| U6183052GTK | 340/80-18 14PR  | R-4 | TL | 343 | 1001 | 146 | A8 | 3000 | 62 | 2974 | 446 |
| U6207262GTK | 16.0/70-20 16PR | R-4 | TL | 385 | 1091 | 166 | A2 | 5300 | 65 | 3244 | 487 |
| U6206052GTK | 14.5-20 14PR    | R-4 | TL | 355 | 1095 | 143 | D  | 2725 | 51 | 3256 | 489 |

- High traction and comfort
- Resistance to any kind of impacts with its tread structure
- Comfortable drive due to flexible sidewall structure
- Reinforced bead design
- Reinforced sidewall structure
- Excellent maneuverability at high tonnage due to flexible sidewall structure
- Longer life with its reinforced tread pattern
- Strong tread compound against punctures and impacts
- Longer life due to increased tread number and improved tread depth



LD92  
EM / INDUSTRIAL  
TYRES

|              |                        |          |         | Inflated Unloaded Dimensions |                  |            |              | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|----------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TRA Code | TL / TT | Section Width                | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |          |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |

|             |                 |     |    |     |     |     |    |      |    |      |     |
|-------------|-----------------|-----|----|-----|-----|-----|----|------|----|------|-----|
| U6182252GTK | 12.5/80-18 14PR | R-4 | TL | 304 | 965 | 146 | A8 | 3000 | 62 | 2872 | 432 |
|-------------|-----------------|-----|----|-----|-----|-----|----|------|----|------|-----|

- Strong and durable thanks to excellent design
- Its compound resistant to wear, and its blocks resistant to heavy conditions with long maintenance periods
- Minimizing stretching at base with its strong blocks in its center



HP100  
EM / INDUSTRIAL  
TYRES

|              |                        |          |         | Inflated Unloaded Dimensions |                  |            |              | Load & Pressure    |                            | TYRES                         |                      |
|--------------|------------------------|----------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
| Product Code | Tyre Size & Ply Rating | TRA Code | TL / TT | Section Width                | Overall Diameter | Load Index | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |          |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |

|             |               |             |    |     |      |     |    |       |     |      |     |
|-------------|---------------|-------------|----|-----|------|-----|----|-------|-----|------|-----|
| U6242002GTK | 14.00-24 24PR | E - 3 L - 3 | TL | 375 | 1360 | 186 | A2 | 9500  | 123 | 4037 | 605 |
| U6242042GTK | 14.00-24 32PR | E - 3 L - 3 | TL | 375 | 1360 | 190 | A2 | 10600 | 145 | 4037 | 605 |
| U6251062GTK | 15.5-25 16PR  | E - 3 L - 3 | TL | 384 | 1261 | 175 | A2 | 6900  | 72  | 3765 | 568 |
| U6252082GTK | 17.5-25 20PR  | E - 3 L - 3 | TL | 455 | 1371 | 181 | A2 | 8250  | 83  | 4076 | 612 |
| U6254002GTK | 20.5-25 24PR  | E - 3 L - 3 | TL | 531 | 1527 | 189 | A2 | 10300 | 76  | 4517 | 674 |
| U6255002GTK | 23.5-25 24PR  | E - 3 L - 3 | TL | 604 | 1625 | 196 | A2 | 12500 | 68  | 4794 | 714 |
| U6256022GTK | 26.5-25 28PR  | E - 4 L - 4 | TL | 702 | 1785 | 203 | A2 | 15500 | 68  | 5246 | 778 |
| U6256042GTK | 26.5-25 32PR  | E - 4 L - 4 | TL | 702 | 1785 | 206 | A2 | 17000 | 79  | 5246 | 778 |
| U6257042GTK | 29.5-25 32PR  | E - 4 L - 4 | TL | 758 | 1923 | 210 | A2 | 19000 | 72  | 5637 | 833 |



- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life



**GD90**  
**EM / INDUSTRIAL**  
**TYRES**

| Product Code | Tyre Size & Ply Rating | TRA Code | TL / TT | Inflated Unloaded Dimensions |                  | Load & Pressure |              |                    |                            |                               |                      |
|--------------|------------------------|----------|---------|------------------------------|------------------|-----------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |          |         | Section Width                | Overall Diameter | Load Index      | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |          |         | (mm)                         | (mm)             |                 |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U6241062GTK  | 13.00-24 16PR          | G2       | TL      | 335                          | 1280             | 151             | A8           | 3450               | 58                         | 3811                          | 573                  |
| U6242062GTK  | 14.00-24 16PR          | G2       | TL      | 382                          | 1354             | 153             | A8           | 3650               | 54                         | 4020                          | 603                  |

- Strong structure
- Increased tread depth and tread pattern providing optimum traction in muddy fields



**GD92**  
**EM / INDUSTRIAL**  
**TYRES**

| Product Code | Tyre Size & Ply Rating | TRA Code | TL / TT | Inflated Unloaded Dimensions |                  | Load & Pressure |              |                    |                            |                               |                      |
|--------------|------------------------|----------|---------|------------------------------|------------------|-----------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |          |         | Section Width                | Overall Diameter | Load Index      | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |          |         | (mm)                         | (mm)             |                 |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U6244062GTK  | 16.00-24 16PR          | G2       | TL      | 432                          | 1493             | 160             | A8           | 4500               | 47                         | 4413                          | 658                  |

- Wide shoulder and base width, blocked design
- High traction ability
- Anti-wear future thanks to its pattern appropriate for agricultural, industrial and off road use
- Consisting durable blocks
- Easy use in soft grounds
- Balanced driving and easy control thanks to wide shoulder and blocks



**GD94**  
**COMPACTOR**  
**TYRES**

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U6262052GTK  | 23.1-26 14PR           | TL      | 587                          | 1580             | 166        | A8           | 5300               | 33                         | 4675                          | 698                  |

- Compressing ability for asphalt with its plane surfaced tread pattern
- Stable operation feature thanks to strong frame at sidewalls



**SM40**  
**COMPACTOR**  
**TYRES**

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure    |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U6201041GTK  | 9.00-20 12PR           | TT      | 256                          | 1002             | 157        | A2           | 4125               | 94                         | 2993                          | 452                  |
| U6203061GTK  | 11.00-20 16PR          | TT      | 290                          | 1040             | 168        | A2           | 5600               | 107                        | 3100                          | 467                  |



- High kilometer performance thanks to its special structure
- Comfortable driving thanks to excellent traction
- Maximum traction
- Long wear-life
- Resistance to any kind of impacts



CK50  
FORKLIFT  
TYRES

| Product Code | Tyre Size & Ply Rating | TL/ TT | Inflated Unloaded Dimensions |                  | Load & Pressure |              |                    |                            |                               |                      |
|--------------|------------------------|--------|------------------------------|------------------|-----------------|--------------|--------------------|----------------------------|-------------------------------|----------------------|
|              |                        |        | Section Width                | Overall Diameter | Load Index      | Speed Symbol | Tyre Load Capacity | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |        | (mm)                         | (mm)             |                 |              | (kg)               | (psi)                      | (mm)                          | (mm)                 |
| U6091041GTK  | 6.00-9 12PR            | TT     | 165                          | 544              | 121             | A5           | 1450               | 145                        | 1610                          | 240                  |
| U6101041GTK  | 6.50-10 12PR           | TT     | 181                          | 592              | 125             | A5           | 1650               | 110                        | 1754                          | 262                  |
| U6121051GTK  | 7.00-12 14 PR          | TT     | 195                          | 674              | 134             | A5           | 2120               | 110                        | 2001                          | 300                  |
| U6151051GTK  | 8.15-15 (28X9-15) 14PR | TT     | 220                          | 710              | 146             | A5           | 3000               | 145                        | 2127                          | 322                  |
| U6152071GTK  | 8.25-15 18PR           | TT     | 240                          | 840              | 153             | A5           | 3650               | 145                        | 2495                          | 374                  |

- High traction
- High resistance against punctures and tears
- Special mixture that protects the integral structure of the tyre
- Tread structure designed for hard working conditions
- Longer service life
- Comfortable drive in operation




NEW  
PATTERN

FORXY  
SOLID FORKLIFT  
TYRES

| Tyre Information |                     |                 |           | Technical Information |               |                              |             |            |             |
|------------------|---------------------|-----------------|-----------|-----------------------|---------------|------------------------------|-------------|------------|-------------|
| Product Code     | Tyre Size           | Recommended Rim | Bead Type | Overall Diameter      | Section Width | Forklift<br>(Up to 25km / h) |             | Load Index | Speed Index |
|                  |                     |                 |           | (mm)                  | (mm)          | Load Wheel                   | Steer Wheel |            |             |
|                  |                     |                 |           |                       |               | (kg)                         | (kg)        | (LI)       | (SI)        |
| U7081010GTK      | 18x7-8              | 4.33R-8         | Quick Lip | 452                   | 160           | 2145                         | 1650        | 125        | A5          |
| U7101010GTK      | 200/50-10           | 6.50F-10        | Quick Lip | 457                   | 193           | 2470                         | 1900        | 130        | A5          |
| U7102010GTK      | 23x9-10 (225/75-10) | 6.50F-10        | Quick Lip | 583                   | 198           | 3445                         | 2650        | 142        | A5          |
| U7151010GTK      | 8.15-15 (28x9-15)   | 7.0-15          | Quick Lip | 689                   | 212           | 3445                         | 2650        | 142        | A5          |
| * U7103010GTK    | 6.50-10             | 5.00F- 10       | Quick Lip | 576                   | 165           | 2340                         | 1800        | 128        | A5          |
| * U7091010GTK    | 6.00-9              | 4.00E - 9       | Quick Lip | 528                   | 150           | 1885                         | 1450        | 121        | A5          |
| * U7121010GTK    | 7.00-12             | 5.00S- 12       | Quick Lip | 657                   | 175           | 2920                         | 2240        | 136        | A5          |

# LCV TYRES

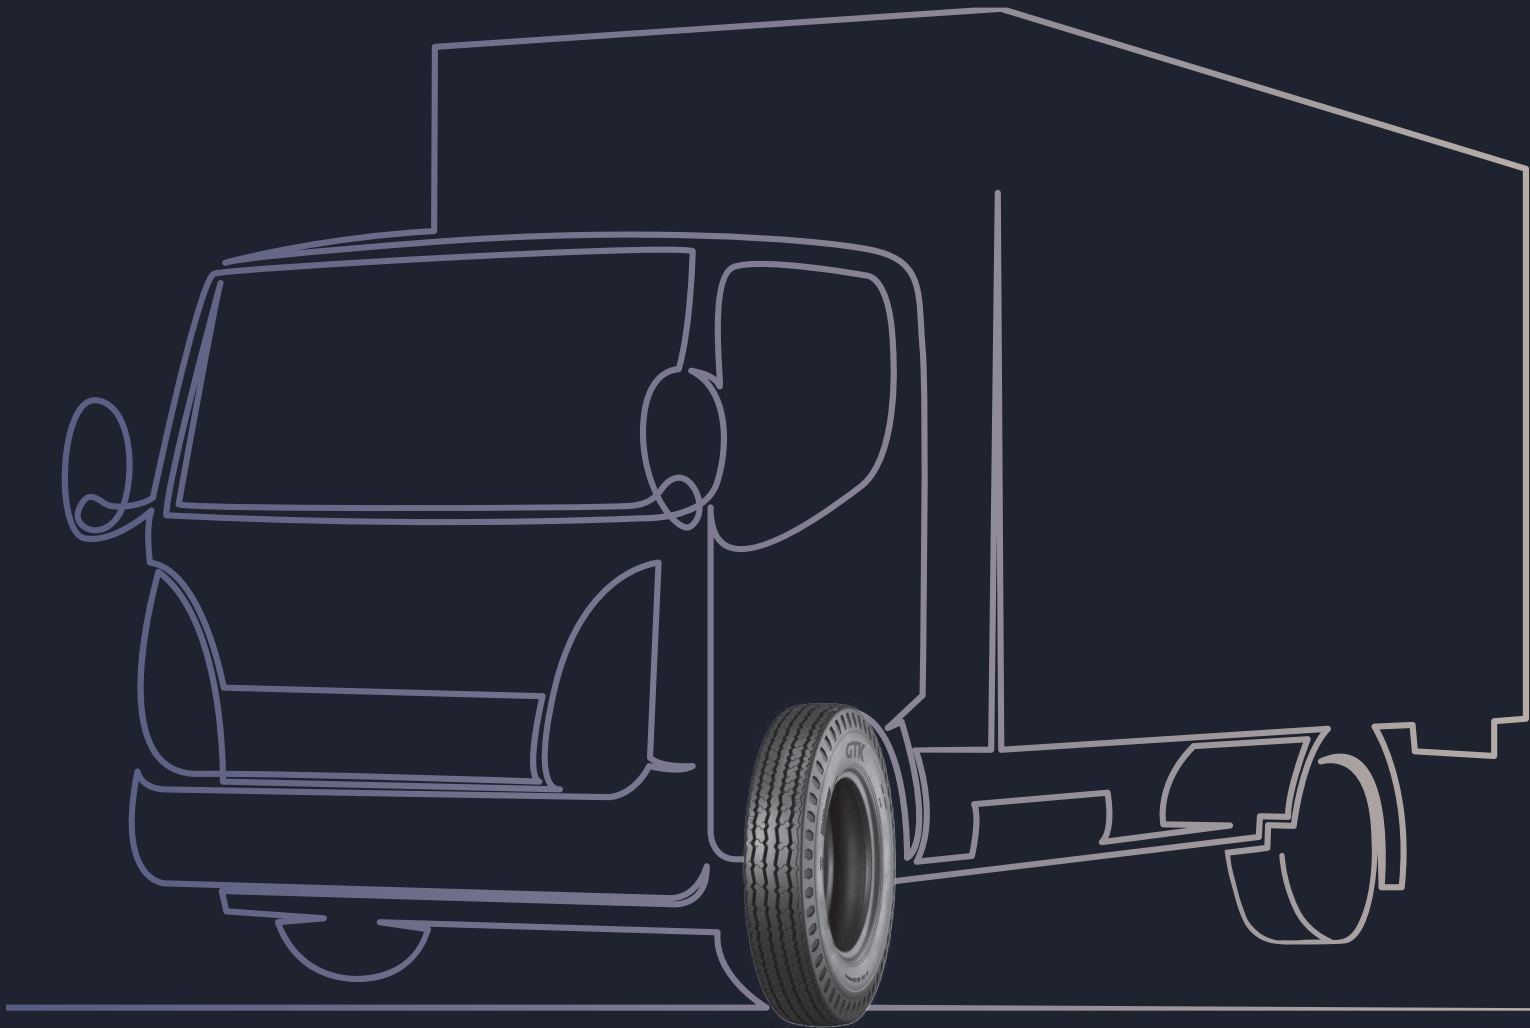



GTK

- Strong frame structure and high wear resistance
- Balanced driving thanks to its corrugated pattern
- Increased water discharge thanks to its corrugated gutters
- Increased road bend ability and excellent traction
- Retreadability feature



**KM400**  
**LIGHT TRUCK & MINIBUS TYRES**

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure        |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|------------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Load Capacity Per Axle | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)                   | (psi)                      | (mm)                          | (mm)                 |
| U2141021GTK  | 6.50-14 8PR            | TT      | 171                          | 647              | 97/95      | L            | 730/690*               | 65                         | 1918                          | 287                  |
| U2141031GTK  | 6.50-14 10PR           | TT      | 171                          | 647              | 100/98     | L            | 800/750*               | 72                         | 1918                          | 287                  |
| U2151031GTK  | 7.50-15 10PR           | TT      | 235                          | 789              | 114/112    | L            | 1180/1120*             | 76                         | 2318                          | 344                  |
| U2161031GTK  | 6.50-16 10 PR          | TT      | 176                          | 748              | 108/107    | L            | 1000/975*              | 73                         | 2216                          | 331                  |
| U2162031GTK  | 7.00-16 10PR           | TT      | 198                          | 785              | 113/112    | L            | 1150/1120*             | 76                         | 2317                          | 345                  |
| U2163041GTK  | 7.50-16 12PR           | TT      | 210                          | 810              | 121/120    | L            | 1450/1400*             | 94                         | 2386                          | 335                  |

GTK

- Optimum performance in traction and brakes due to special deep tread pattern
- Strong frame structure and high wear resistance
- Anti-stone increased water and mud resistance thanks to its surrounding gutters
- Retreadability feature



**TN50**  
**LIGHT TRUCK & MINIBUS TYRES**

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure        |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|------------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Load Capacity Per Axle | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)                   | (psi)                      | (mm)                          | (mm)                 |
| U2163241GTK  | 7.50-16 12PR           | TT      | 210                          | 810              | 121/120    | L            | 1450/1400*             | 94                         | 2386                          | 355                  |

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



**KM440**  
**LIGHT TRUCK & MINIBUS TYRES**

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure        |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|------------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Load Capacity Per Axle | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)                   | (psi)                      | (mm)                          | (mm)                 |
| U2163141GTK  | 7.50-16 12PR           | TT      | 210                          | 810              | 121/120    | L            | 1450/1400*             | 94                         | 2386                          | 355                  |

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



**KM420**  
**LIGHT TRUCK & MINIBUS TYRES**

| Product Code | Tyre Size & Ply Rating | TL / TT | Inflated Unloaded Dimensions |                  | Load Index | Speed Symbol | Load & Pressure        |                            |                               |                      |
|--------------|------------------------|---------|------------------------------|------------------|------------|--------------|------------------------|----------------------------|-------------------------------|----------------------|
|              |                        |         | Section Width                | Overall Diameter |            |              | Load Capacity Per Axle | Tyre Pressure At Max. Load | Dynamic Rolling Circumference | Static Loaded Radius |
|              |                        |         | (mm)                         | (mm)             |            |              | (kg)                   | (psi)                      | (mm)                          | (mm)                 |
| U2161131GTK  | 6.50-16 10PR           | TT      | 176                          | 748              | 108/107    | L            | 1000/975*              | 73                         | 2216                          | 331                  |
| U2162131GTK  | 7.00-16 10PR           | TT      | 198                          | 785              | 113/112    | L            | 1150/1120*             | 76                         | 2317                          | 345                  |
| U2151131GTK  | 7.50-15 10PR           | TT      | 235                          | 786              | 114/112    | L            | 1180/1120*             | 76                         | 2310                          | 342                  |
| U2163341GTK  | 7.50-16 12PR           | TT      | 210                          | 810              | 121/120    | L            | 1450/1400*             | 94                         | 2386                          | 355                  |



## Notes

[illegible]

## Notes

[illegible]



## Notes

[illegible]

## Notes

[illegible]





**HEADQUARTER / FACTORY**

Mahmutpaşa Mah. Kanalyolu Cad. No:129 41140  
Başiskele / Kocaeli TÜRKİYE - Tel: +90 262 349 50 00

**SALES OFFICE / WAREHOUSE**

Yaylacık Mah. Metin Sok. No:1 Başiskele / Kocaeli TÜRKİYE  
Tel: +90 262 349 50 00

**info@gtk.com.tr - www.gtktyres.com**

